

SOT-23 Plastic-Encapsulate Transistors


2SC1623 TRANSISTOR (NPN)

FEATURES

- High DC current gain : $h_{FE}=200$ (Typ) $V_{CE}=6V, I_C=1mA$
- High voltage: $V_{CEO}=50V$

MAXIMUM RATINGS ($T_a=25^\circ C$ unless otherwise noted)

| Symbol | Parameter | Value | Unit |
|-----------|-------------------------------|---------|------|
| V_{CBO} | Collector-Base Voltage | 60 | V |
| V_{CEO} | Collector-Emitter Voltage | 50 | V |
| V_{EBO} | Emitter-Base Voltage | 5 | V |
| I_C | Collector Current -Continuous | 100 | mA |
| P_c | Collector Power Dissipation | 200 | mW |
| T_J | Junction Temperature | 150 | °C |
| T_{stg} | Storage Temperature | -55-150 | °C |

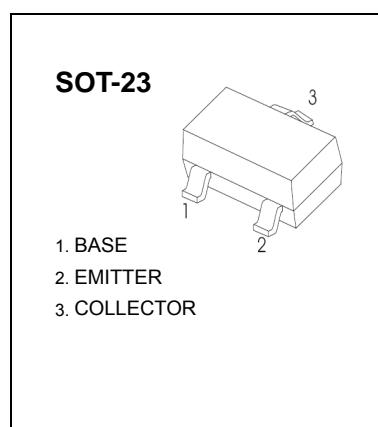ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$ unless otherwise specified)









| Parameter | Symbol | Test conditions | Min | Typ | Max | Unit |
|--------------------------------------|---------------|-----------------------|-----|-----|-----|---------|
| Collector-base breakdown voltage | $V_{(BR)CBO}$ | $I_C=100\mu A, I_E=0$ | 60 | | | V |
| Collector-emitter breakdown voltage | $V_{(BR)CEO}$ | $I_C=1mA, I_B=0$ | 50 | | | V |
| Emitter-base breakdown voltage | $V_{(BR)EBO}$ | $I_E=100\mu A, I_C=0$ | 5 | | | V |
| Collector cut-off current | I_{CBO} | $V_{CB}=60V, I_E=0$ | | | 0.1 | μA |
| Emitter cut-off current | I_{EBO} | $V_{EB}=5V, I_C=0$ | | | 0.1 | μA |
| DC current gain | h_{FE} | $V_{CE}=6V, I_C=1mA$ | 90 | 200 | 600 | |
| Collector-emitter saturation voltage | $V_{CE(sat)}$ | $I_C=100mA, I_B=10mA$ | | | 0.3 | V |
| Base-emitter saturation voltage | $V_{BE(sat)}$ | $I_C=100mA, I_B=10mA$ | | | 1 | V |
| Transition frequency | f_T | $V_{CE}=6V, I_C=10mA$ | | 250 | | MHz |

CLASSIFICATION OF h_{FE}

| Rank | L4 | L5 | L6 | L7 |
|---------|--------|---------|---------|---------|
| Range | 90-180 | 135-270 | 200-400 | 300-600 |
| Marking | L4 | L5 | L6 | L7 |

Typical Characteristics

2SC1623

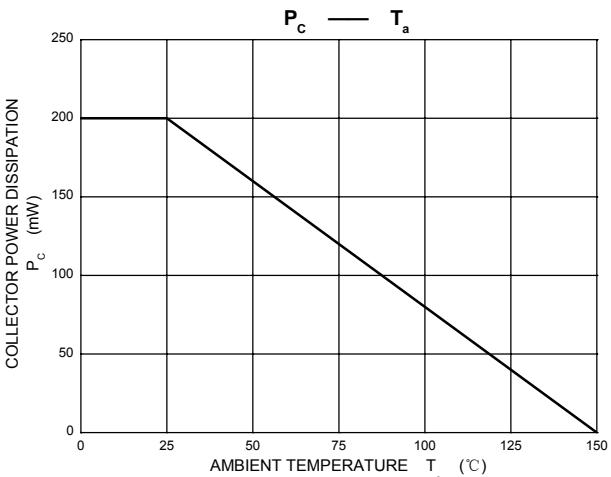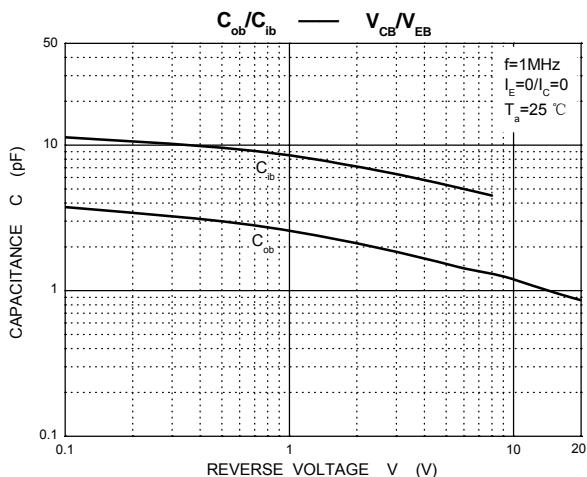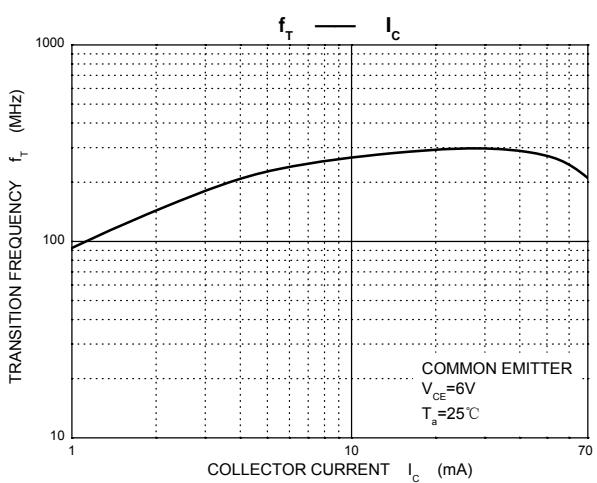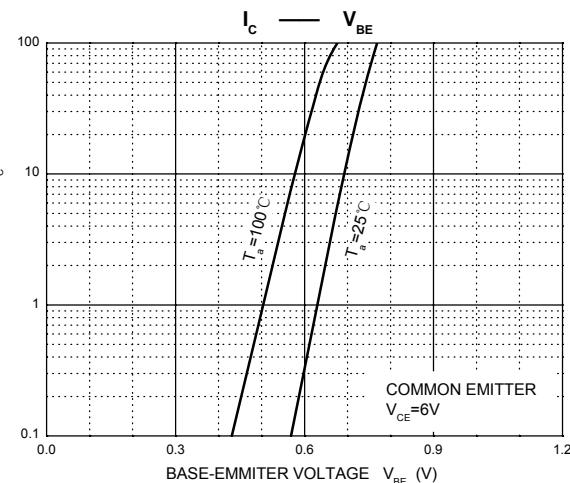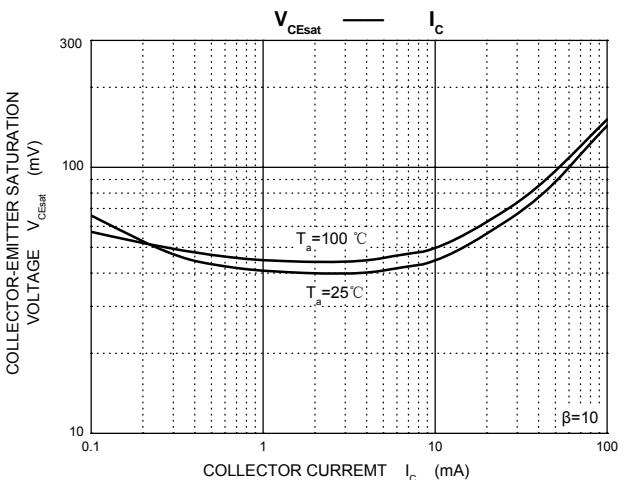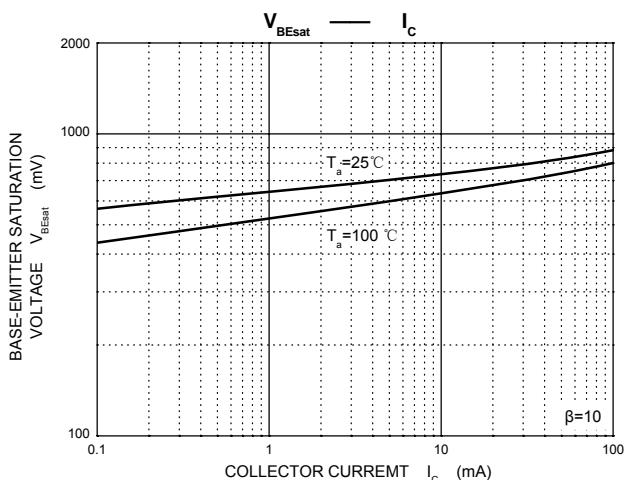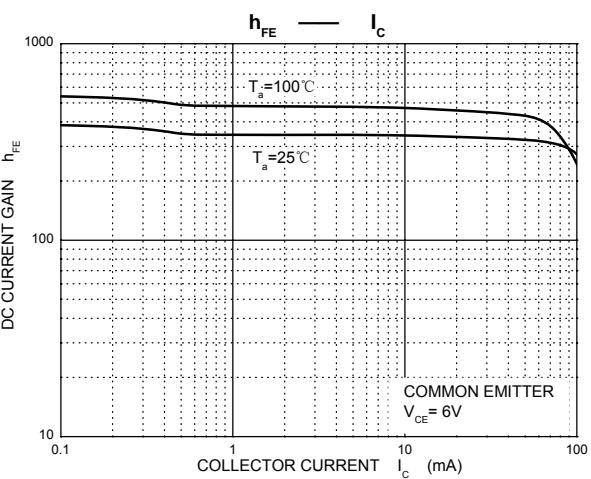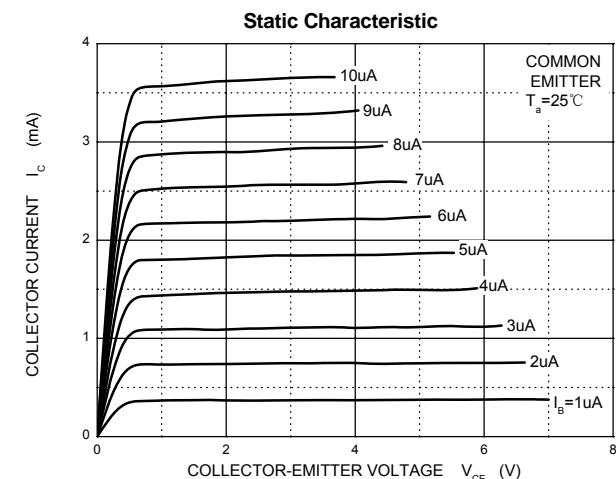

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Youtai manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)