


Bulk Cable Specification

TFDL Series Category 5e Cable

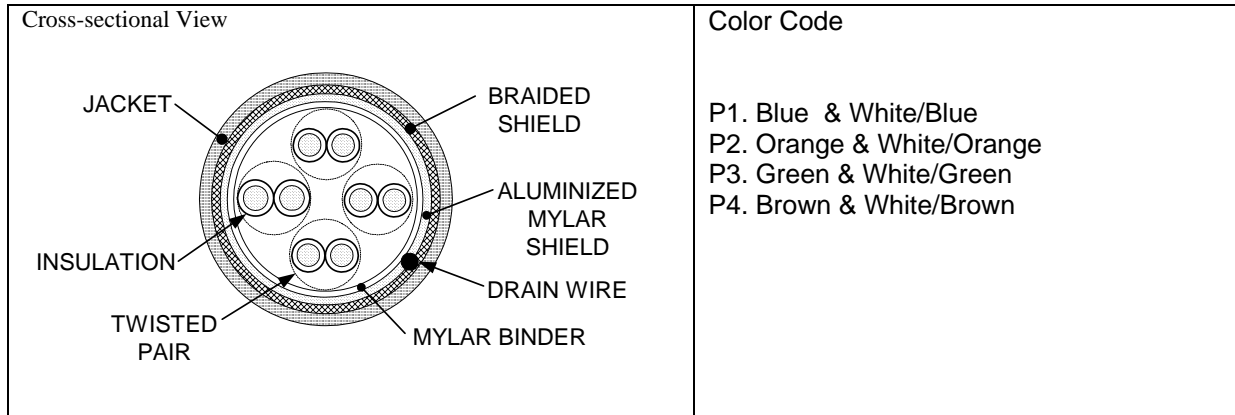

ITEM		DESCRIPTION
Conductor	No. of Conductors	4 Pairs
	Material	Bare Copper
	Construction	26 AWG stranded (7X34)
Insulation	Material	Polyolefin
	Nominal Thickness	.0087"
Shielding	Material	Aluminized Mylar Tape
	Coverage	125%
	Material	Mylar Tape
	Coverage	100%
Braiding	Material	Tinned Copper
	Coverage	65%
	Construction	40 AWG
Jacket	Material	Low Smoke Zero Halogen
	Nominal Diameter	.236" +/- .008 [6.0mm +/- .20mm]
	Color	TFDL2004 Gray (RAL 7044) TFDL2005 Black (RAL 9005) TFDL2006 Red (RAL 3027)
Drain Wire	Material	Tinned copper
	Construction	24 AWG (7x32)

Jacket Marking:
L-COM, INC WWW.L-COM.COM VERIFIED TO TIA/EIA-568-B.2 Cat 5e 26AWG LSZH S/FTP
ROHS WW/YY

ELECTRICAL PROPERTIES

Dielectric Strength: 500 Vac / 1min

ENVIRONMENTAL

RoHS Compliant
Operating Temperature: -20°C to 75°C

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [l-com](#) manufacturer:

Other Similar products are found below :

[FOA-550A](#) [UMC-201](#) [CSMN50MF-5](#) [CSMNB15MF-15](#) [TRD815RA2BL-5](#) [CA3N050](#) [CA3A-90DA-1M](#) [CTLF3VGAMM-20](#) [HDCAMM-3](#)
[U3A00014-03M](#) [ECF-SK-25](#) [CSMT15MF-10](#) [CSMT15MM-15](#) [CSMT15MM-25](#) [CSPL15MF-50](#) [CSPL25MF-25](#) [CSPL9MF-10](#) [CSPL9MF-](#)
[5](#) [CSPL25MF-5](#) [CSPL25MF-2.5](#) [AL-IPEPS](#) [NB201611-10F-1](#) [TDG1026KC5-MNL](#) [NB121005-10F](#) [TRD855SRA6DBL-10M](#)
[TRD855SRA7DBL-1M](#) [TRD855SRA7DBL-10M](#) [PR175SCDLCQ24](#) [TRG508-T4T-3M](#) [TRA5261-15F](#) [TRA5261S-1F](#) [TRA6261-1F](#)
[USBBFT](#) [DGB25M](#) [CASATAL-18](#) [CSM25MM-10](#) [CSM37MF-10](#) [CSUSB-100](#) [CA3A-90RA-1M](#) [CA3A-90RMICB-1M](#) [U2A00003-3M](#)
[U3A00003-05M](#) [U2A00008-12I](#) [U3A00007-075M](#) [U3A00007-1M](#) [CSMT15MF-5](#) [CSMT15MM-50](#) [CSPL15MF-25](#) [LPXT-WP-PMT](#)
[CSMT15MF-50](#)