


P2532

Non-Replaceable Probe - Epoxy Mount

Product Family: Pylon

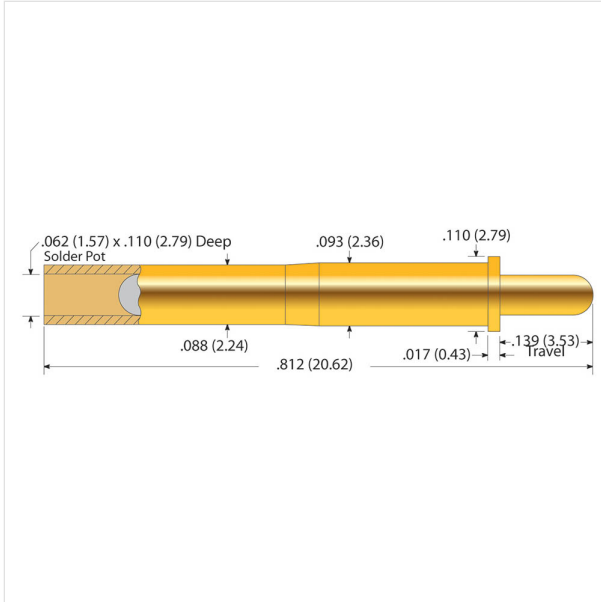

Springs

Force Type - Preload in oz (g) - Rec. Travel in oz (g) -

Spring Material

Standard - 1.00 (28.00) - 2.30 (65.00) - Gold plated

Mechanical:

Test Center (mil): 156

Test Center (mm): 3.96

Overall Length (mil): 812

Overall Length (mm): 20.62

Full Travel (mil): 139

Full Travel (mm): 3.53

Recommended Travel (mil): 93

Recommended Travel (mm): 2.36

Rec. Mounting Hole Size (mil): 94.5

Rec. Mounting Hole Size (mm): 2.40

Recommended Drill Size: #41 or 2.40 mm

Thermal:

Max Operating Temp (°C): 150

Min Operating Temp (°C): -55

Electrical:

Current Rating (Amps): 5

Average DC Resistance lower than (mOhm): 30

Materials & Finishes:

Plunger Material: Heat-treated BeCu, Gold plated over hard Nickel

Barrel Material: Brass, Gold plated

Ball Material: Gold plated, Stainless Steel

TIPS:


Tip Materials: BeCu

Tips:

P2532_1



P2532_2



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [everett charles](#) manufacturer:

Other Similar products are found below :

[C-S-C](#) [P5160G-2W1S](#) [P3158G-1W1S](#) [P2662AG-1C1S](#) [P2663G-1W1S](#) [PR261-1](#) [LFRE-25H-8](#) [P2663G-1P1S](#) [HCP-15H](#) [HCP-25H](#)
[P2662AG-1R1S](#) [P2665G-1C1S](#) [P2662BG-2V1S](#) [P2757G-1C1S](#) [P2757G-1R1S](#) [P3158G-1Q1S](#) [P2665G-1W1S](#) [P5160G-1Q1S](#) [P5160G-3C1S](#)
[S2662A-3ED](#) [P2665G-1V1S](#) [EPA-5H](#) [HPA1A](#) [P3158G-3C1S](#) [P2664G-4V1S](#) [P2757G-3W1S](#) [E-S-F](#) [S2663-1ED](#) [EPA-4F](#) [P2663G-1V1S](#)
[P2447-1W](#) [PR54-1](#) [HCP-14H](#) [GPP-95-2](#) [P2662BG-1R1S](#) [P2663G-1R1S](#) [HPA-0B](#) [PR80-1](#) [F-S-C](#) [P2532-1](#) [P4301-1F](#) [EPA-2H](#) [A-S-R](#) [EPA-](#)
[3H](#) [PR541-1](#) [E-S-R](#) [EPA-2A](#) [SPA3H](#) [POGO-25J-4](#) [SPR-5W](#)