






RoHS

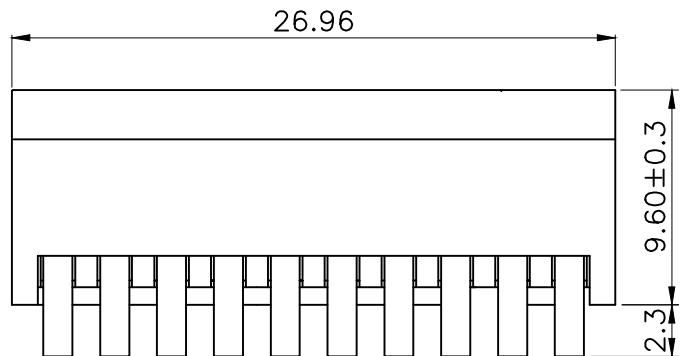

Circuit Diagram

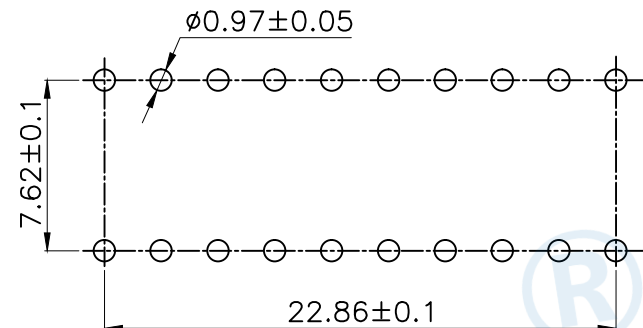

PCB Layout(Pattern Side)

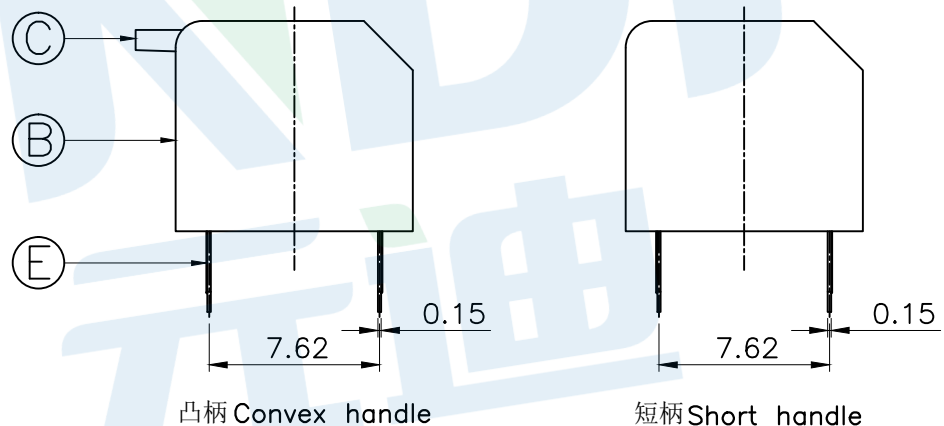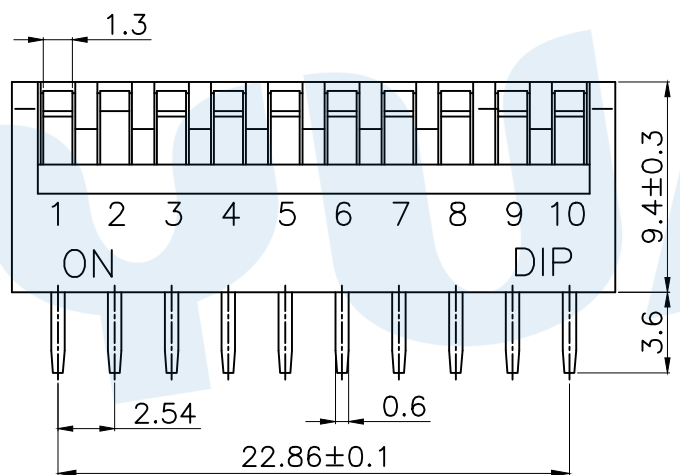

凸柄 Convex handle

短柄 Short handle

NOTE:

- 1.Rating: 24V 25mA DC
- 2.Insulation Resistance: $\geq 100 \text{ M}\Omega$
- 3.Withstand voltage: AC 500V 1Minute
- 4.Operating Force Range: 400gf Max
- 5.Mechanical Life: 3,000 Cycles

| Number of digits(位数) | 1P | 2P | 3P | 4P | 5P | 6P | 7P | 8P | 9P | 10P | 12P |
|-----------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| Cover/red 凸柄 Convex handle | TE-01 | TE-02 | TE-03 | TE-04 | TE-05 | TE-06 | TE-07 | TE-08 | TE-09 | TE-10 | TE-12 |
| 盖子/红色 短柄 Short handle | TE-01D | TE-02D | TE-03D | TE-04D | TE-05D | TE-06D | TE-07D | TE-08D | TE-09D | TE-10D | TE-12D |
| Cover/blue 凸柄 Convex handle | TE-01R | TE-02R | TE-03R | TE-04R | TE-05R | TE-06R | TE-07R | TE-08R | TE-09R | TE-10R | TE-12R |
| 盖子/蓝色 短柄 Short handle | TE-01L | TE-02L | TE-03L | TE-04L | TE-05L | TE-06L | TE-07L | TE-08L | TE-09L | TE-10L | TE-12L |

| | | | | | |
|-----|--------------|--------|-----|-------------------|--------------|
| Ⓔ | Terminal | | 20 | Phosphorus bronze | Gold plating |
| Ⓓ | Potting glue | | | Epoxy resin | Black |
| Ⓒ | Handle | | 10 | PBT | White |
| Ⓑ | Cover | | 1 | PBT | Red/Blue |
| Ⓐ | Base | | 1 | PBT | Black |
| NO. | Name | Number | Qty | Materil | Remarks |

YUANDI® Yuandi Electronics Co, Ltd
元迪

| | | | |
|----------|------|-------|------------|
| design | date | name | DIP SWITCH |
| Review | date | model | TE-10R |
| Approved | date | | |

Drawing number: Proportion 1:1 unit mm gage number A4

modify Review Approved Tolerance not specified

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIP Switches/SIP Switches](#) category:

Click to view products by [Yuandi](#) manufacturer:

Other Similar products are found below :

[79B10T](#) [8136-475G4T](#) [G7G-1A2-CB-DC12](#) [H7CZL8AC100240](#) [DRR60016](#) [DRS4016](#) [1825444-1](#) [200183](#) [206002](#) [219-6LPSTRF](#)
[25.350.0653.0](#) [SBS 5004 TG](#) [SDA10H1BDA](#) [97R06ST](#) [A2C-2A5](#) [1825444-7](#) [ADE08SA04](#) [ADE12S04](#) [192960010](#) [206005RAS](#) [206007](#) [2-](#)
[1825058-8](#) [25.330.0653.1](#) [25.352.0353.0](#) [CXDRIVEV2X](#) [IKN0600000](#) [IKN0800000](#) [LA2-002-DC24](#) [DSR02T](#) [DSS 208 N](#)
[E2FMX2D1M1TGJ03M](#) [NDI10H](#) [219-9MSTP](#) [EPM02FV](#) [206010RAST](#) [219-5LPSTJRF](#) [NDS08V](#) [76SB05](#) [TD06H0SK1](#) [Z7.255.9027.0](#) [1-](#)
[1825058-3](#) [1825428-4](#) [219-10LPSTF](#) [E3ZG6111D03M](#) [G4D212PUSTV2DC5](#) [EPG301BT06](#) [219-7LPSTRF](#) [1-1825058-6](#) [E3TSL23M5J03M](#)
[Y5795](#)