



specification

SHEET FOR APPROVAL

Part Name: _____ electro-magnetic buzzer _____
 Type: _____ YX-KC9055 _____
 Customer Name: _____
 Number of the Edition: _____



	Approved by	Checked by	Issued by
Signature			
Date			

Yue Xin Electronics Co., Ltd.
 Add: People Industrial Park Chen Bao Town Xinghua City Jiangsu province China
 Tel: +86 0523 83722059 Fax: +86 0523 83722259
 Mob/whatsapp: +8615952695023 Mail: anna@xhyxdz.com
 Web: www.xhyxdz.com



Electro-magnetic Buzzer

YX-KC9055




Electrical Characteristics

Model No.	YX-KC9055		
Rated Voltage(Vo-p)	1.5	3	5
Operating Voltage (Vo-p)	1-3	2~4	4~6
*Rated Current (mA)			
*Sound Output at 10cm (dB)	80	80	80
Resonant Frequency (Hz)	2731		
Coil Resistance(Ω)	5.5 ± 1	16 ± 3	40 ± 4
Operating Temperature (°C)	-20~+70		
Storage Temperature (°C)	-30~+80		
Weight (g)	1		
Housing Material	PPO		

Appearance Drawing

(UNT : mm) Tolerance : $\pm 0.5\text{mm}$ Except Specified

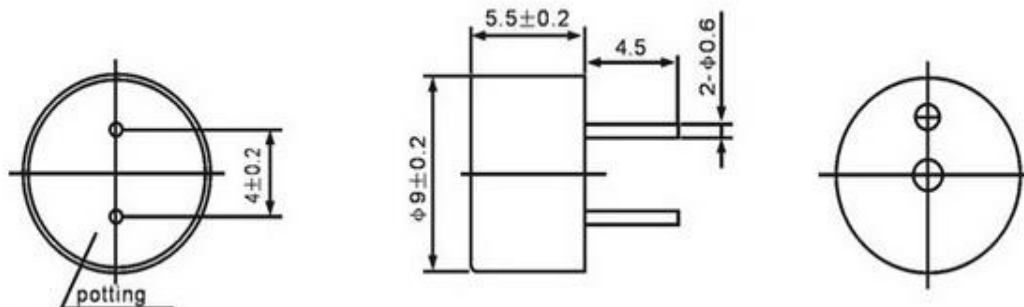

Yue Xin Electronics Co., Ltd.

Add: People Industrial Park Chen Bao Town Xinghua City Jiangsu province China

Tel: +86 0523 83722059 Fax: +86 0523 83722259

Mob/whatsup: +8615952695023 Mail: anna@xhyxdz.com

Web: www.xhyxdz.com




Electro-magnetic Buzzer


YX-KC9055



Testing Method:

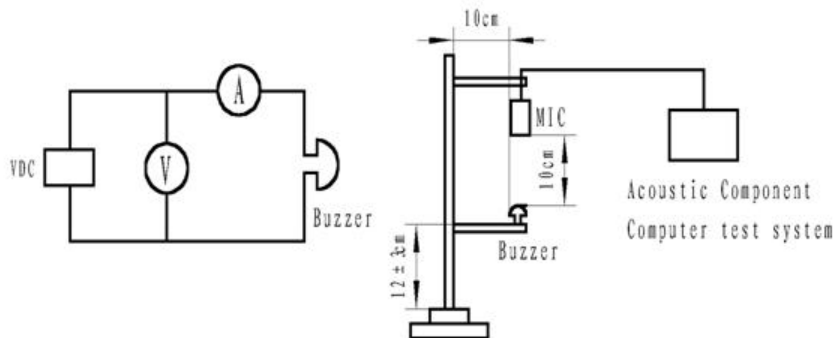

Frequency Response:

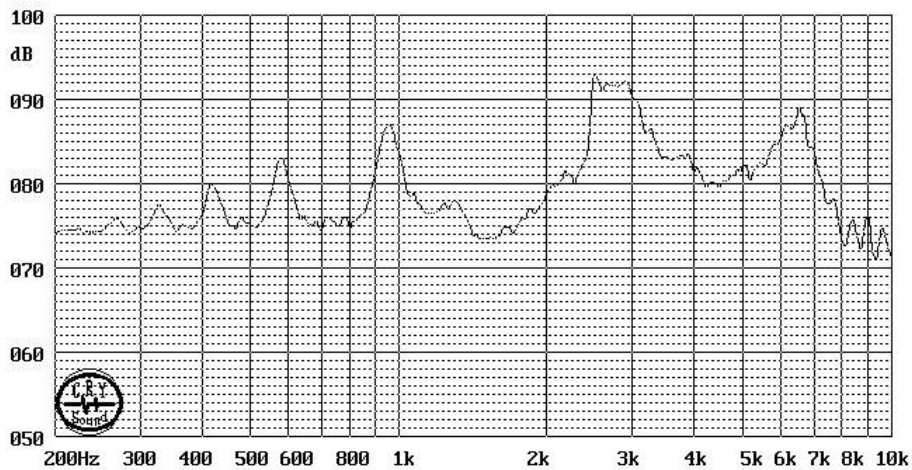

Yue Xin Electronics Co., Ltd.

Add: People Industrial Park Chen Bao Town Xinghua City Jiangsu province China

Tel: +86 0523 83722059 Fax: +86 0523 83722259

Mob/whatsapp: +8615952695023 Mail: anna@xhyxdz.com

Web: www.xhyxdz.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Piezo Buzzers & Audio Indicators](#) category:

Click to view products by [YUEXIN](#) manufacturer:

Other Similar products are found below :

[PFD-21A29W](#) [PLD-21N30W](#) [REM-6027F-1.5](#) [RH1020C-010-NFP-G-NL](#) [PFD-27N36W](#) [KBS-20DA-7AS](#) [KBS-27DA-5C-105](#)
[RFS5015382PNL](#) [MSR516NP](#) [DMT-1606S-NL](#) [OMT112](#) [SCE016SD3CM4B](#) [DMT-09-1-4B-NL](#) [HBO0302C-58/1248](#) [AT-3045-TF-LW110-R](#) [SMA-17-S](#) [BMS3650L-LF](#) [SMT-0540-T-7-R](#) [SMT-0540-T-2-R](#) [AT-0927-TT-2-R](#) [AT-2310-T-LW100-R](#) [SMI-1324-TW-5V-4-R-T/R](#)
[SC0715BL](#) [AI-1027-TWT-5V-R](#) [SC235AF](#) [SMT-0827-TW-5V-R](#) [AT-2830-TWT-R](#) [AT-1220-TT-5-R](#) [AT-1220-TT-10-R](#) [AT-1127-ST-2-R](#)
[AT-1220-TWT-5V-R](#) [AT-1750-TFL-LW95-R](#) [AI-2437-TWT-R](#) [SMT-1427-S-R](#) [SMT-1127-S-R](#) [AI-3245-TF-LW95-R](#) [AI-2438-TT-R](#)
[AB2040B](#) [SMI-1324-TW-3V-R](#) [SMT-1324-TW-5V-R](#) [AT-2429-TWT-R](#) [AI-1223-TWT-12V-3-R](#) [AI-1440-TWT-24V-2-R](#) [AB4113B](#) [AI-1223-TWT-5V-4-R](#) [X-4028-P-C32-R](#) [AI-2304-TF-LW120-12V-R](#) [AI-4329-P-SP28-R](#) [XL-5020-TF-LW150-S-R](#) [SMA-30-P17.5](#)