

EMC filters

3-line filters for converters and power electronics Rated current 8 to 180 A

Series/Type: B84143A*R000 Date: January 2006



for converters and power electronics

Power line filters for 3-phase systems Rated voltage 480/275 V AC, 50/60 Hz Rated current 8 to 180 A

Alternative version

 Series B84143A*R105 offers a low-cost solution

Construction

- 3-line filter
- Metal case

Features

- High insertion loss
- Optimized leakage current
- Easy to install
- Degree of protection: IP 201)
- Optimized for long motor cables and operation under full load
- Design complies with EN 133200, UL 1283, CSA C22.2 No.8
- UL approval

Applications

- Frequency converters for motor drives, e.g.
 - elevators
 - pumps
 - traction systems
 - conveyor systems
 - HVAC systems (heating, ventilation and air conditioning)
- Wind farms
- Power supplies

Terminals

Finger-safe terminal blocks

Marking

Marking on component:
Manufacturer's logo, ordering code,
rated voltage, rated current, rated temperature,
climatic category, date code


Minimum marking on packaging: Manufacturer's logo, ordering code

¹⁾ To IEC 60529



for converters and power electronics

Typical circuit diagram

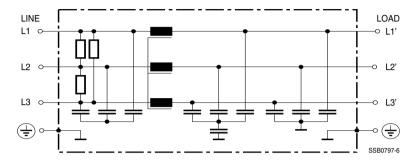

Technical data and measuring conditions

Rated voltage V _R	480/275 V AC, 50/60 Hz
Rated current I _R	Referred to 40 °C ambient temperature
Test voltage V _{test}	1770 V DC, 2 s (line/line) 2700 V DC, 2 s (lines/case)
Overload capability (thermal)	1.5 · I _R for 3 min per hour or 2.5 · I _R for 30 s per hour
Leakage current I _{leak}	At 400 V AC, 50 Hz
Climatic category (IEC 60068-1)	25/100/21 (-25 °C/+100 °C/21 days damp heat test)
Approvals	UL 1283 for 440/250 V AC



for converters and power electronics

Characteristics and ordering codes

V _R AC	I _R	Terminal cross section	I _{leak}	R _{typ}	Approx. weight	Ordering code	Approvals
V	Α	mm ²	mA	mΩ	kg		(440/250 V)
480/275	8	4	< 3.5	40	2.2	B84143A0008R000	×
	12	4	< 3.5	20	2.2	B84143A0012R000	×
	16	4	< 3.5	15	2.2	B84143A0016R000	×
	25	10	< 3.5	8	3.7	B84143A0025R000	×
	36	10	< 3.5	3.8	3.7	B84143A0036R000	×
	50	10	< 6	2.0	4.0	B84143A0050R000	×
	80	25	< 6	1.0	9.5	B84143A0080R000	×
	120	50	< 6	0.75	10	B84143A0120R000	×
	150	50	< 6	0.4	10	B84143A0150R000	×
	180	95	< 6	0.4	13	B84143A0180R000	×


x = approval granted

For filters for higher currents see B84143B*S080.

For filters for compact dimensions see B84143A*R105.

Dimensional drawings


B84143A0008R000 ... A0016R000 (8 ... 16 A)






for converters and power electronics

B84143A0025R000 ... A0050R000 (25 ... 50 A)

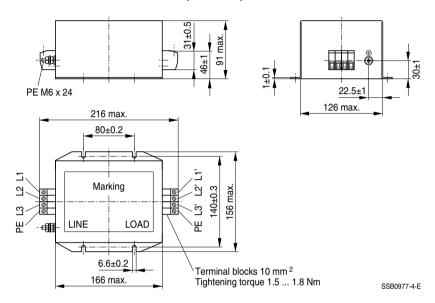


B84143A0080R000 (80 A)

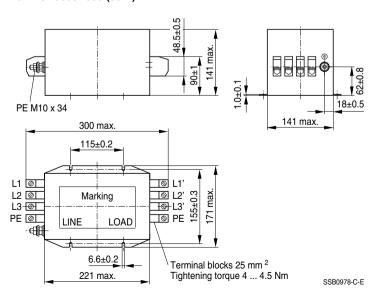




for converters and power electronics

B84143A0120R000, B84143A0150R000 (120 and 150 A)

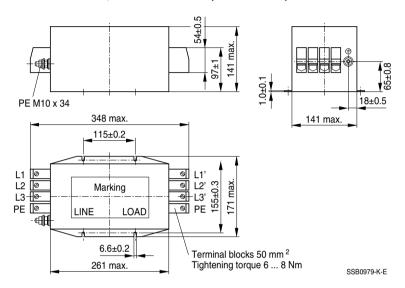

B84143A0180R000 (180 A)

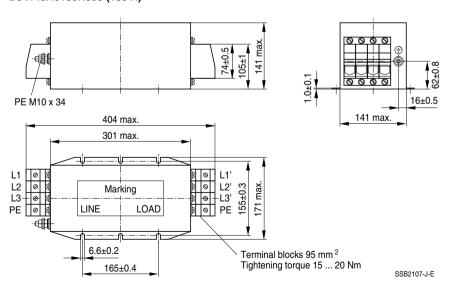



for converters and power electronics


Insertion loss (typical values at $Z = 50 \Omega$)

unsymmetrical, adjacent branches terminated


---- common mode, all branches in parallel (asymmetrical)

- - - - - - differential mode (symmetrical)


Filters for 8 A




Filters for 12 A



Filters for 16 A



Filters for 25 A





for converters and power electronics


Insertion loss (typical values at $Z = 50 \Omega$)

unsymmetrical, adjacent branches terminated


----- common mode, all branches in parallel (asymmetrical)

– – – – – – differential mode (symmetrical)


Filters for 36 A




Filters for 50 A



Filters for 80 A



Filters for 120 ... 180 A





EMC filters

Cautions and warnings

Important information

Please read all safety and warning notes carefully before installing the EMC filter and putting it into operation (see \triangle). The same applies to the warning signs on the filter. Please ensure that the signs are not removed nor their legibility impaired by external influences.

Death, serious bodily injury and substantial material damage to equipment may occur if the appropriate safety measures are not carried out or the warnings in the text are not observed.

Using according to the terms

The EMC filters may be used only for their intended application within the specified values in low-voltage networks in compliance with the instructions given in the data sheets and the data book. The conditions at the place of application must comply with all specifications for the filter used.

⚠ Warnings

- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. EMC filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off.
- The protective earth connections shall be the first to be made when the EMC filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective-earth connection must be observed.
- Impermissible overloading of the EMC filter, such as impermissible voltages at higher frequencies that may cause resonances etc. can lead to destruction of the filter housing.
- EMC filters must be protected in the application against impermissible exceeding of the rated currents by suitable overcurrent protective.



EMC filters

Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous"). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.
 - We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version
 of the "General Terms of Delivery for Products and Services in the Electrical Industry"
 published by the German Electrical and Electronics Industry Association (ZVEI).
- The trade names EPCOS, EPCOS-Jones, Baoke, CeraDiode, CSSP, MLSC, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, UltraCap, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by EPCOS manufacturer:

Other Similar products are found below:

5B1 6609019-3 6609026-5 6609030-6 6609063-2 6609973-2 7-1609090-5 F1500CA06 F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B-1-06 FN2080B-10-06 FN2090A-1-06 FN2410H-32-33 FN2410H-80-34 FN2412H-16-44 FN420-1-13 FP144 8-6609089-0 12-MMB-030-11-D B84144A0050R120 B84144A90R120 20B1 RSEL-2001A 2B1 LP183 1-6609070-1 F1500CA10 1B1 FN2020A-10-06 FN2020B-3-06 FN2060A-3-06 FN2070A-16-06 FN2070B-16-08 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-25-33 FN2412H-8-44 FN610R-3-06 20EHZ7 20K1 30B6 30BCF10R 3K1