


<b>Nominal Voltage:</b>	1.5 V
<b>Operating Voltage</b>	1.6 - 0.75V
<b>Impedance:</b>	120 m-ohm @ 1kHz
<b>Typical Weight:</b>	24 gm (0.8 oz.)
<b>Typical Volume:</b>	8.4 cm <sup>3</sup> (0.5 in. <sup>3</sup> )
<b>Terminals:</b>	Flat
<b>Storage Temperature Range:</b>	-20 °C to 35 °C
<b>Operating Temperature Range:</b>	-20 °C to 54 °C (-4 °F to 130 °F)
<b>ANSI:</b>	15A
<b>IEC:</b>	LR6

TYPICAL DISCHARGE CHARACTERISTICS AT 21°C (70°F)

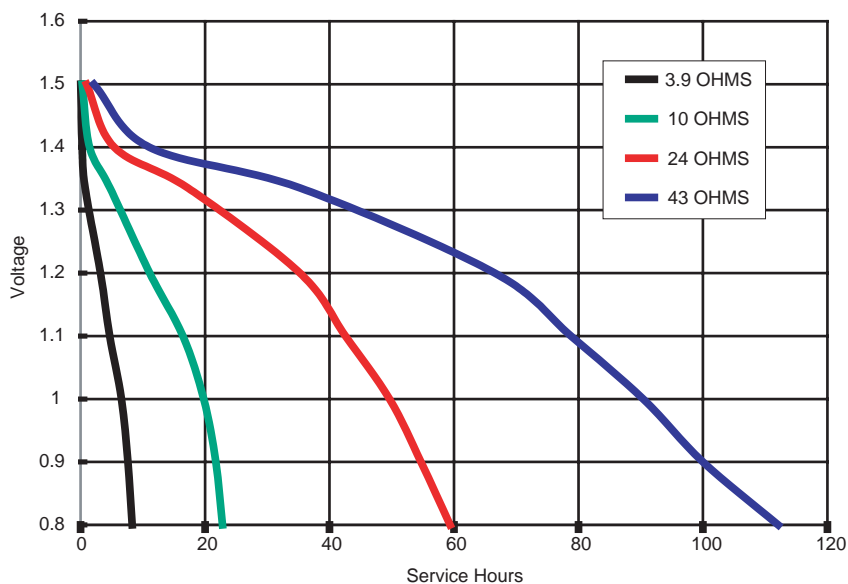




**DURACELL®**  
 BATTERIES

Berkshire Corporate Park  
 Bethel, CT 06801 U.S.A.  
 Telephone: Toll-free 1-800-544-5454  
 Internet: www.duracell.com

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.



Zn/MnO<sub>2</sub>

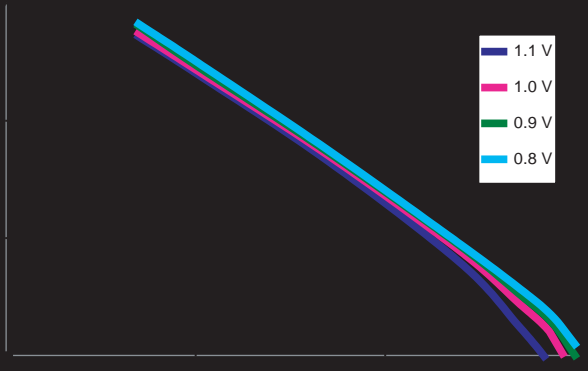

www.duracell.com

# X-ON Electronics

Authorized Distributor

*Click to view similar products for [Duracell](#) manufacturer.*

Other Similar products are found below :

[10ET](#) [13ET](#) [15035025M3PP3](#) [15035031M3C2PK](#) [15063765](#) [312ET](#) [357303SR44](#)  
[364D364V364SR60](#) [371370](#) [377SR66](#) [392](#) [395](#) [3LR12INDUSTRIAL](#) [5000394002562](#)  
[5000394002692](#) [5000394002746](#) [5000394002852](#) [5000394002883](#) [5000394002906](#)  
[5000394002951](#) [5000394004030](#) [5000394017764](#) [5000394017825](#) [5000394018549](#)  
[5000394019126](#)