RENESAS

2SC5337

NPN Silicon RF Transistor for High-Frequency Low Distortion Amplifier 4-Pin Power Minimold

FEATURES

- Low distortion: $IM_2 = 59.0 \text{ dB}$ TYP., $IM_3 = 82.0 \text{ dB}$ TYP. @ Vce = 10 V, Ic = 50 mA
- Low noise

NF = 1.5 dB TYP. @ Vce = 10 V, Ic = 50 mA, f = 500 MHz

- NF = 2.0 dB TYP. @ Vce = 10 V, Ic = 50 mA, f = 1 GHz
- 4-pin power minimold package with improved gain from the 2SC4536

<R> ORDERING INFORMATION

Part Number	Order Number	Package	Quantity	Supplying Form
2SC5337	2SC5337-AZ	4-pin power	25 pcs (Non reel)	Magazine case
2SC5337-T1	2SC5337-T1-AZ	minimold (Pb-Free) ^{Note}	1 kpcs/reel	12 mm wide embossed tapingCollector face the perforation side of the tape

Note Contains Lead in the part except the electrode terminals.

Remark To order evaluation samples, please contact your nearby sales office. Unit sample quantity is 25 pcs.

ABSOLUTE MAXIMUM RATINGS (TA = +25°C)

Parameter	Symbol	Ratings	Unit
Collector to Base Voltage	Vсво	30	V
Collector to Emitter Voltage	Vceo	15	V
Emitter to Base Voltage	Vebo	3.0	V
Collector Current	lc	250	mA
Total Power Dissipation	Ptot Note	2.0	W
Junction Temperature	Tj	150	°C
Storage Temperature	Tstg	-65 to +150	°C

Note Mounted on 16 $\text{cm}^2 \times 0.7 \text{ mm}$ (t) ceramic substrate (Copper plating)

CAUTION

Observe precautions when handling because these devices are sensitive to electrostatic discharge.

The mark <R> shows major revised points.

The revised points can be easily searched by copying an "<R>" in the PDF file and specifying it in the "Find what:" field.



R09DS0047EJ0300 Rev.3.00 Sep 14, 2012

<R> ELECTRICAL CHARACTERISTICS (TA = +25°C)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
DC Characteristics						
Collector Cut-off Current	Ісво	V _{CB} = 20 V, I _E = 0	_	0.01	5.0	μA
Emitter Cut-off Current	Іево	V _{BE} = 2 V, Ic = 0	-	0.03	5.0	μA
DC Current Gain	hfe Note 1	Vce = 10 V, Ic = 50 mA	60	120	200	-
RF Characteristics						
Insertion Power Gain	S _{21e} ²	Vce = 10 V, Ic = 50 mA, f = 1 GHz	7.0	8.3	-	dB
Noise Figure (1)	NF Note 2	V _{CE} = 10 V, I _C = 50 mA, f = 500 MHz	-	1.5	3.5	dB
Noise Figure (2)	NF Note 2	Vce = 10 V, Ic = 50 mA, f = 1 GHz	-	2.0	3.5	dB
2nd Order Intermoduration Distortion	IM2		-	59.0	-	dB
3rd Order Intermoduration Distortion	IМз		-	82.0	-	dB

Notes 1. Pulse measurement: PW $\leq 350~\mu s,$ Duty Cycle $\leq 2\%$


2. Rs = RL = 50 Ω , tuned

<R> hfe CLASSIFICATION


Rank	QR/YQR	QS/YQS	
Marking	QR	QS	
hfe Value	60 to 120	100 to 200	




TYPICAL CHARACTERISTICS (Unless otherwise specified, TA = +25°C)





COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE





Collector to Emitter Voltage VCE (V)









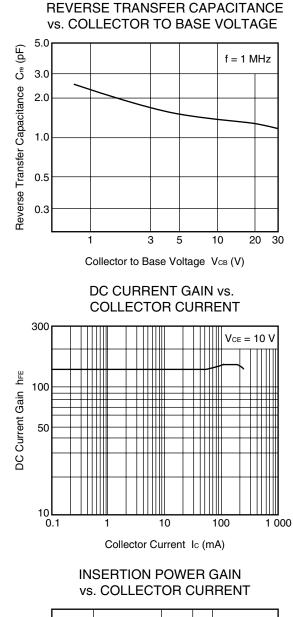



RENESAS

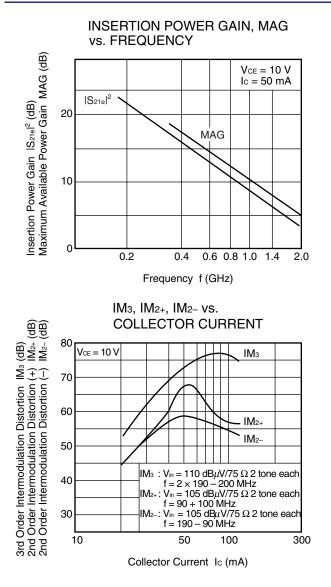



Collector Current Ic (mA)

Remark The graphs indicate nominal characteristics.

<R> S-PARAMETERS

S-parameters and noise parameters are provided on our web site in a form (S2P) that enables direct import of the parameters to microwave circuit simulators without the need for keyboard inputs.

Click here to download S-parameters.


 $[\text{Products}] \rightarrow [\text{RF Devices}] \rightarrow [\text{Device Parameters}]$

URL http://www.renesas.com/products/microwave/



PACKAGE DIMENSIONS

4-PIN POWER MINIMOLD (UNIT: mm)

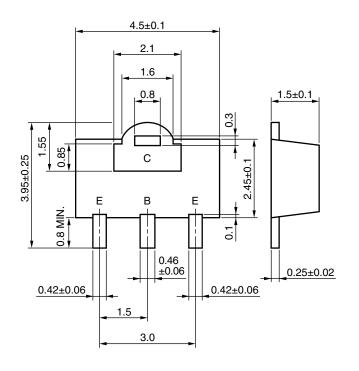

PIN CONNECTIONS

- E: Emitter
- C: Collector
- B: Base

R09DS0047EJ0300 Rev.3.00 Sep 14, 2012



Revision History

2SC5337 Data Sheet

		Description		
Rev.	Date	Page	Summary	
1.00	Mar 01, 1996	-	First edition issued	
2.00	Aug 28, 2001	-	Second edition issued	
2.10	Sep 06, 2001	-	Second V1 edition issued	
3.00	Sep 14, 2012	Throughout	The company name is changed to Renesas Electronics Corporation.	
		p.1	Modification of ORDERING INFORMATION	
		p.2	Modification of ELECTRICAL CHARACTERISTICS	
		p.2	Modification of h _{FE} CLASSIFICATION	
		p.4	Modification of method for obtaining S-parameters	

All trademarks and registered trademarks are the property of their respective owners.

Notice

- Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
- Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- Reness Electronics does not assume any liability for infragment of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renessa Electronics by a second s
- technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
- 4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
- 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

*Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment: and industrial robots etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.

Renease Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, millitary equipment etc.). You must check the quality grade of each Renease Electronics product before using it in a particular application. You may not use any Renease Electronics product for any application for which it is not intended. Renease Electronics multi any equipment etc.) use or third parties arising from the use of any Renease Electronics product for which the product is not intended by Renease Electronics.

- 6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
- 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
- 11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



SALES OFFICES

Refer to "http://www.renesas.com/" for the latest and detailed information

Renesas Electronics Corporation

http://www.renesas.com

California Eastern Laboratories, Inc.

4590 Patrick Henry Drive, Santa Clara, California 95054, U.S.A.

Tel: ±1-4008-919-2500, Fax: ±1-408-988-0279

Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K

Tel: ±44-1628-651-700, Fax: ±44-1628-651-804

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany

Tel: ±44-165030, Fax: ±49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Thi Floor, Quantum Plazar, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China

Tel: ±48-10-8235-1155, Fax: ±86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 204, 205, AZIA Center, No. 1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China

Tel: ±86-21-5877-1818, Fax: ±86-21-6887-7858

Renesas Electronics Hong Kong Limited

Unit 1001-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong

Tel: ±86-286-9316, Fax: ±852 286-9229044

Henesas Electronics Singapore Ple. Ltd.

80 Bendemer Road, Unit 800-0, Fax: ±852 288-9219, Gax

Tel: ±86-28175-9600, Fax: ±852-28175-9670

Renesas Electronics Singapore Ple. Ltd.

80 Bendemer Road, Unit 800-0, Fax: ±852-2863-286

80 Bendemer Road, Unit 800-02 Phylituk Innovation Ce

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Bipolar Transistors category:

Click to view products by Renesas manufacturer:

Other Similar products are found below :

MAPRST0912-50 MCH4016-TL-H MMBT5551-G PH3135-90S MRF10120 MRF587 15GN01CA-TB-E BFR 360L3 E6765 PH1214-100EL PH1214-25M 2SA1257-5-TB-E MAPRST0912-350 MCH4014-TL-H MMBTH10-TP BFP 420F H6327 BFP 620F H7764 BFP 640F H6327 BFP 720F H6327 BFP 740F H6327 BFR 340L3 E6327 BFR 360F H6765 BFR 740L3RH E6327 PH2729-25M MRF10031 NSVF4009SG4T1G DSC5G02D0L BFP 182R E7764 BFP405H6740XTSA1 MRF10350 MRF321 PH2729-65M MRF317 ASMA201 MCH4015-TL-H BF888H6327XTSA1 MMBT2222A-G BFP196WH6327XTSA1 BFP405FH6327XTSA1 BFP640ESDH6327XTSA1 BFR193L3E6327XTMA1 BFR505T,115 BFU550WX BFU550XRR BFU580QX 55GN01FA-TL-H NSVF4020SG4T1G NSVF6003SB6T1G MMBT5179 MS1406 STBV32-AP