

POWER SUPPLY TRANSFORMERS




These transformers enable the Carel IR32/IRDR controllers or Tempatron TT32/TTDR timers to be supplied from 110Vac or 240Vac. They provide a low cost solution for mains operated systems and with a 3VA rating are useful for driving other low voltage monitors, alarms or control circuits that require a 12V supply.

**SPECIFICATION**

- Input voltage: 110Vac or 240 VAC @ 50/60Hz
- Input range: +/- 10% of nominal
- Output voltage: 12Vac
- Regulation: 13.8Vac (0mA), 10Vac (300mA)
- Max output: 3VA
- Weight: 200 gms

**DIMENSIONS**

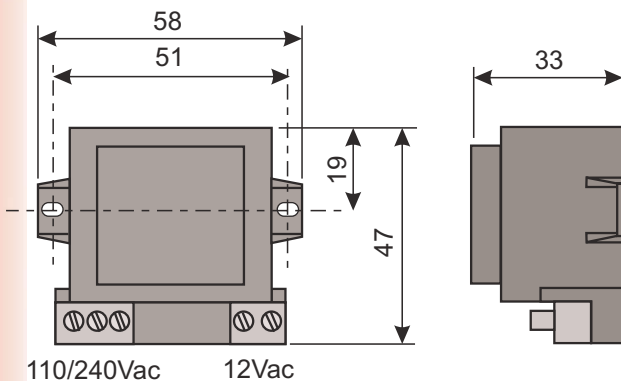

STANDARD ITEMS

Supply	Output	Part Number
240Vac	12Vac	TRA12UN100
110Vac	12Vac	TRA12UN111

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [carel](#) manufacturer:*

Other Similar products are found below :

[TRA12UN100](#) [PTC0150000](#) [IR33Z9MR20](#) [IR33V7LR20](#) [NTC015WH01](#)