

LTC3789EGN
High Efficiency
12V/12A Buck-Boost Converter

DESCRIPTION

Demonstration circuit 1757A is a high efficiency synchronous buck-boost DC/DC converter with a 6V to 36V input voltage range. It can supply a 12A maximum load current with a 12V output. The demo board features the LTC®3789EGN controller. The constant frequency current mode architecture allows a phase-lockable frequency of up to 600kHz, while an optional output current feedback loop provides support for applications such as battery charging. With a wide input range, wide output range and seamless transfers between operation modes, the LTC3789 is ideal for automotive, telecom, distributed DC power systems and battery-powered applications.

The light load operation mode of the converter is determined with the MODE/PLLIN pin. Use JP2 jumper to select pulse-skipping mode or forced continuous mode (CCM) operation. The switching frequency is pre-set at about 200kHz. The converter can also be externally synchronized to an external clock through the MODE/PLLIN pin (PLLIN terminal on the board). To shut down the converter, force the RUN pin below 1.2V (JP1: OFF). The power good output (PGOOD terminal) is low when the output voltage is outside of the $\pm 10\%$ regulation window.

Design files for this circuit board are available at
<http://www.linear.com/demo>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY (T_A = 25°C)

| PARAMETER | CONDITIONS | VALUE |
|--|---|----------------------|
| Input Voltage Range | | 6V to 36V |
| Output Voltage, V _{OUT} | V _{IN} = 6V to 36V, I _{OUT} = 0A to 12A | 12V $\pm 2\%$ |
| Maximum Output Current, I _{OUT} | V _{IN} = 6V to 36V, V _{OUT} = 12V | 12A |
| Typical Output Ripple | V _{IN} = 36V, I _{OUT} = 12A (20MHz BW) | 109mV _{P-P} |
| Typical Efficiency | V _{IN} = 12V, V _{OUT} = 12V, I _{OUT} = 12A | 97.9% |
| Typical Switching Frequency | | 200kHz |

QUICK START PROCEDURE

Demonstration circuit 1757A is easy to set up to evaluate the performance of the LTC3789. Refer to Figure 1 for the proper measurement equipment setup and follow the procedure below:

1. With power off, connect the input power supply to V_{IN} (6V to 36V) and GND (input return).
2. Connect the 12V output load between V_{OUT} and GND (Initial load: no load).

3. Connect the DVMs to the input and outputs.
4. Turn on the input power supply and check for the proper output voltages. V_{OUT} should be 12V $\pm 2\%$.
5. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage and other parameters.

DEMO MANUAL DC1757A

QUICK START PROCEDURE

Note: When measuring the output or input voltage ripple, do not use the long ground lead on the oscilloscope probe. See Figure 2 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (-) terminals of an output capacitor. The probe's ground ring needs to touch the (-) lead and the probe tip needs to touch the (+) lead.

Additional Notes:

1. On DC1757 board, two Coilcraft XAL1010 inductors are used in series instead of one larger inductor, for optimal size and performance. You may use a single inductor, such as Coilcraft SER2915L-332KL, if that is preferred.
2. Usually, the worst case efficiency at full load is at V_{IN} . The board can deliver more output power at higher V_{IN} .
3. R2 is needed for additional/constant output current limit only.

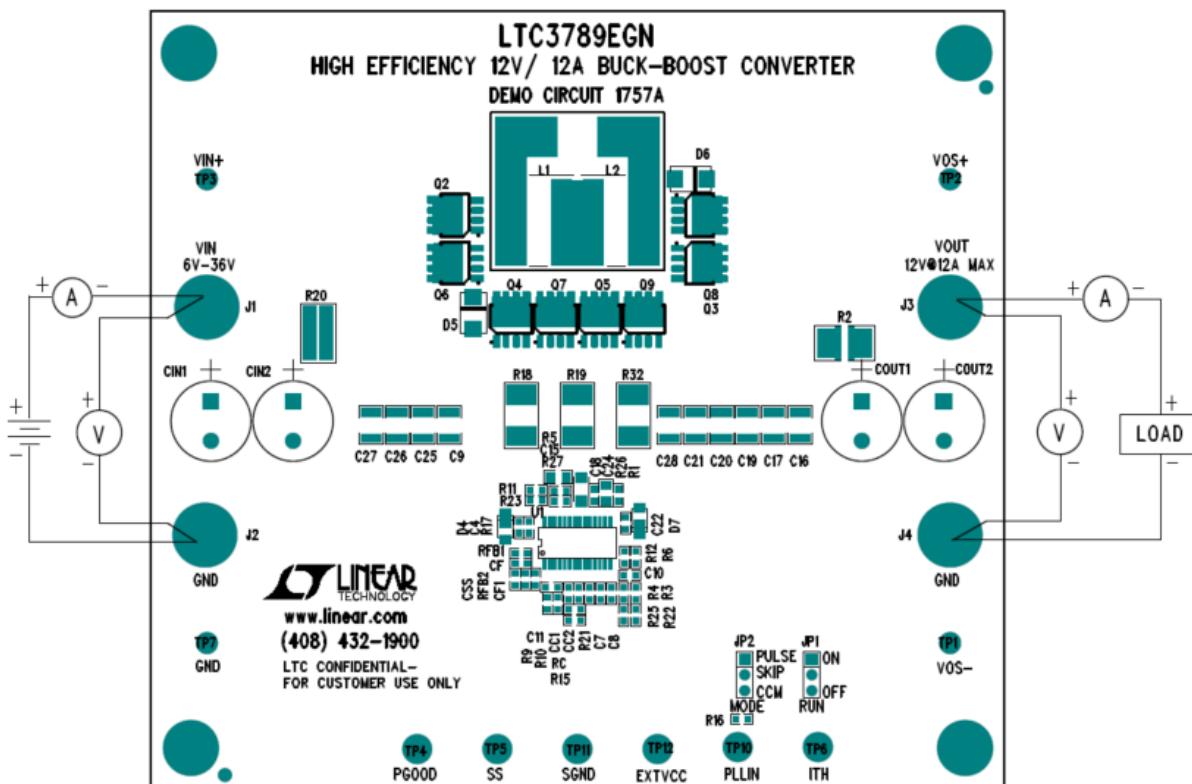


Figure 1. Proper Measurement Equipment Setup

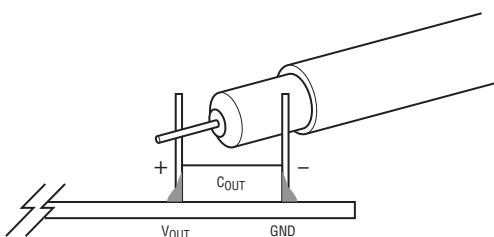
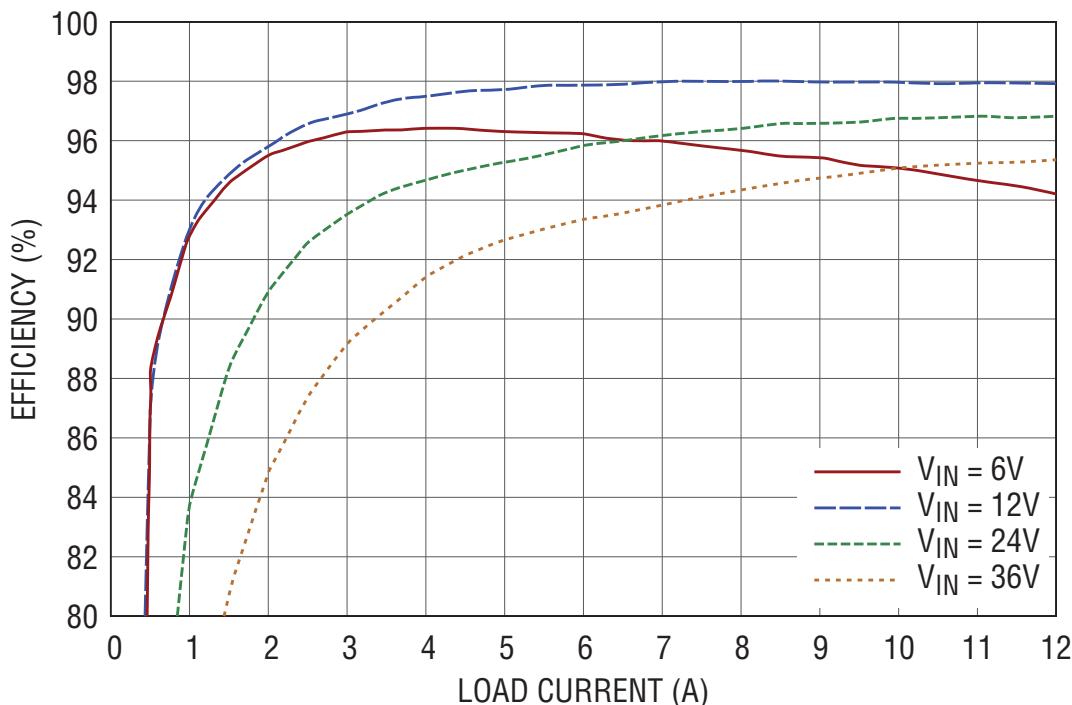


Figure 2. Measuring Output Voltage Ripple

QUICK START PROCEDURE

Figure 3. Efficiency vs load current ($V_0 = 12V$, CCM)

PARTS LIST

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|------------------------------------|-----|------------------------|------------------------------------|------------------------------|
| Required Circuit Components | | | | |
| 1 | 1 | CC1 | CAP., COG, 100pF, 50V, 10% 0603 | AVX, 06035A101KAT2A |
| 2 | 1 | CC2 | CAP., X7R, 0.01μF, 50V, 10% 0603 | AVX, 06035C103KAT2A |
| 3 | 2 | CSS, C15 | CAP., X7R, 0.1μF, 50V, 10% 0603 | AVX, 06035C104KAT2A |
| 4 | 1 | C11 | CAP., NPO, 68pF, 50V, 10% 0603 | AVX, 06035A680KAT2A |
| 5 | 1 | C10 | CAP., X5R, 2.2μF, 10V, 10% 0603 | AVX, 0603ZD225KAT2A |
| 6 | 1 | C24 | CAP., X7R, 1μF, 16V, 20% 0603 | AVX, 0603YC105MAT2A |
| 7 | 2 | CIN1, CIN2 | CAP., Alum, 270μF, 50V, 20% | SUN Electronics, 50ME270WX+T |
| 8 | 2 | COUT1, COUT2 | CAP., OS-CON, 330μF, 16V, 20% | SANYO, 16SEP330M+T |
| 9 | 6 | C16, C17, C19-C21, C28 | CAP., X7R, 22μF, 16V, 20% 1210 | AVX, 1210YC226MAT2A |
| 10 | 2 | C4, C22 | CAP., X7R, 0.22μF, 16V, 20% 0603 | AVX, 0603YC224MAT2A |
| 11 | 5 | C9, C14, C25-C27 | CAP., X7R, 3.3μF, 50V, 20% 1210 | AVX, 12105C335MAT2A |
| 12 | 1 | C18 | CAP., X5R, 10μF, 6.3V, 20% 1206 | AVX, 12066D106MAT2A |
| 13 | 2 | D4, D7 | DIODE, SCHOTTKY 1A, 60V POWERDI123 | DIODE INC., DFLS160-7 |
| 14 | 2 | D5, D6 | DIODE, SCHOTTKY 3A, 40V SMA | DIODE INC., B340A-13-F |
| 15 | 1 | D8 | DIODE, ZENER 5.1V 350MW SOT23-3 | DIODE INC., BZX84C5V1-7-F |

DEMO MANUAL DC1757A

PARTS LIST

| | | | | |
|----|---|-----------------------------|-----------------------------------|------------------------------|
| 16 | 2 | L1, L2 | Inductor, 1.5µH | COILCRAFT, XAL1010-152ME |
| 17 | 3 | Q2, Q4, Q6 | Mosfet N-channel | INFINEON, BSC027N04LS G |
| 18 | 3 | Q3, Q5, Q9 | Mosfet N-channel | INFINEON, BSC010NE2LS |
| 19 | 1 | RFB1 | RES., CHIP, 113k, 0.1W, 1% 0603 | YAGEO, RC0603FR-07113KL |
| 20 | 1 | RFB2 | RES., CHIP, 8.06k, 0.1W, 1% 0603 | YAGEO, RC0603FR-078K06L |
| 21 | 3 | R18, R19, R32 | Sensor Res., 0.01, 1W, 1% 2512 | VISHAY, WSL2512R0100FEA |
| 22 | 1 | R2 | Sense RES 0.003Ω, 1W, 1% 2512 SMD | YAGEO, PR2512FKF070R003L |
| 23 | 6 | R3, R4, R9, R10, R13, R14 | RES., CHIP, 100, 0.1W, 1% 0603 | YAGEO, RC0603FR-07100RL |
| 24 | 1 | R5 | RES., CHIP, 5.1, 0.1W, 5% 0805 | YAGEO, RC0805JR-075R1L |
| 25 | 1 | R7 | RES., CHIP, 100k, 0.1W, 1% 0603 | YAGEO, RC0603FR-07100KL |
| 26 | 1 | R8 | RES., CHIP, 10, 0.1W, 5% 0603 | YAGEO, RC0603JR-0710RL |
| 27 | 1 | R26 | RES., CHIP, 10, 0.1W, 5% 0805 | YAGEO, RC0805JR-0710RL |
| 28 | 6 | R1, R11, R17, R23, R25, R27 | RES., CHIP, 0.1% 0603 | YAGEO, RC0603FR-070RL |
| 29 | 1 | R20 | RES., CHIP, 0.2512 | TEPRO, RN5326 |
| 30 | 1 | R16 | RES., CHIP, 1k, 0.1W, 1% 0603 | YAGEO, RC0603FR-071KL |
| 31 | 3 | RC, R21, R24 | RES., CHIP, 10k, 0.1W, 1% 0603 | YAGEO, RC0603FR-0710KL |
| 32 | 1 | R30 | RES., CHIP, 33.2k, 0.1W, 1% 0603 | YAGEO, RC0603FR-0733K2L |
| 33 | 1 | R31 | RES., CHIP, 12.1k, 0.1W, 1% 0603 | YAGEO, RC0603FR-0712K1L |
| 34 | 1 | U1 | I.C., Volt. Reg. | Linear Tech., LTC3789EGN#PBF |

Additional Demo Board Circuit Components:


| | | | | |
|---|---|-------------------------|------------------|--|
| 1 | 0 | CF1, CF, C7, C8 (OPT) | CAP, 0603 | |
| 2 | 0 | C23, C29-C32, C35 (OPT) | CAP, 1210 | |
| 3 | 0 | C12, C13 (OPT) | CAP, 1206 | |
| 4 | 0 | Q7, Q8 (OPT) | Mosfet | |
| 5 | 0 | R6, R12, R15, R22 (OPT) | RES., 0603 | |
| 6 | 0 | R28, R29 (OPT) | RES., CHIP, 1206 | |

Hardware-For Demo Board Only

| | | | | |
|---|---|--------------------------|---------------------------------|-----------------------------------|
| 1 | 2 | JP1, JP2 | HEADER, 3 PIN, 0.079 SINGLE ROW | SAMTEC, TMM-103-02-L-S |
| 2 | 2 | XJP1, XJP2B | SHUNT, .079" CENTER | SAMTEC, 2SN-BK-G |
| 3 | 4 | J1, J2, J3, J4 | Connector, Banana Jack | Keystone, 575-4 |
| 4 | 4 | TP1, TP2, TP3, TP7 | TESTPOINT, TURRET, .061" pbf | MILL-MAX, 2308-2-00-80-00-00-07-0 |
| 5 | 6 | TP4, TP5, TP6, TP10-TP12 | TESTPOINT, TURRET, .094" pbf | MILL-MAX, 2501-2-00-80-00-00-07-0 |
| 6 | 4 | MTGS AT 4 CORNERS | STAND-OFF, NYLON 0.5" | KEYSTONE, 8833(SNAP ON) |

DEMO MANUAL DC1757A

SCHEMATIC DIAGRAM

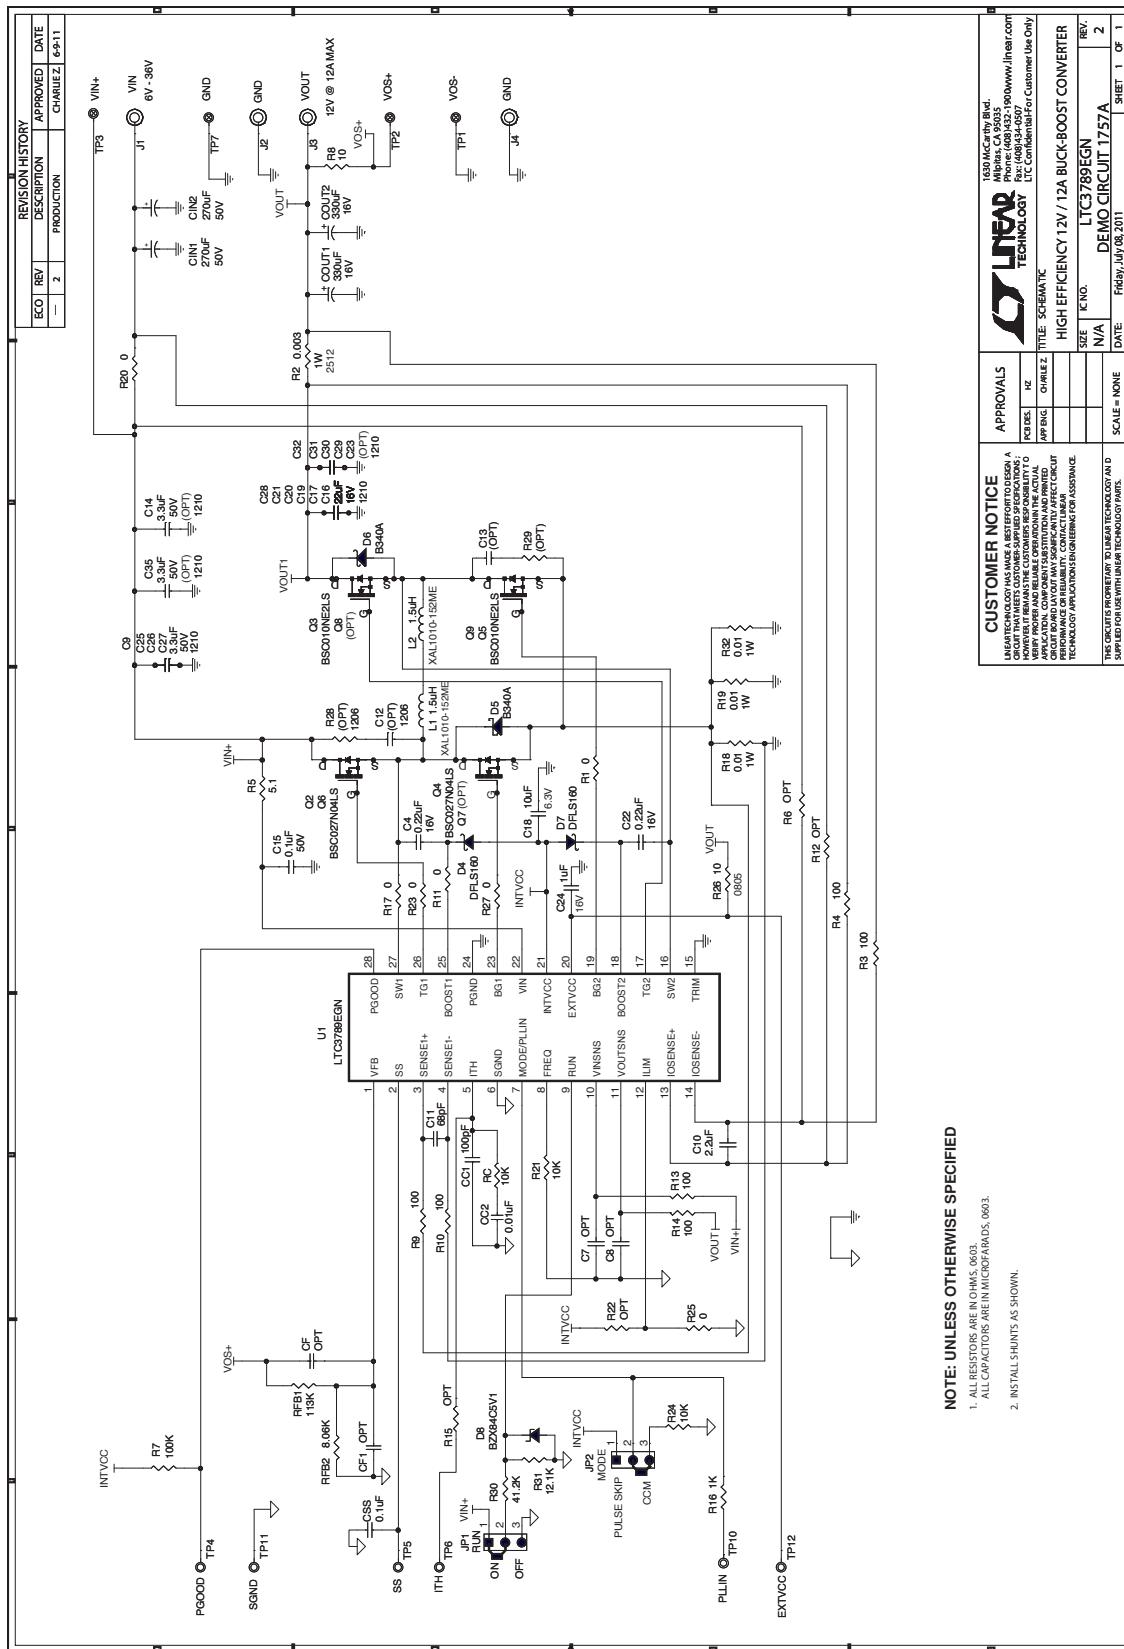

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

DEMO MANUAL DC1757A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No license is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

dc1757af

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for linear technology manufacturer:

Other Similar products are found below :

[LTC1503CS8-1.8](#) [LTC1622CMS8](#) [LTC1740CG](#) [LT1073CN8-5#PBF](#) [LT1342CG](#) [LT1376HVIS](#) [LT1491A](#) [LT1576CS8](#) [LTC1338CG](#)
[LTC1592BCG](#) [LTC1595BCN8](#) [LTC1698ES](#) [LTC2442CGPBF](#) [LT1021DCN8-5#PBF](#) [LT1079CN#PBF](#) [LT1674CN](#) [LT3023EDD](#)
[LT1076HVCT7#PBF](#) [LT1101CN8#PBF](#) [LT1168CS8#PBF](#) [LT1171CQ#PBF](#) [LT1210CT7#PBF](#) [LT1308BCS8#PBF](#) [LT1913EDD#PBF](#)
[LT1172CT#PBF](#) [LT3473EDD#PBF](#) [LT1376IS8-5#PBF](#) [LT1720CS8#PBF](#) [LT1785AIS8#PBF](#) [LT1944EMS#PBF](#) [LT3435EFE#PBF](#)
[DC993A](#) [DC987B-E](#) [DC985A-A/B](#) [DC956A](#) [DC951A](#) [DC936A](#) [DC918C-E](#) [DC917A](#) [DC906A](#) [DC903A-B](#) [DC895A-C](#) [DC817A](#) [DC809A](#)
[DC790A](#) [DC773A](#) [DC770C](#) [DC768A](#) [DC761A-A](#) [DC745A](#)