


UW-MDN is RFID reader module working on the principle of contactless reading data from Mifare transponder (ISO 14443-3).

Mifare transponder has 32-bit identification number stored in it ( ID numbers are different for each transponder). Reader sends this number via 1-wire Bus in format DS1990. Only READ\_ROM 1-wire command are supported.


### **Technical Data**

Supply voltage	7...16V
Supply current	30...100 mA
RF module working frequency	13,56 MHz
Red led voltage	0...9V
Max. Read distance	6 cm (MAX.)
Antenna	Build into device
Transmission	1-wire (dallas)
Dimensions	82 x 82 x 22 mm
Distance between screws	42 mm

### **Connections**

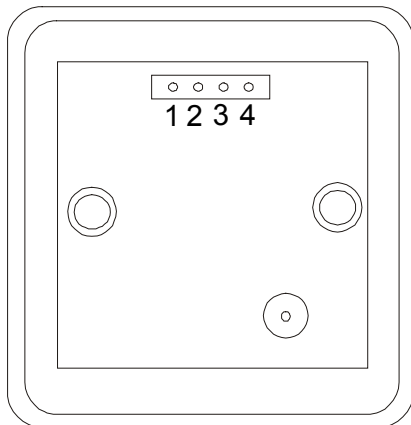

Back view

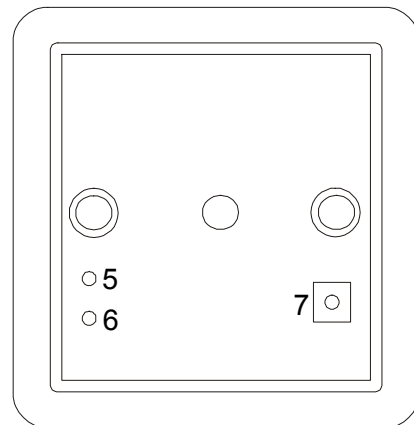

Front view

item	description
1	Supply voltage
2	Ground
3	1-wire (output of data)
4	Red LED input
5	Red LED
6	Green LED (supply power)
7	Button (pull down of data bus)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Modules](#) category:*

*Click to view products by [Netronix](#) manufacturer:*

Other Similar products are found below :

[HMC-C009](#) [nRF24L01P-MODULE-PCB](#) [HMC-C001](#) [HMC-C021](#) [HMC-C024](#) [XB9XT-DPRS-721](#) [XBP24BZ7PIT-004J](#) [XBP9B-DMUTB022](#) [nRF24L01P-MODULE-SMA](#) [CMD-KEY2-418-CRE](#) [XM-C92-2P-UA](#) [XB9XT-DPUS-721](#) [V640-A90](#) [HMC-C583](#) [MAAM-008818-TR3000](#) [MTSMC-H5-U](#) [SIMSA868-PRO](#) [SIMSA915C-PRO](#) [SIMSA868C-PRO](#) [SIMSA433C-PRO](#) [SIMSA915-PRO](#) [XBP9B-DMUT-042](#) [HMC-C582](#) [HMC-C022](#) [XBP9B-DPST-041](#) [XBP9B-DMWT-042](#) [SM-MN-00-HF-RC](#) [HMC-C031](#) [MT-02](#) [M1002GB](#) [702-W](#) [SIMSA868C-N-PRO](#) [SIMSA433C-N-PRO](#) [SIMSA915C-N-PRO](#) [PEPPER WIRELESS C1 USB](#) [S2-1050J-Z0K4J](#) [S2-10732-Z1T61](#) [S2-10716-Z1W4E](#) [S2-107ET-Z1W6D](#) [S2-10686-Z1L1D](#) [S2-10688-Z1L1T](#) [S2-106BA-Z1P20](#) [UC15EA-MINIPCIE](#) [SU60-2230C-PU](#) [RC-TFSK3-868](#) [NANO RFID POE](#) [650201424G](#) [H330 A30-00](#) [CMD-HHCP-433-MD](#) [RC-CC1101-SPI-868](#)