


Amorphous Power Inductor

- For smoothing switching power supply output
- Rated Current: 30ADC
- Low core-loss at high frequency

Amorphous iron cores with precised gap are used in the coil


Schematic Diagram;





ODEL NUMBER

Mechanical Specifications;

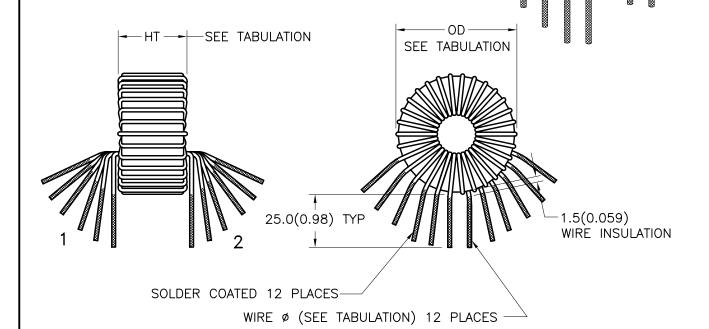

Part Number	Rated Current (ADC)	Inductance (uH)±25%	DCR (mΩ) MAX	Wire Dia (ømm)	Dimension OD mm(In) MAX	Dimension HT mm(In) MAX
NAC-30-0011	30	10	3	1.0X6	34(1.34)	20(0.79)
NAC-30-0021	30	20	4	1.1X6	43(1.69)	21(0.83)
NAC-30-0031	30	30	4	1.1X6	44(1.73)	23(0.91)
NAC-30-0051	30	50	6	1.1X6	56(2.20)	27(1.06)
NAC-30-0101	30	100	7	1.1X6	57(2.24)	35(1.38)

PREPARED BY:

NOTE: Inductance is measured at 20 KHz with specified DC current K. BRENNAN

ENGINEER: M. PITCHAI QUALITY CONTROL: DWG CONTROL NO. P-A4-13612 ACAD\MXFMR\A4136121.DWG

30A POWER INDUCTOR FOR SWITCH MODE POWER SUPPLIES

NAC-30 SERIES MODEL SPECIFICATION

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (951) 699-1270 FAX 9516769482

DIM: mm(In) SCL: 1/1

APPROVED:

T. CLEM

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING. Y. SEKIGUCHI

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by Tamura manufacturer:

Other Similar products are found below:

MLZ1608M6R8WTD25 MLZ1608N6R8LT000 MLZ1608N3R3LTD25 MLZ1608N3R3LTD00 MLZ1608N150LT000 MLZ1608N150WTD00 MLZ1608M150WTD00 MLZ1608M1SWTD00 MLZ1608M1SWTD00 MLZ1608N1R5WTD00 MLZ1608N1R5WTD00 MLZ1608N1R5WTD00 MLZ1608N1R5WTD00 B82432C1333K000 PCMB053T-1R0MS PCMB053T-1R5MS PCMB104T-1R5MS CR32NP-100KC CR32NP-151KC CR32NP-180KC CR32NP-181KC CR32NP-180KC CR32NP-181KC CR32NP-390KC CR32NP-390KC CR32NP-389MC CR32NP-680KC CR32NP-820KC CR32NP-8R2MC CR43NP-390KC CR43NP-560KC CR43NP-680KC CR54NP-181KC CR54NP-470LC CR54NP-820KC CR54NP-8R5MC MGDQ4-00004-P MGDU1-00016-P MHL1ECTTP18NJ MHL1JCTTD12NJ PE-51506NL PE-53601NL PE-53630NL PE-53824SNLT PE-62892NL PE-92100NL PG0434.801NLT PG0936.113NLT PM06-2N7 PM06-39NJ HC2LP-R47-R HC3-2R2-R HC8-1R2-R