

DK86065-2

May 2011
Version 2.2

14-bit 1+GSa/s DAC Development Kit

FME/MS/DAC80S/FL_2/5488

The DK86065-2 development kit provides a simple and effective means of evaluating the MB86065 14-bit 1+GSa/s Digital to Analog Converter (DAC).



A user manual provides a step-by-step guide from configuring the board and connecting test equipment, through to evaluating performance of the MB86065. Schematics, PCB overlays and connector pin-outs are included. The evaluation platform requires two DC power supplies, 1.8V & 3.3V, each capable of providing 1 amp. The PC USB programming cable included combined with the control software available for free download supports configuration and control of the device, as well as downloading test vectors to the waveform memory module.

Features

- Development kit for MB86065
 - MB86065 Evaluation Board
 - PC USB Programming Cable
 - PC control software available for free download
 - User Manual
- SMA data adaptors (optional)
- Xilinx® Virtex® 5 FPGA Platform Adaptor (optional)

Applications

- Provides easy access to on-chip waveform memories to perform initial performance tests, avoiding need for high performance data generating equipment.

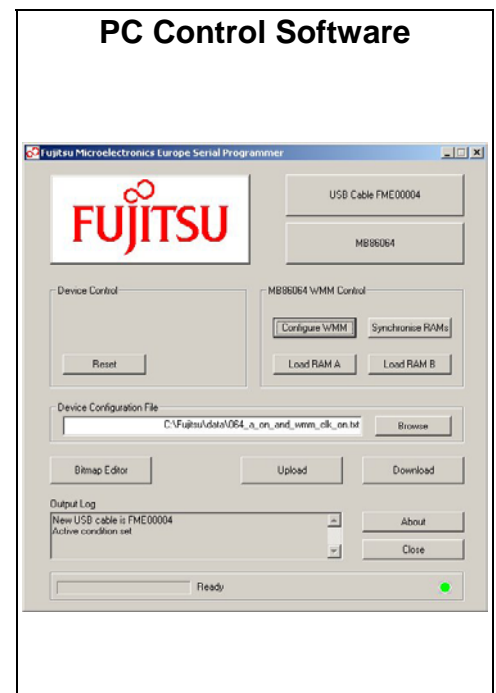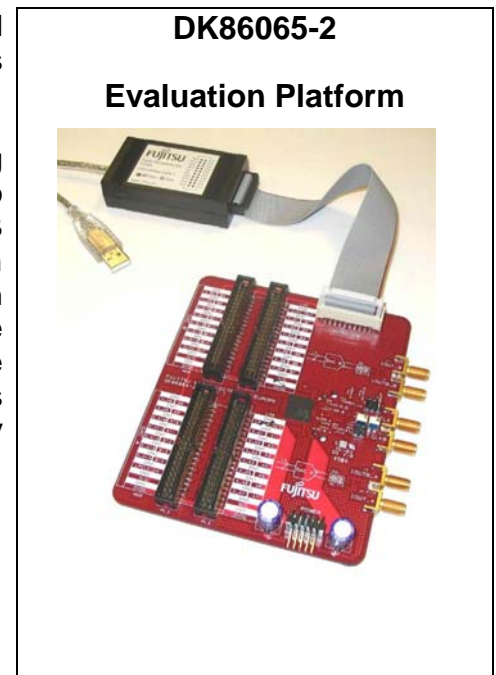

DK86065-2 14-bit 1+GSa/s DAC Development Kit

Essential Equipment

Apart from the power supplies, the minimum equipment vital to conducting an evaluation of the MB86065 is a high quality RF clock and spectrum analyser. The phase & spurious performance of the clock should be such as to not limit the DAC performance (e.g. HP8664A). However, performance of even the best spectrum analysers available is inferior to that of the converter. To overcome this, filtering techniques and careful attention to analyser settings, e.g. RF Attenuation, is essential during the course of the evaluation.

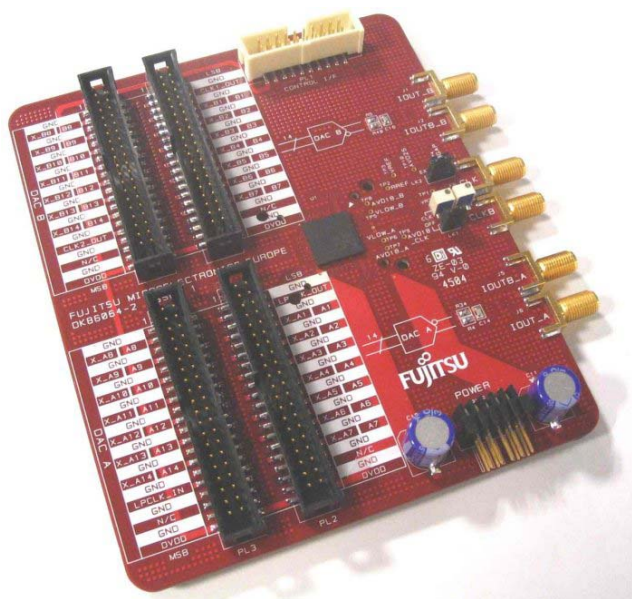


Figure 1. DK86065-2 Evaluation Board

Driving the DAC

As with any DAC evaluation an appropriate test vector stimulus is required. Unfortunately at data rates above 300MSa/s this requires digital pattern generation capabilities beyond most standard test equipment. The DK86065-2 Development Kit has been designed to help overcome this difficulty in a number of ways. Initially, unmodulated or pseudo-modulated single and multi-tone/carrier tests can be conducted using waveforms downloaded to the on-chip memories.

Test waveforms are easily loaded into the memories using the PC software and USB

programming cable supplied. Even if high speed digital pattern generating equipment is available, initial testing using the waveform memories serves as a useful setup check.

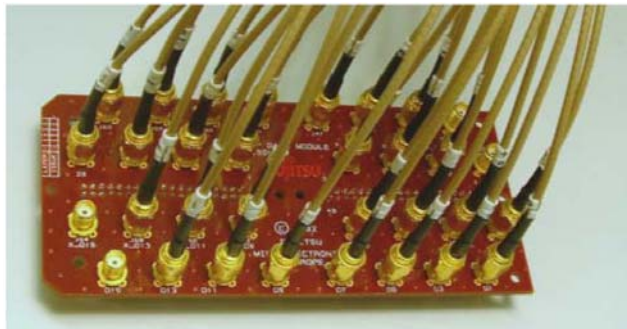


Figure 2. Optional SMA Adaptor

Pattern generators can be connected to the evaluation board using either the onboard 2-row 0.1" data headers, or via ribbon cables to the optional SMA adaptors. When using the 0.1" data headers it is assumed that a custom wiring harness will be required. This would be made according to the connector type and pinout of the generator's output. The optional SMA adaptors provide a convenient conversion from SMA to the evaluation board's 0.1" headers. This alleviates the simultaneous removal of 28 SMAs (14-bit differential LVDS) when required to be disconnected. One advantage of this is the ability to easily swap the data generator between DAC data ports if insufficient channels are available to drive both ports simultaneously.

Rather than using general purpose test equipment, customers may wish to use the evaluation board to construct a platform more representative of their end application. This might, for example, involve an FPGA to implement a variety of pre-processing and/or waveform generation functions. At the simplest level, a setup similar to that described for the digital pattern generator could be used, where a custom wiring harness interfaces a standard or existing FPGA platform to the DAC evaluation board. An optional adaptor is available for direct connection to a Xilinx® Virtex® 5 platform. Control of the DAC from the PC software can be maintained to minimise effort to get up and running.

DK86065-2 14-bit 1+GSa/s DAC Development Kit



Figure 3. Optional Virtex® 5 Adaptor

Clock Inputs & Analog Outputs

The evaluation board is designed to accommodate up to four SMA connectors - two for the differential clock input and two for the differential analog output. Boards are supplied with transformers on-board to perform single ended-to-differential and differential-to-single ended conversions. As such, only two SMAs are required. This facilitates easier connection to standard test equipment.

PC Control & Software

The development kit includes a PC USB programming cable which interfaces between a host PC USB port and the DAC's 4-wire serial interface.



Figure 4. PC USB Interface Adaptor

The latest PC software can be downloaded, following registration, from the Data Converters 'Datasheet & Application Notes' area of the EMEA website.

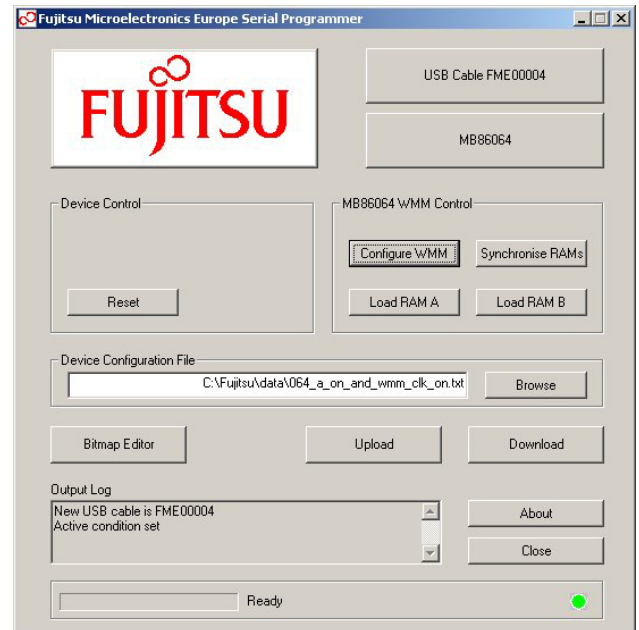


Figure 5. PC Software User Interface

Ordering Information

Part	Order Reference
Complete Development Kit (includes Evaluation Board with device fitted, PC USB Programming Cable & User Manual)	DK86065-2
DAC DK FPGA Adaptor (optional)	DKXC5VADAPT-1
SMA Adaptors (optional)	DK86064-1-SMA
DK86065-2 User Manual	Contact Fujitsu
MB86065 Data sheet	emea.fujitsu.com/semiconductor

Worldwide Headquarters

Japan

Tel: +81 45 473 8030 **Fujitsu Semiconductor Limited**
Nomura Fudosan Shin-Yokohama Building
2-10-23 Shin-Yokohama, Kohoku-ku,
Yokohama
Kanagawa 222-8508
Japan

<http://www.fujitsu.com/global/services/microelectronics>

Asia

Tel: +65 281 0770 **Fujitsu Semiconductor Asia Pte Ltd**
Fax: +65 281 0220
151 Lorong Chuan
New Tech Park
#05-08
Singapore 556741

<http://sg.fujitsu.com/semiconductor>

Korea

Tel: +82 2 3484 7108 **Fujitsu Semiconductor Korea Limited**
Fax: +82 2 3484 7111
2nd Floor, Kosmo Tower Building
1002 Daechi-Dong
Kangnam-Gu
Seoul
Korea

<http://www.fujitsu.com/kr/fmk/>

China

Tel: +86-21 6416 3688 **Fujitsu Semiconductor (Shanghai) Ltd**
Fax: +86-21 6335 1615
Room 3102-3103 Bund Center
222 Yan An Rd (E)
Shanghai 200002
PRC

<http://sg.fujitsu.com/semiconductor>

USA

Tel: +1 408 737 5600 **Fujitsu Semiconductor America, Inc.**
Fax: +1 408 737 5999
1250 E. Arques Avenue, M/S 333
Sunnyvale, CA 94088-3470
USA

Tel: +1 800 866 8608 Customer Response Center
Fax: +1 408 737 5984 Mon-Fri: 7am-5pm (PST)

Europe

Tel: +49 6103 6900 **Fujitsu Semiconductor Europe GmbH**
Fax: +49 6103 690122
Pittlerstrasse 47
63225 Langen
Germany

<http://www.fujitsu.com/us/services/edevice/microelectronics/> <http://emea.fujitsu.com/semiconductor>

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU SEMICONDUCTOR sales representatives before ordering.

The information and circuit diagrams in this document presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU SEMICONDUCTOR is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams. No license is granted by implication or otherwise under any patent or patent rights of Fujitsu Semiconductor Europe GmbH.

FUJITSU SEMICONDUCTOR devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

CAUTION: Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU SEMICONDUCTOR sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have inherently a certain rate of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Control Law of Japan, the prior authorization by Japanese government should be required for export of those products from Japan.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Data Conversion IC Development Tools](#) category:

Click to view products by [Fujitsu](#) manufacturer:

Other Similar products are found below :

[EV-AD5443/46/53SDZ](#) [EVAL-AD5063EBZ](#) [EVAL-AD5064EBZ](#) [EVAL-AD5361EBZ](#) [EVAL-AD5363EBZ](#) [EVAL-AD5373EBZ](#) [EVAL-AD5422LFEBZ](#) [EVAL-AD5629RSDZ](#) [EVAL-AD5755-1SDZ](#) [EVAL-AD5821AEBZ](#) [EVAL-AD7175-8SDZ](#) [EVAL-AD7262EDZ](#) [EVAL-AD7265EDZ](#) [EVAL-AD7366SDZ](#) [EVAL-AD7634EDZ](#) [EVAL-AD7641EDZ](#) [EVAL-AD7655EDZ](#) [EVAL-AD7674EDZ](#) [EVAL-AD7705EBZ](#) [EVAL-AD7718EBZ](#) [EVAL-AD7719EBZ](#) [EVAL-AD7730LEBZ](#) [EVAL-AD774142EBZ](#) [EVAL-AD7767-1EDZ](#) [EVAL-AD7873EBZ](#) [EVAL-AD7877EBZ](#) [EVAL-AD7995EBZ](#) [AD9114-DPG2-EBZ](#) [AD9122-M5372-EBZ](#) [AD9125-M5372-EBZ](#) [AD9148-EBZ](#) [AD9211-200EBZ](#) [AD9211-300EBZ](#) [AD9219-65EBZ](#) [AD9228-65EBZ](#) [AD9230-170EBZ](#) [AD9251-20EBZ](#) [AD9251-65EBZ](#) [AD9255-105EBZ](#) [AD9255-125EBZ](#) [AD9284-250EBZ](#) [AD9286-500EBZ](#) [AD9613-170EBZ](#) [AD9627-125EBZ](#) [AD9629-20EBZ](#) [AD9709-EBZ](#) [AD9716-DPG2-EBZ](#) [AD9737A-EBZ](#) [AD9739A-EBZ](#) [AD9740ACP-PCBZ](#)