

# High frequency amplifier transistor, RF switching (6V, 50mA)

# 2SC4774 / 2SC4713K

#### Features

- 1) Very low output-on resistance (Ron).
- 2) Low capacitance.

## ●Absolute maximum ratings (Ta=25°C)


Parameter	Symbol	Limits	Unit
Collector-base voltage	Vсво	12	V
Collector-emitter voltage	Vceo	6	V
Emitter-base voltage	VEBO	3	V
Collector current	lc	50	mA
Collector power dissipation	Pc	0.2	W
Junction temperature	Tj	150	°C
Storage temperature	Tstg	-55 to +150	°C

#### ●Packaging specifications and hFE

Туре	2SC4774	2SC4713K	
Package	UMT3	SMT3	
hfE	S	S	
Marking	BM*	BM∗	
Code	T106	T146	
Basic ordering unit (pieces)	3000	3000	

<sup>\*</sup>Denotes hre

### ●Dimensions (Unit: mm)

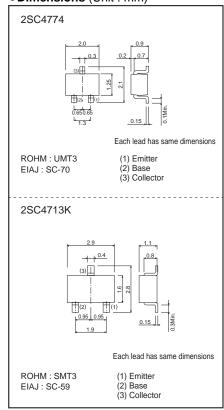

## ●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Collector-base breakdown voltage	ВУсво	12	-	-	V	Ic=10μA
Collector-emitter breakdown voltage	BVceo	6	-	-	V	Ic=1mA
Emitter-base breakdown voltage	ВУЕВО	3	-	-	V	Iε=10μA
Collector cutoff current	Ісво	-	-	0.5	μА	VcB=10V
Emitter cutoff current	Ієво	-	-	0.5	μА	V <sub>EB</sub> =2V
Collector-emitter saturation voltage	VCE(sat)	-	-	0.3	V	Ic/I <sub>B</sub> =10mA/1mA
DC current transfer ratio	hfe	180	-	560	-	VcE/Ic=5V/5mA
Transition frequency	f⊤	300	800	-	MHz	Vc=5V, I=-10mA, f=200MHz
Output capacitance	Cob	-	1	1.7	pF	Vcb=10V, IE=0A, f=1MHz
Output-on resistance	Ron	-	2	-	Ω	I <sub>B</sub> =3mA, V <sub>I</sub> =100mVrms, f=500kHz

This product might cause chip aging and breakdown under the large electrified environment. Please consider to design ESD protection circuit.

2SC4774 / 2SC4713K Data Sheet

#### •Electrical characteristic curves




Fig.1 Grounded emitter output characteristics ( I )




Fig.2 Grounded emitter output characteristics ( II )




Fig.3 Grounded emitter propagation characteristics




Fig.4 DC current gain vs. collector current




Fig.5 Collector-emitter saturation voltage vs. collector current




Fig.6 Gain bandwidth product vs. collector current




Fig.7 Collector output capacitance vs. voltage




Fig.8 Back capacitance voltage




Fig.9 Output-on resistance vs. base current

#### Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact us.

# **ROHM Customer Support System**

http://www.rohm.com/contact/

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Bipolar Transistors category:

Click to view products by ROHM manufacturer:

Other Similar products are found below:

MAPRST0912-50 MCH4016-TL-H MMBT5551-G PH3135-90S MRF10120 MRF587 15GN01CA-TB-E BFR 360L3 E6765 PH1214100EL PH1214-25M 2SA1257-5-TB-E MAPRST0912-350 MCH4014-TL-H MMBTH10-TP BFP 420F H6327 BFP 620F H7764 BFP 640F
H6327 BFP 720F H6327 BFP 740F H6327 BFR 340L3 E6327 BFR 360F H6765 BFR 740L3RH E6327 PH2729-25M MRF10031
NSVF4009SG4T1G DSC5G02D0L BFP 182R E7764 BFP405H6740XTSA1 MRF10350 MRF321 PH2729-65M MRF317 ASMA201
MCH4015-TL-H BF888H6327XTSA1 MMBT2222A-G BFP196WH6327XTSA1 BFP405FH6327XTSA1 BFP640ESDH6327XTSA1
BFR505T,115 BFU550WX BFU550XRR BFU580QX MRF10150 55GN01FA-TL-H NSVF4020SG4T1G NSVF6003SB6T1G MMBT5179
MS1406 STBV32-AP