5SDD 08D5000

Old part no. DV 827-800-50

Rectifier Diode

Properties

- low forward voltage drop
- low recovery charge
- high operating temperature
- low leakage current

Applications

- Rectifier bridges

Key Parameters

V_{RRM}	=	5 000	V
I_{FAVm}	=	1 028	A
I_{FSM}	=	12 000	A
V_{TO}	=	0.894	V
r_T	=	0.487	mΩ

Types

	V_{RRM}
5SDD 08D5000	**5 000 V**
Conditions:	T_j = -40 ÷ 160 °C, half sine waveform, f = 50 Hz

Mechanical Data

F_m	**Mounting force**	**10 ± 2 kN**
m	**Weight**	**0.27 kg**
D_S	**Surface creepage distance**	**30 mm**
D_a	**Air strike distance**	**20 mm**

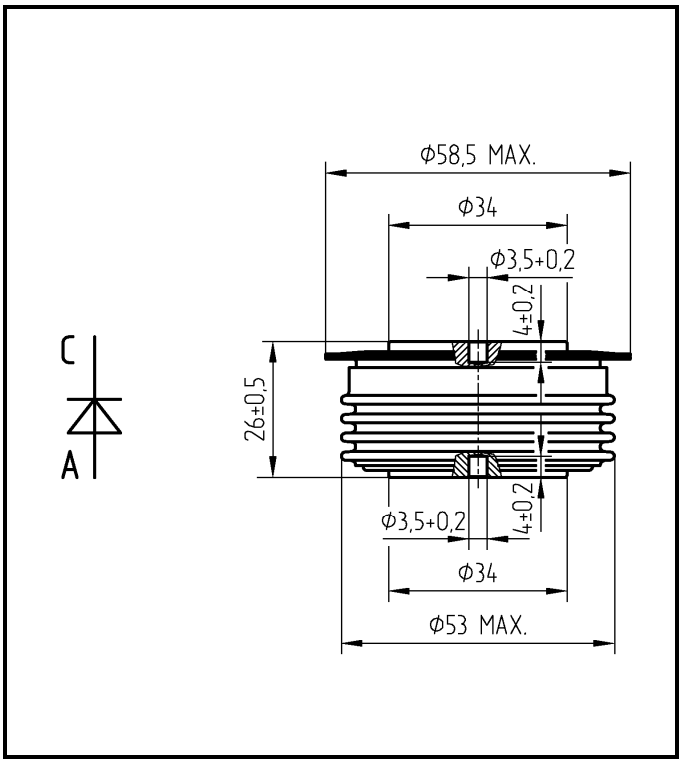

Fig. 1 Case

ABB s.r.o.
Novodvorska 1768/138a, 142 21 Praha 4, Czech Republic
tel.: +420 261 306 250, http://www.abb.com/semiconductors

Maximum Ratings			*Maximum Limits*	*Unit*
V_{RRM}	**Repetitive peak reverse voltage** T_j = -40 ÷ 160 °C		**5 000**	**V**
I_{FAVm}	**Average forward current** T_c = 85 °C		**1 028**	**A**
I_{FRMS}	**RMS forward current** T_c = 85°C		**1 614**	**A**
I_{RRM}	**Repetitive reverse current** $V_R = V_{RRM}$		**30**	**mA**
I_{FSM}	**Non repetitive peak surge current** V_R = 0 V, half sine pulse, T_j = 25 °C	t_p = 8.3 ms	**16 000**	**A**
		t_p = 10 ms	**15 000**	**A**
	Non repetitive peak surge current V_R = 0 V, half sine pulse	t_p = 8.3 ms	**12 800**	**A**
		t_p = 10 ms	**12 000**	**A**
I^2t	**Limiting load integral** V_R = 0 V, half sine pulse, T_j = 25 °C	t_p = 8.3 ms	**1 066 000**	**A^2s**
		t_p = 10 ms	**1 125 000**	**A^2s**
	Limiting load integral V_R = 0 V, half sine pulse	t_p = 8.3 ms	**682 000**	**A^2s**
		t_p = 10 ms	**720 000**	**A^2s**
T_{jmin} -T_{jmax}	**Operating temperature range**		**-40 ÷ 160**	**°C**
T_{STG}	**Storage temperature range**		**-40 ÷ 160**	**°C**

Unless otherwise specified T_j = 160 °C

Characteristics		*Value*			*Unit*
		min	*typ*	*max*	
V_{T0}	**Threshold voltage**			**0.894**	**V**
r_T	**Forward slope resistance** I_{F1} = 1 500 A, I_{F2} = 4 500 A			**0.487**	**mΩ**
V_{FM}	**Maximum forward voltage** I_{FM} = 1 500 A			**1.65**	**V**
Q_{rr}	**Recovered charge** V_R = 100 V, I_{FM} = 1 000 A, di/dt = -30 A/μs		**2 400**	**3 500**	**μC**

Unless otherwise specified T_j = 160 °C

Thermal Parameters			*Value*	*Unit*
R_{thjc}	**Thermal resistance junction to case**	*double side cooling*	**32**	**K/kW**
		anode side cooling	**50**	
		cathode side cooling	**88**	
R_{thch}	**Thermal resistance case to heatsink**	*double side cooling*	**8**	**K/kW**
		single side cooling	**16**	

Transient Thermal Impedance

Analytical function for transient thermal impedance

$$Z_{thjc} = \sum_{i=1}^{5} R_i (1 - \exp(-t / \tau_i))$$

Conditions:
F_m = 10 ± 2 kN, Double side cooled

Correction for periodic waveforms

180°	**sine:**	**2.3 K/kW**
180°	**rectangular:**	**3.1 K/kW**
120°	**rectangular:**	**5.1 K/kW**
60°	**rectangular:**	**8.7 K/kW**

i	1	2	3	4	5
τ_i (s)	0.7033	0.2185	0.0588	0.0042	0.0006
R_i (K/kW)	11.56	10.08	7.84	2.38	0.13

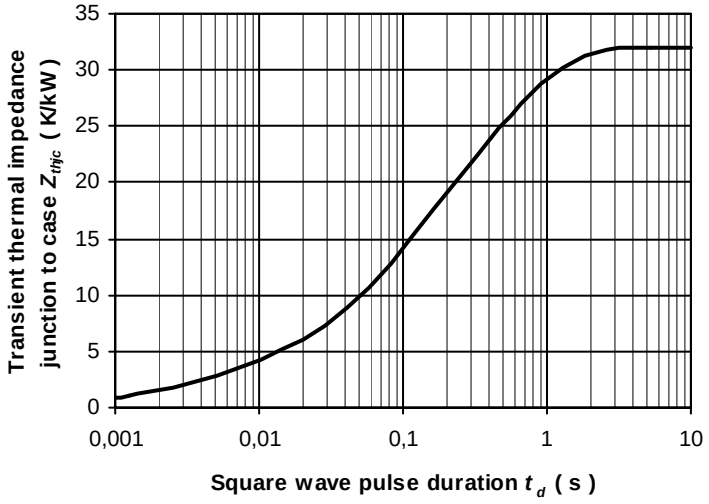

Fig. 2 Dependence transient thermal impedance junction to case on square pulse

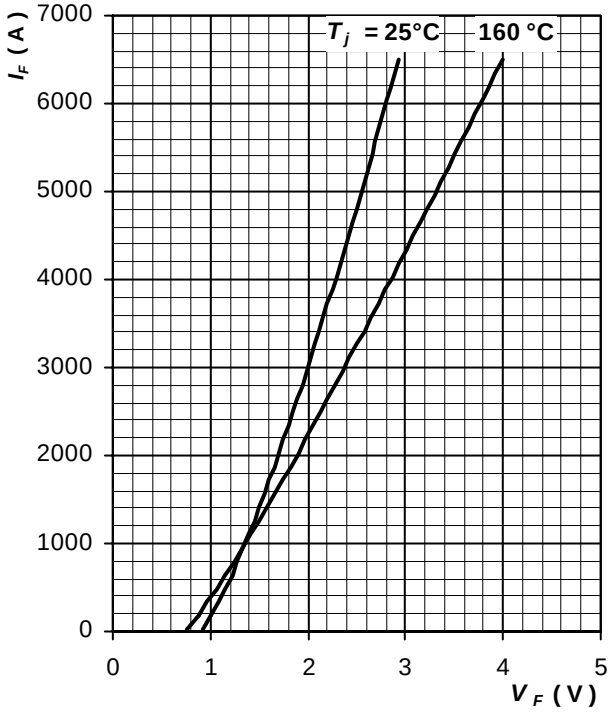

Fig. 3 Maximum forward voltage drop characteristics

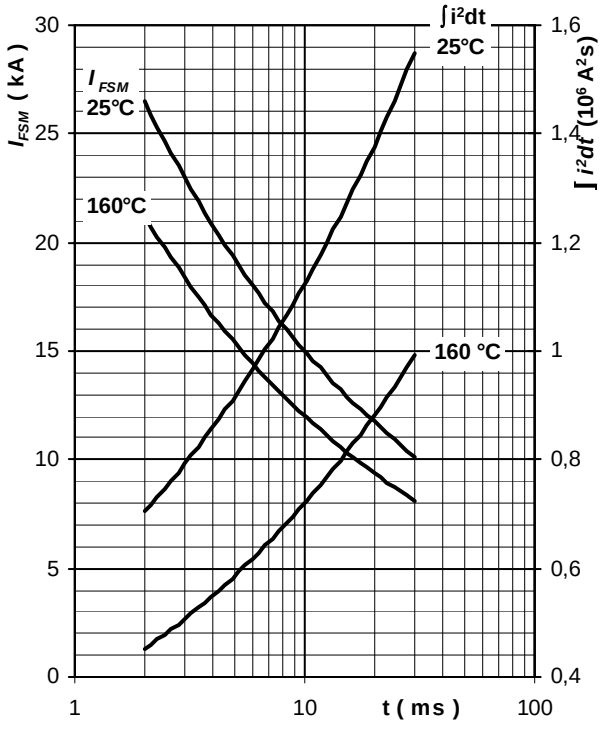

Fig. 4 Surge forward current vs. pulse length, half sine wave, single pulse, V_R = 0 V

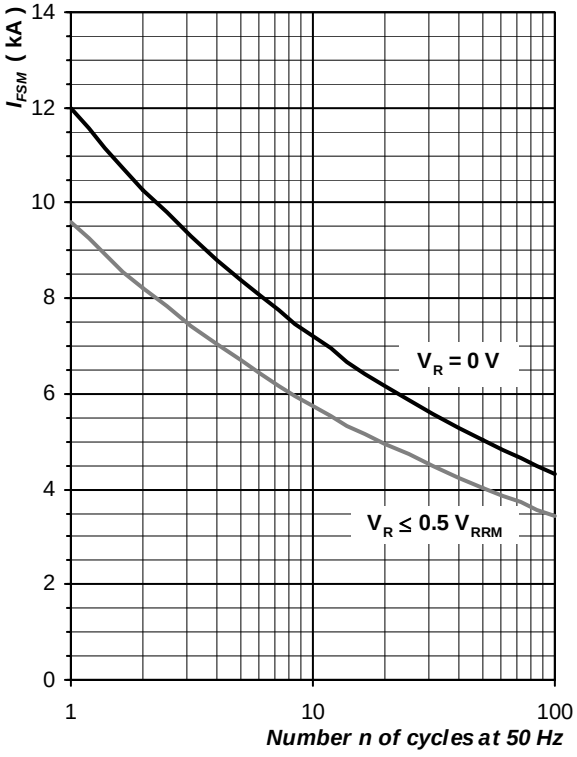

Fig. 5 Surge forward current vs. number of pulses, half sine wave, $T_j = T_{jmax}$

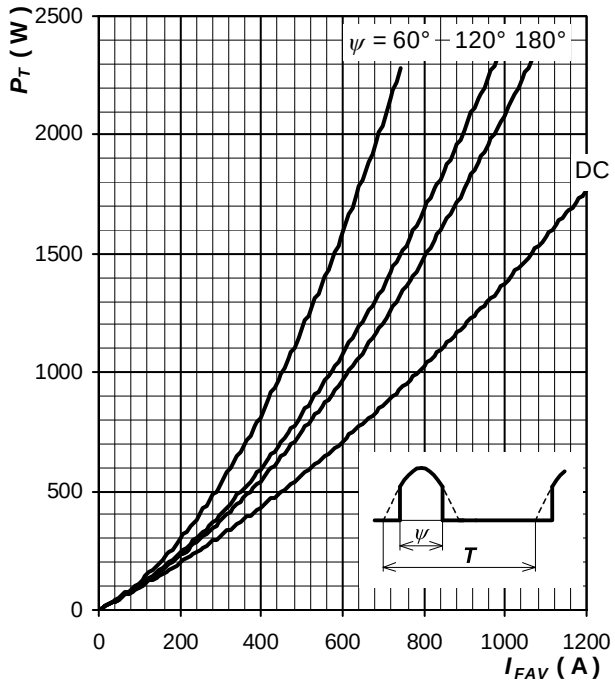

Fig. 6 Forward power loss vs. average forward current, sine waveform, f = 50 Hz, T = 1/f

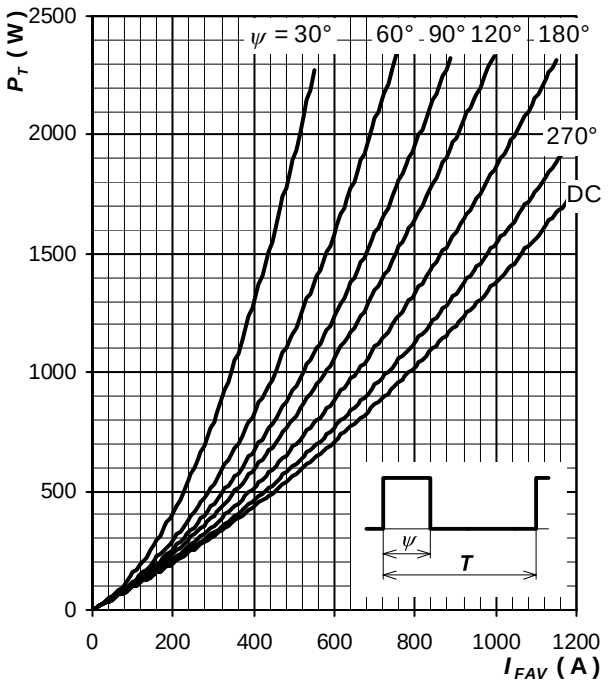

Fig. 7 Forward power loss vs. average forward current, square waveform,f = 50 Hz, T = 1/f

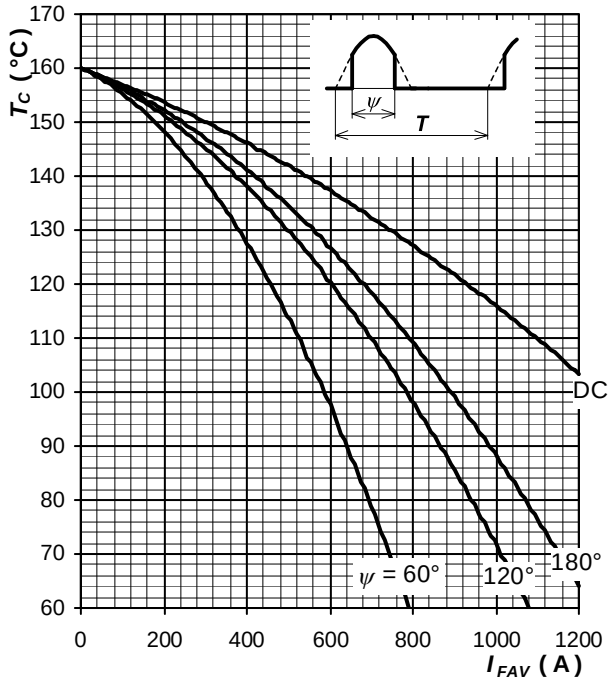

Fig. 8 Max. case temperature vs. aver. forward current, sine waveform, f = 50 Hz, T = 1/f

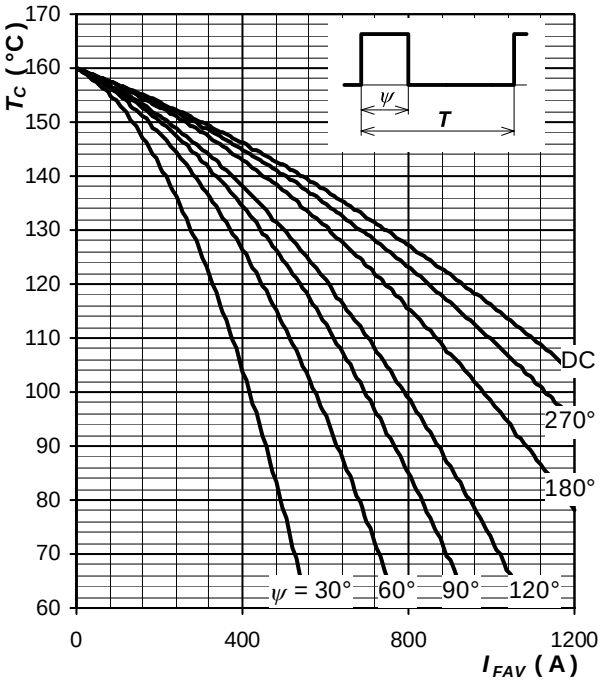

Fig. 9 Max.case temperature vs. aver. forward current, square waveform,f = 50 Hz, T = 1/f

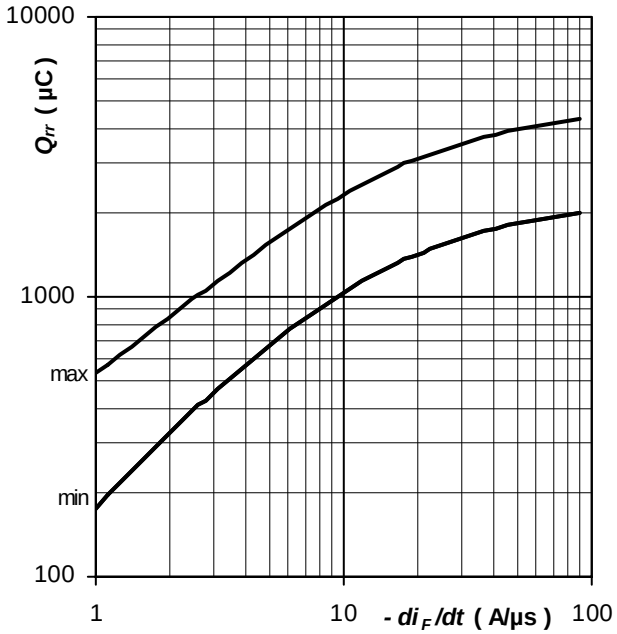

Fig. 10 Recovered charge Q_{rr}
vs. rate of fall forward current di_F/dt,
trapezoid pulse, I_{FM} *= 1 000 A,*
V_R *= 100 V,* $T_j = T_{jmax}$

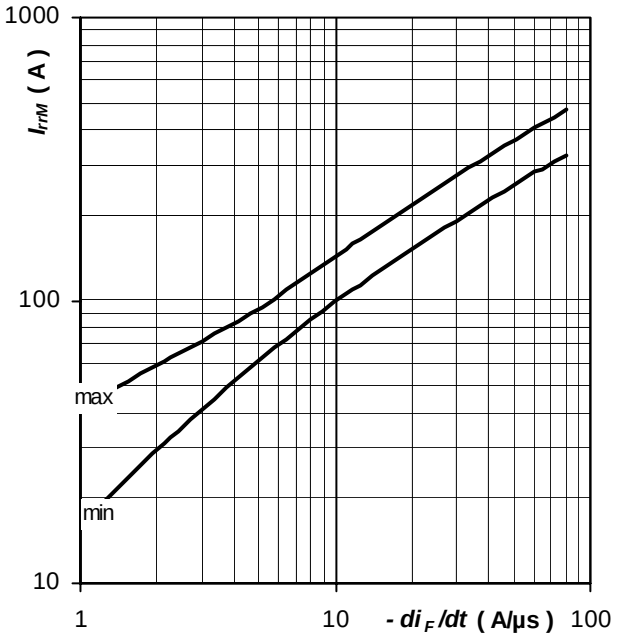

Fig. 11 Reverse recovery maximum current I_{rrM}
vs. rate of fall forward current di_F/dt,
trapezoid pulse, I_{FM} *= 1 000 A,*
V_R *= 100 V,* $T_j = T_{jmax}$

Notes:

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers ***category:***

Click to view products by ABB ***manufacturer:***

Other Similar products are found below :

70HFR40 RL252-TP 1N5397 NTE5841 NTE6038 SCF5000 1N4002G 1N4005-TR JANS1N6640US 481235F RRE02VS6SGTR 067907F MS306 70HF40 US2JFL-TP A1N5404G-G CRS04(T5L,TEMQ) ACGRA4007-HF ACGRB207-HF CLH03(TE16L,Q) ACGRC307-HF ACEFC304-HF NTE6356 NTE6359 NTE6002 NTE6023 NTE6039 NTE6077 85HFR60 40HFR60 1N1186RA 70HF120 85HFR80 D126A45C SCF7500 D251N08B SCHJ22.5K SM100 SCPA2 SDHD5K VS-12FL100S10 ACGRA4001-HF D1821SH45T PR D1251S45T NTE5990 NTE6358 NTE6162 NTE5850 SKN20/08 SKN300/16