

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1062

DUAL BUCK-BOOST + BUCK SYNCHRONOUS CONVERTERS

LTC3520

DESCRIPTION

Demonstration circuit 1062 is a micropower synchronous buck-boost + buck converter based on the LTC3520. The DC1062 has an input voltage range of 2.2 V to 5.5V and three output voltages: 3.3V @ up to 1A, 1.8V @ 600mA and 1.5V @ 200mA. The 1.5Vout is an LDO regulator derived from either the 3.3Vout or the 1.8Vout. The Buck-Boost + Buck converters can operate in either low-power burst mode or low-noise fixed-frequency PWM mode. The switching frequency is programmed using a single resistor and each of the

output voltages can be independently shutdown. The LTC3520 comes in a 24 pin 4x4 QFN package. These features make the DC1062 demo board an ideal circuit for use in Li-Ion battery-powered, hand-held applications.

Design files for this circuit board are available. Call the LTC factory.

LTC is a trademark of Linear Technology Corporation

QUICK START PROCEDURE

Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Start with Loads 1, 2 and 3 set to 0A.
2. Set Power Supply anywhere between 2.2V to 5.5V.

3. Loads 1, 2 and 3 can be set from 0 – 500mA, 0 – 600mA and 0 – 200mA respectively. Load 1 can be set up to 1A for $V_{in} > 3V$.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1062 DUAL BUCK-BOOST + BUCK SYNCHRONOUS CONVERTERS


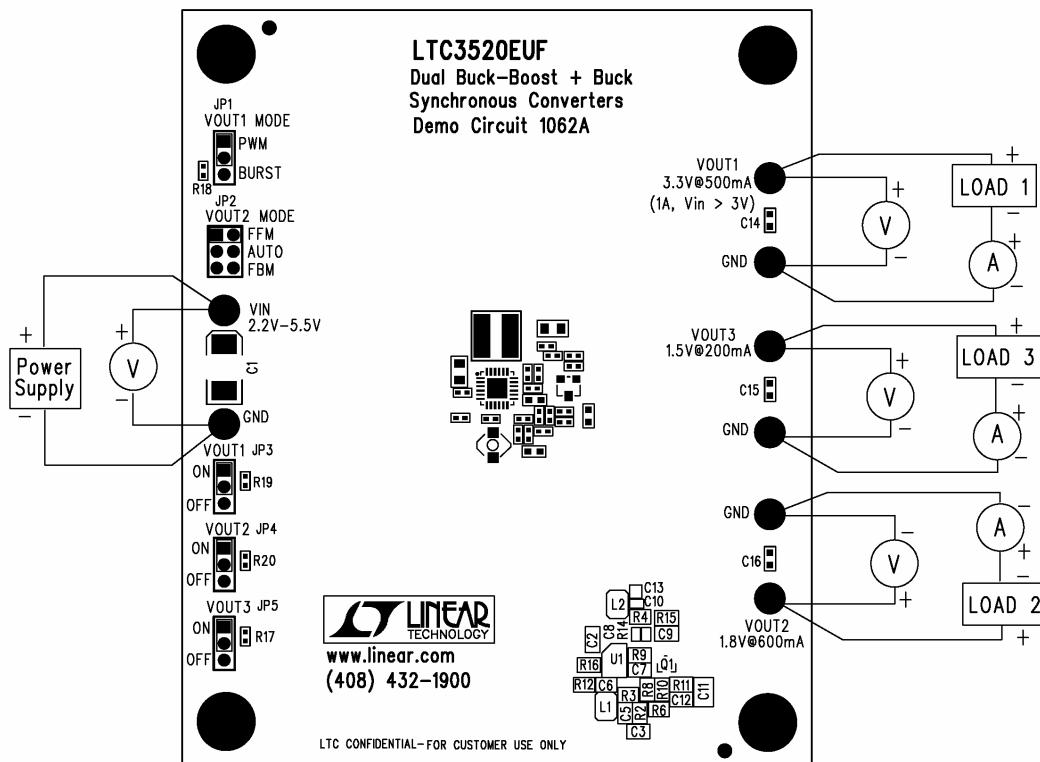


Figure 1.:Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1062

DUAL BUCK-BOOST + BUCK SYNCHRONOUS CONVERTERS

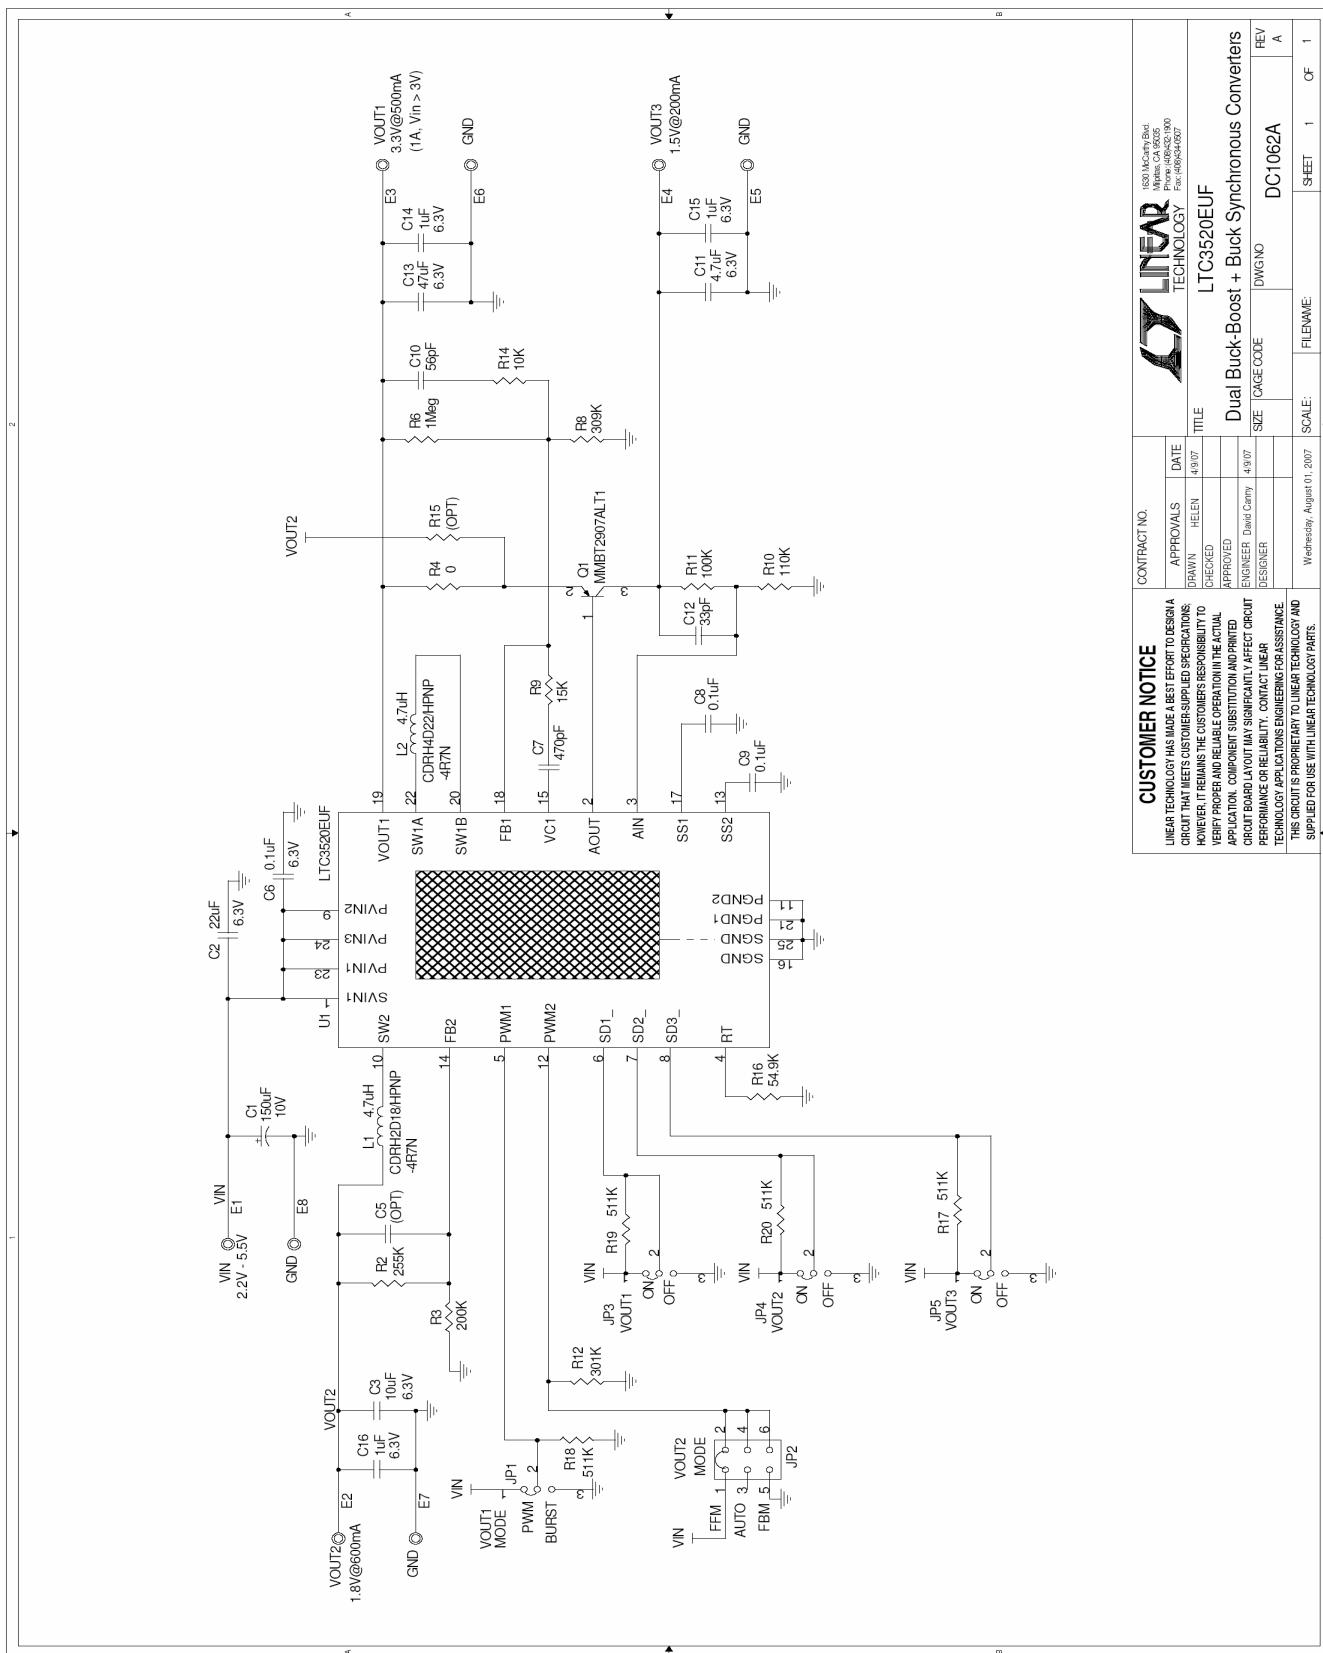

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1062 DUAL BUCK-BOOST + BUCK SYNCHRONOUS CONVERTERS

Item	Qty	Reference	Part Description	Manufacturer / Part #
REQUIRED CIRCUIT COMPONENTS:				
1	1	C1	CAP., TANT, 150µF, 10V, 20%, 7343	AVX, TPSD157M010R0100
2	1	C2	CAP., X5R, 220µF, 6.3V, 10%, 0805	Taiyo Yuden, JMK212BJ226KG-T
3	1	C11	CAP., X5R, 4.7µF, 6.3V, 10%, 0603	AVX, 06036D475KAT2A
4	1	C13	CAP., X5R, 4.7µF, 6.3V, 20%, 0805	Taiyo Yuden, JMK212BJ476MG-T
5	1	C3	CAP., X5R, 10µF, 6.3V, 20%, 0603	Taiyo Yuden, JMK107BJ106MA-T
6	3	C6,C8,C9	CAP., X5R, 0.1µF, 10V, 10%, 0402	Taiyo Yuden, LMK105BJ104KV-F
7	1	C7	CAP., COG, 470pF, 6.3V, 5%, 0603	AVX, 06036AA471JAT2A
8	1	C10	CAP., COG, 56pF, 16V, 5%, 0402	AVX, 0402YA560JAT2A
9	1	C12	CAP., COG, 33pF, 16V, 10%, 0402	AVX, 0402YA330KAT2A
10	3	C14,C15,C16	CAP., X5R, 1µF, 6.3V, 10%, 0603	Taiyo Yuden, JMK107BJ105KA-T
11	1	L1	INDUCTOR., 4.7uH	Sumida, CDRH2D18/HPNP-4R7NC
12	1	L2	INDUCTOR., 4.7uH	Sumida, CDRH4D22/HPNP-4R7NC
13	1	Q1	PNP TRANSISTERS, SOT23	ON Semiconductor, MMBT2907ALT1G
14	1	R2	RES., CHIP, 255K, 1/16W, 1%, 0402	VISHAY, CRCW0402255KFKED
15	1	R3	RES., CHIP, 200K, 1/16W, 1%, 0402	VISHAY, CRCW0402200KFKED
16	1	R4	RES., CHIP, 0, 1/16W, 0402	VISHAY, CRCW04020000Z0ED
17	4	R17-R20	RES., CHIP, 511K, 1/16W, 1%, 0402	VISHAY, CRCW0402511KFKED
18	1	R6	RES., CHIP, 1Meg, 1/16W, 1%, 0402	VISHAY, CRCW04021M00FKED
19	1	R8	RES., CHIP, 309K, 1/16W, 1%, 0402	VISHAY, CRCW0402309KFKED
20	1	R9	RES., CHIP, 15K, 1/16W, 1%, 0402	VISHAY, CRCW040215K0FKED
21	1	R10	RES., CHIP, 110K, 1/16W, 1%, 0402	VISHAY, CRCW0402110KFKED
22	1	R14	RES., CHIP, 10K, 1/16W, 1%, 0402	VISHAY, CRCW040210K0FKED
23	1	R11	RES., CHIP, 100K, 1/16W, 1%, 0402	VISHAY, CRCW0402100KFKED
24	1	R12	RES., CHIP, 301K, 1/16W, 1%, 0402	VISHAY, CRCW0402301KFKED
25	1	R16	RES., CHIP, 54.9K, 1/16W, 1%, 0402	VISHAY, CRCW040254K9FKED
26	1	U1	I.C., LTC3520EU#PBF, 4x4mm QFN	LINEAR TECH., LTC3520UEUF#PBF
ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS:				
1	0	R15(OPT)	RES., CHIP, 0402	
2	0	C5(OPT)	CAP., 0402	
HARDWARE-FOR DEMO BOARD ONLY:				
1	8	E1-E8	TESTPOINT, TURRET, .095"	MILL-MAX, 2501-2-00-80-00-07-0
2	1	JP2	2MM DOUBLE ROW HEADER 2x3	SAMTEC, TMM-103-02-L-D
3	4	JP1,JP3-JP5	0.079 SINGLE ROW HEADER, 3 PIN	SAMTEC, TMM-103-02-L-S
4	5	JP1-JP5	SHUNT,	SAMTEC, 2SN-BK-G
5	4	STAND-OFF	STAND-OFF, NYLON 0.50" tall	KEYSTONE, 8833(SNAP ON)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Management IC Development Tools category:

Click to view products by Analog Devices manufacturer:

Other Similar products are found below :

[EVAL-ADM1168LQEbz](#) [EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [DA9063-EVAL](#) [ADP122-3.3-EVALZ](#) [ADP130-0.8-EVALZ](#) [ADP130-1.2-EVALZ](#) [ADP130-1.5-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1714-3.3-EVALZ](#) [ADP1716-2.5-EVALZ](#) [ADP1740-1.5-EVALZ](#) [ADP1752-1.5-EVALZ](#) [ADP1828LC-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1871-0.6-EVALZ](#) [ADP1873-0.6-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP1882-1.0-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [ADP2106-1.8-EVALZ](#) [ADP2147CB-110EVALZ](#) [AS3606-DB](#) [BQ24010EVM](#) [BQ24075TEVM](#) [BQ24155EVM](#) [BQ24157EVM-697](#) [BQ24160EVM-742](#) [BQ24296MEVM-655](#) [BQ25010EVM](#) [BQ3055EVM](#) [NCV891330PD50GEVB](#) [ISLUSBI2CKIT1Z](#) [LM2744EVAL](#) [LM2854EVAL](#) [LM3658SD-AEV/NOPB](#) [LM3658SDEV/NOPB](#) [LM3691TL-1.8EV/NOPB](#) [LM4510SDEV/NOPB](#) [LM5033SD-EVAL](#) [LP38512TS-1.8EV](#) [EVAL-ADM1186-1MBZ](#) [EVAL-ADM1186-2MBZ](#)