

LT8631

100V, 1A Synchronous Micropower Step-Down Regulator

DESCRIPTION

Demonstration circuit 2110A is a monolithic step-down converter featuring LT[®]8631. The demo board is designed for 5V output from a 6.5V to 100V input at 400kHz switching frequency. The wide input range makes it suitable for regulating power from a wide variety of sources, including automotive, industrial systems and telecom supplies. The LT8631 is a compact, high efficiency synchronous monolithic step-down switching regulator. The power switch, compensation and other necessary circuits are inside of the LT8631 to minimize external components and simplify design.

The LT8631 switching frequency can be programmed either via oscillator resistor or external clock over a 100kHz to 1MHz range. The SYNC pin on the demo board is grounded (JP1 at Burst Mode[®] position) by default for low ripple Burst Mode operation. To synchronize to an external clock, move JP1 to SYNC and apply the external clock to the SYNC turret. If the pulse-skipping operation is required, move JP1 to fixed frequency position. Figure 1 shows the efficiency of the circuit at 12V input at the Burst Mode selection.

The demo board has an EMI filter installed. The EMI performance of the board (with EMI filter) is shown in Figure 2. The red line in Figure 2 is CISPR25 Class 5 peak limit. The figure shows that the circuit passes the test with a wide margin. To achieve EMI/EMC performance as shown

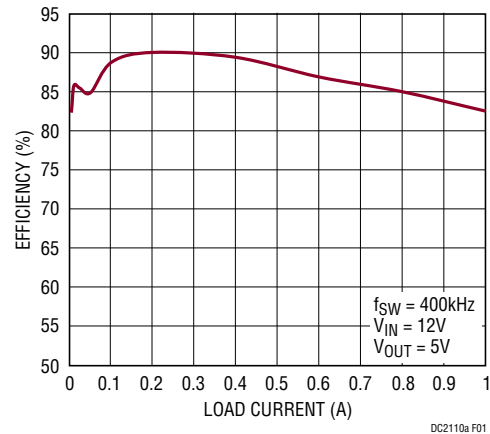


Figure 1. LT8631 Efficiency vs Load Current

in Figure 2, the input EMI filter is required and the input voltage should be applied at V_{EMI} turret pin, not V_{IN} .

The LT8631 data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this demo manual for demo circuit 2110A. The LT8631 is assembled in a 20-lead TSSOP packages. Proper board layout is essential for maximum thermal and electrical performance. See the data sheet sections for details.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2110A>

LT, LT, LTC, LTM, Linear Technology, Burst Mode and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at $T_A = 25^\circ\text{C}$

| SYMBOL | PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------|---------------------|--|------|------|-----|-------|
| V_{IN} | Input Supply Range | | 6.5 | | 100 | V |
| V_{OUT} | Output Voltage | | 4.88 | 5.04 | 5.2 | V |
| f_{SW} | Switching Frequency | $R_T = 25.5\text{k}\Omega$ | 370 | 400 | 430 | kHz |
| I_{OUT} | Max Output Current | $V_{IN} = 12\text{V}$ | 1 | | | A |
| E_{FE} | Efficiency at DC | $V_{IN} = 12\text{V}, I_{OUT} = 1\text{A}$ | | 82.6 | | % |
| | | $V_{IN} = 12\text{V}, I_{OUT} = 0.4\text{A}$ | | 89.5 | | % |

QUICK START PROCEDURE

Demonstration circuit 2110A is easy to set up to evaluate the performance of the LT8631. Refer to Figure 3 for proper measurement equipment setup and follow the procedure below:

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT} and GND terminals. See Figure 4 for the proper scope technique.

1. Place JP1 on GND position.
2. With power off, connect the input power supply to V_{EMI} and GND. If the EMI/EMC performance is not important, the input EMI filter can be bypassed by connecting the input power supply to V_{IN} and GND.
3. With power off, connect loads from V_{OUT} to GND.

4. Turn on the power at the input.

Make sure that the input voltage does not exceed 100V.

5. Check for the proper output voltages ($V_{OUT} = 5V$).

NOTE. If there is no output, temporarily disconnect the load to make sure that the load is not set too high or is shorted.

6. Once the proper output voltage is established, adjust the load within the operating ranges and observe the output voltage regulation, ripple voltage, efficiency and other parameters.
7. An external clock can be added to the SYNC terminal when SYNC function is used (JP1 on the SYNC position). Please ensure that the chosen RT sets the LT8631 switching frequency to 10% below the lowest SYNC frequency. See the data sheet Synchronization section for details.

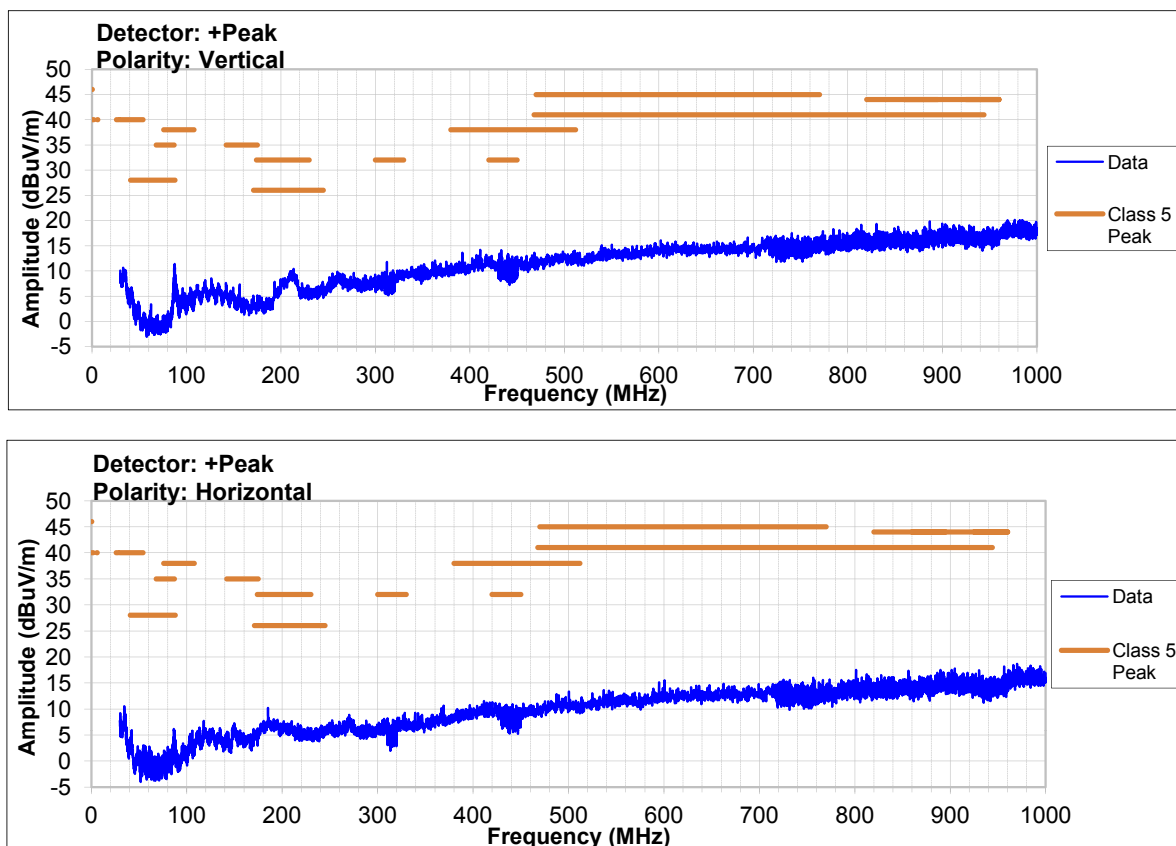


Figure 2. LT8631 Demo Circuit DC2110A EMI Performance in CISPR25 Radiated Emission Test (14V Input from V_{EMI} Turret Pin, $I_{OUT} = 1A$)

QUICK START PROCEDURE

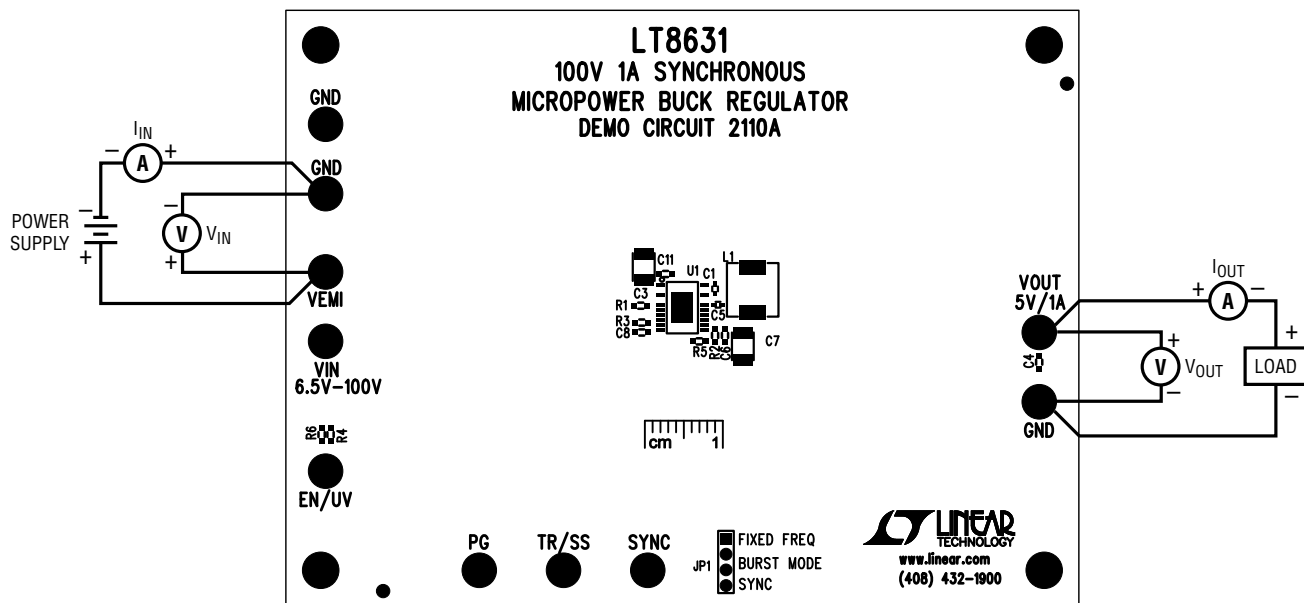


Figure 3. Proper Measurement Equipment Setup

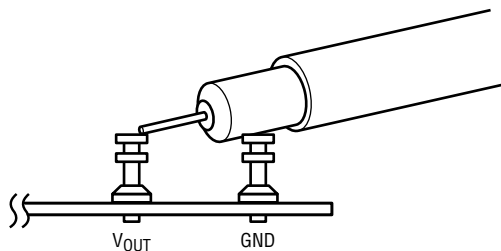



Figure 4. Measurement Input or Output Ripple

DEMO MANUAL DC2110A

PARTS LIST

| ITEM | QTY | REFERENCE | PART DESCRIPTION | MANUFACTURER/PART NUMBER |
|---|-----|------------|--------------------------------------|-----------------------------------|
| Required Circuit Components | | | | |
| 1 | 1 | C1 | CAP, 0.1 μ F, X7R, 10V, 10% 0402 | TDK, C1005X7R1A104K |
| 2 | 1 | C5 | CAP, 2.2 μ F, X5R, 10V, 10% 0402 | TDK, C1005X5R1A225K050BC |
| 3 | 1 | C6 | CAP, 4.7pF, C0G, 50V, 0.25pF 0603 | MURATA, GRM1885C1H4R7CA01D |
| 4 | 1 | C7 | CAP, 47 μ F, X7R, 10V, 20% 1210 | MURATA, GRM32ER71A476KE15L |
| 5 | 1 | C8 | CAP, 0.1 μ F, X7R, 10V, 10% 0603 | AVX, 0603ZC104KAT2A |
| 6 | 1 | C4 | CAP, 1 μ F, X7R, 10V, 10% 0603 | SAMSUNG, CL10B105KP8NNNC |
| 7 | 1 | L1 | INDUCTOR, 22 μ H IHLP2525 | VISHAY, IHLP2525CZER220M11 |
| 8 | 1 | L2 | INDUCTOR, 2.2 μ H | COILCRAFT, XFL4020-222MEB |
| 9 | 1 | R1 | RES, 51.1k, 1/10W, 1% 0603 | VISHAY, CRCW060351K1FKEA |
| 10 | 2 | R2, R4 | RES, 1M, 1/10W, 1% 0603 | VISHAY, CRCW06031M00FKEA |
| 11 | 1 | R3 | RES, 25.5k, 1/10W, 1% 0603 | VISHAY, CRCW060325K5FKEA |
| 12 | 1 | R5 | RES, CHIP, 191k, 1/10W, 1% 0603 | VISHAY, CRCW0603191KFEA |
| 13 | 1 | U1 | IC, BUCK REG FE-20(16) CB | LINEAR TECHNOLOGY, LT8631EFE#PBF |
| Additional Demo Board Circuit Components | | | | |
| 1 | 1 | C2 | CAP, ALUM, 10 μ F, 100V | SUN ELECTRONIC, 100CE10BS |
| 2 | 0 | C11 (OPT) | CAP, 0603 | |
| 3 | 0 | D1 (OPT) | SCHOTTKY BARRIER REC, POWER-DI-123 | |
| Hardware: For Demo Board Only | | | | |
| 1 | 10 | E1 TO E10 | TEST POINT, TURRET, 0.094" MTG.HOLE | MILL-MAX, 2501-2-00-80-00-00-07-0 |
| 2 | 1 | JP1 | 4 PIN 0.079 SINGLE ROW HEADER | SULLIN, NRPN041PAEN-RC |
| 3 | 1 | XJP1 | SHUNT, 0.079" CENTER | SAMTEC, 2SN-BK-G |
| 4 | 0 | R6 (OPT) | RES, 0603 | |
| 5 | 4 | MH1 TO MH4 | STAND-OFF, NYLON 0.50" | KEYSTONE, 8833 (SNAP ON) |

SCHEMATIC DIAGRAM

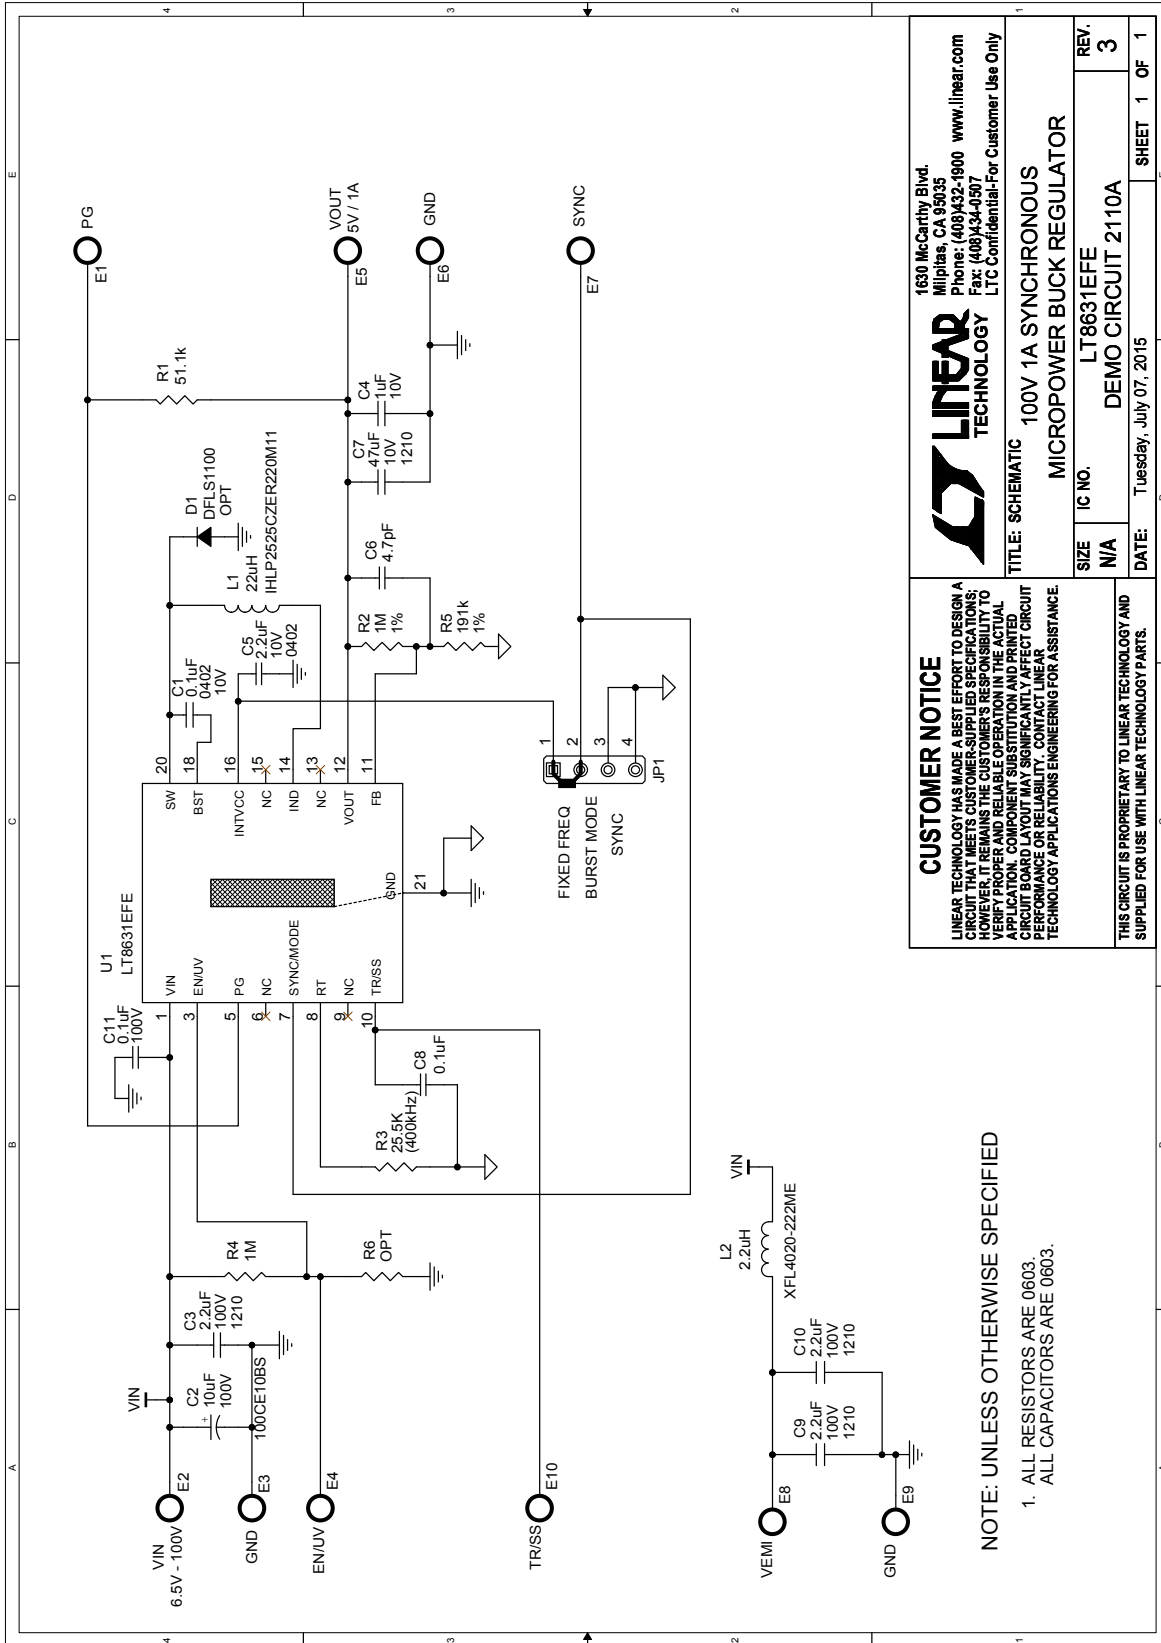

LINEAR TECHNOLOGY
 1630 McCarthy Blvd.
 Milpitas, CA 95035
 Phone: (408)432-1900 www.linear.com
 Fax: (408)434-0907
 LTC Confidential-For Customer Use Only

100V 1A SYNCHRONOUS MICROPOWER BUCK REGULATOR

| | | |
|-------|------------------------|--------------|
| SIZE | IC NO. | REV. |
| N/A | LT8631EFE | 3 |
| DATE: | DEMO CIRCUIT 2110A | SHEET 1 OF 1 |
| | Tuesday, July 07, 2015 | |

CUSTOMER NOTICE
 LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT BOARD LAYOUT THAT MEETS THE CUSTOMER'S REQUIREMENTS FOR PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

NOTE: UNLESS OTHERWISE SPECIFIED
 1. ALL RESISTORS ARE 0603.
 ALL CAPACITORS ARE 0603.

DEMO MANUAL DC2110A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management IC Development Tools](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[EVAL-ADM1168LQEBZ](#) [EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [DA9063-EVAL](#) [ADP122-3.3-EVALZ](#) [ADP130-0.8-EVALZ](#) [ADP130-1.2-EVALZ](#) [ADP130-1.5-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1714-3.3-EVALZ](#) [ADP1716-2.5-EVALZ](#) [ADP1740-1.5-EVALZ](#) [ADP1752-1.5-EVALZ](#) [ADP1828LC-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1871-0.6-EVALZ](#) [ADP1873-0.6-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP1882-1.0-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [ADP2106-1.8-EVALZ](#) [ADP2147CB-110EVALZ](#) [AS3606-DB](#) [BQ24010EVM](#) [BQ24075TEVM](#) [BQ24155EVM](#) [BQ24157EVM-697](#) [BQ24160EVM-742](#) [BQ24296MEVM-655](#) [BQ25010EVM](#) [BQ3055EVM](#) [NCV891330PD50GEVB](#) [ISLUSBI2CKIT1Z](#) [LM2744EVAL](#) [LM2854EVAL](#) [LM3658SD-AEV/NOPB](#) [LM3658SDEV/NOPB](#) [LM3691TL-1.8EV/NOPB](#) [LM4510SDEV/NOPB](#) [LM5033SD-EVAL](#) [LP38512TS-1.8EV](#) [EVAL-ADM1186-1MBZ](#) [EVAL-ADM1186-2MBZ](#)