## QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 513 SOFTWARE-SELECTABLE MULTI-PROTOCOL TRANSCEIVER

#### LTC2846CG/LTC2845CG

### DESCRIPTION

Demonstration circuit 513 is a complete DCE or DTE serial port. The protocols supported are V.28 (RS232), V.35, V.36, RS449, EIA530, EIA530A and X.21. Six jumpers select the proper protocol and other port-configuration settings. One jumper turns on/off the internal switching regulator of the LTC<sup>®</sup>2846. The board provides a vehicle for observing the line drivers and receivers on the LTC2845 and LTC2845. Logic-level signals enter and exit the board on the left side and line-level signals enter and exit on the right. The internally generated supplies are observable on the pins at the top of the board.

DC513 is intended for network equipment that interfaces to other equipment using standard serial connections. These applications include routers and wide area networks. The interface design work is as simple as placing this chipset on a board with a handful of small, inexpensive components.

# Design files for this circuit board are available. Call the LTC factory.

LTC is a trademark of Linear Technology Corporation



## QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 513 SOFTWARE-SELECTABLE MULTI-PROTOCOL TRANSCEIVER

PARAMETER	CONDITION	VALUE
Input Voltage	With Onboard Boost Regulator	3.3V
	Without Boost Regulator	5.0V
I <sub>cc</sub>	No Cable Mode	300uA
lshutdown	Boost Regulator Quiescent Current	10nA
Vquiescent	Boost Regulator Not Switching	4.2mA
Logic Level Hi	D1,D2,D3,M0,M1,M2,DCE/DTE	2.0V
	SHDN	2.4V
Logic Level Low	D1,D2,D3,M0,M1,M2,DCE/DTE	0.8V
	SHDN	0.5V
Receiver Differential Input Impedance	V.11	103Ω
	V.35	90-110Ω
	V.28	3-7ΚΩ
Receiver Common Mode Input Impedance	V.35	135-165Ω
Transmitter Differential Mode Impedance	V.35	50-150Ω
Transmitter Common Mode Impedance	V.35	135-165Ω
Driver T <sub>r</sub> , T <sub>f</sub>	V.11	15ns
	V.35	5ns
Driver Slew Rate	V.28	4-30V/µs
Receiver Input Hysteresis	V.11	15mV
	V.35	15mV
	V.28	50mV

Table 1. Performance Summary  $(T_A = 25^{\circ}C)$ 

## **QUICK START PROCEDURE**

- 1. Connect the input voltage power supply, meters, pulse generator and oscilloscope as shown in Figure 1.
- 2. The pulse generator should be set to a 0V to 3.3V swing.
- 3. SHDN should be set to '1' to turn on the internal switching regulator of the LTC2846
- 4. The mode pins M0, M1 and M2, plus the configuration pin DCE/ $\overline{\text{DTE}}$  should be configured for the

desired protocol and port setting. (M0 = 0, M1 = 1, M2 = 0 and DCE/ $\overline{DTE}$  = 0 selects the RS530 DTE mode)

- 5. Observe the waveforms on the logic signal side and the line signal side of the board. The line driver (TXDA, TXDB) is connected to the line receiver (RXCA, RXCB) to demonstrate the line signals. RTS is also connected to DSR.
- 6. Observe the internally generated supplies (V $_{\rm CC}$  , V $_{\rm EE}$  and V $_{\rm DD})$




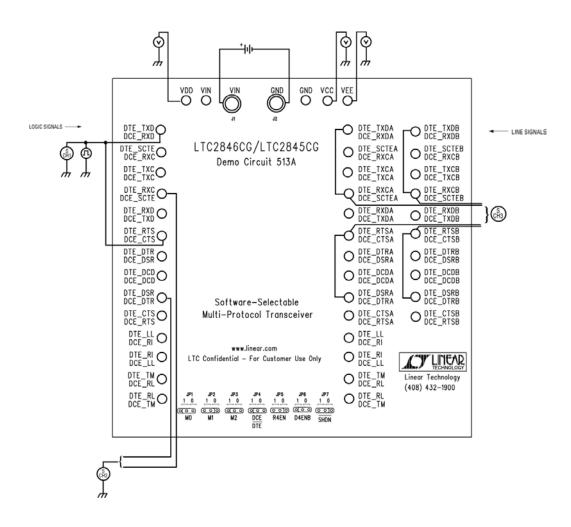


Figure 1. Proper Measurement Equipment Setup



## QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 513 SOFTWARE-SELECTABLE MULTI-PROTOCOL TRANSCEIVER

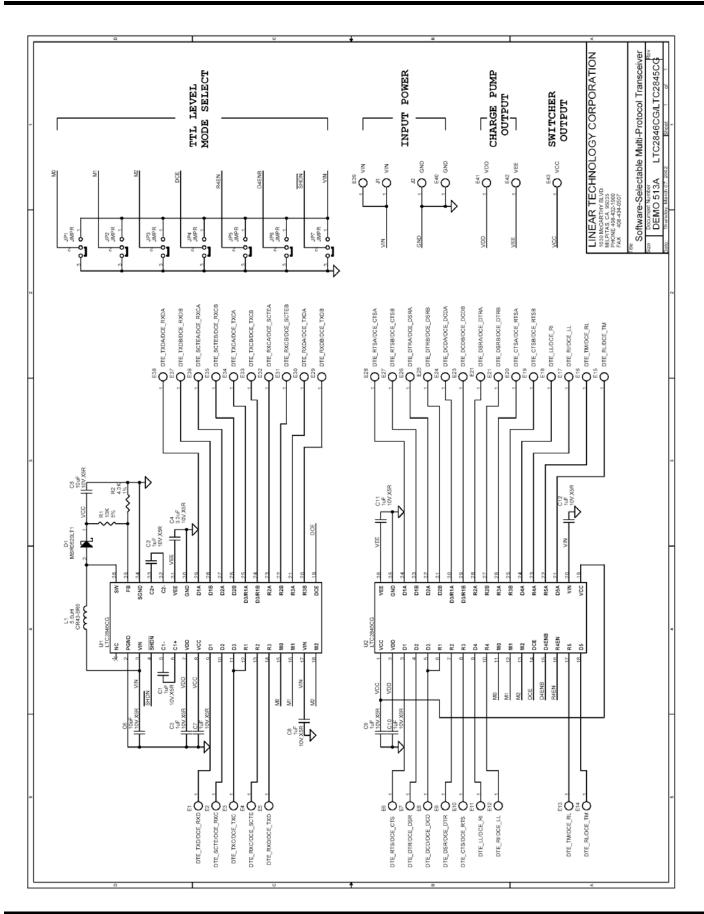

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Interface Development Tools category:

Click to view products by Analog Devices manufacturer:

Other Similar products are found below :

DP130SSEVM ISO3086TEVM-436 ADP5585CP-EVALZ CHA2066-99F AS8650-DB MLX80104 TESTINTERFACE I2C-CPEV/NOPB ISO35TEVM-434 416100120-3 XR18910ILEVB XR21B1421IL28-0A-EVB EVAL-ADM2491EEBZ MAXREFDES23DB# MAX9286COAXEVKIT# MAX3100EVKIT MAX13235EEVKIT MAX14970EVKIT# XR21B1424IV64-0A-EVB CMOD232+ MAX13042EEVKIT+ MAX14838EVKIT# MAXCAM705OV635AAA# MAX9205EVKIT DS100BR111AEVK/NOPB DC241C MAX9286RCARH3DB# MAX13035EEVKIT+ DC1794A SN65HVS885EVM EVB81112-A1 DFR0257 ZLR964122L ZLR88822L DC196A-B DC196A-A DC327A OM13585UL MAX16972AGEEVKIT# MARS1-DEMO3-ADAPTER-GEVB MAX7315EVKIT+ PIM511 PIM536 PIM517 DEV-17512 STR-FUSB3307MPX-PPS-GEVK MAXREFDES177# EVAL-ADM2567EEBZ EVAL-ADN4654EBZ MAX9275COAXEVKIT# MAX2202XEVKIT#