

DESCRIPTION


Demonstration Circuit 960 is a high voltage, current-mode DC/DC step-down converter featuring the LTC3824 in a small 10-pin MSOP package.

The board operates from a V_{in} range of 5.5V – 60V and outputs 5V_{out} @ 2A. The Converter uses a P-Ch MOSFET for the main switch resulting in a low parts count design. Operating frequency is set to 200kHz with the option to accept a synchronized external clock. A soft-start feature controls the output voltage slew rate at start-up, reducing current surges and voltage overshoots. Burst Mode operation that improves the effi-

ciency at light loads can be enabled with a jumper. The demonstration board has been laid out with the option for adding a second switching MOSFET to facilitate higher output currents.

This board is suitable for a wide range of Industrial control systems and particularly suitable for 12V/42V Automotive applications and 48V Telecom power supplies.

Design files for this circuit board are available. Call the LTC factory.

 , LTC and LT are registered trademarks of Linear Technology Corporation.

QUICK START PROCEDURE

DC960 is easy to set up to evaluate the performance of the LTC3824. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

1. Use a 65V/8A or better Bench Power Supply.
2. Set the Power supply voltage to somewhere between 5V and 60V.
3. Set the Load to somewhere between 0 – 2A.
4. Make sure the SHDN/RUN jumper is in the RUN position.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 960 HIGH VOLTAGE, P-CH MOSFET STEP-DOWN CONTROLLER

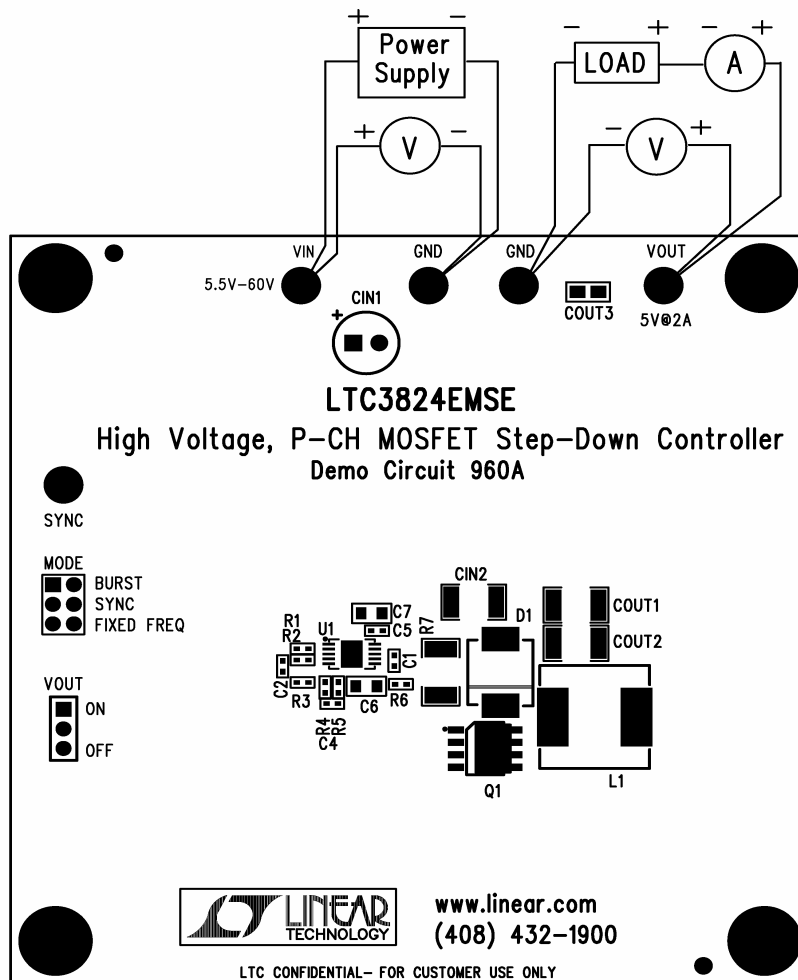


Figure 1. Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 960
HIGH VOLTAGE, P-CH MOSFET STEP-DOWN CONTROLLER

Item	Qty	Reference	Part Description	Manufacturer / Part #
REQUIRED CIRCUIT COMPONENTS:				
1	1	CIN1	Cap., Alum, 33uF, 63V, 20% (thru hole)	SANYO, 63ME33AX+TS
2	1	CIN2	Cap., X7R, 2.2uF, 100V, 20%, 1812	TDK, C4532X7R2A225M
3	2	COUT1, COUT2	CAP., X5R, 100uF, 6.3V, 20%, 1812	TDK, C4532X5R0J107M
4	1	COUT3	CAP., X5R, 1uF, 6.3V, 10%, 0603	AVX, 06036D105KAT
5	2	C1, C4	Cap., COG, 100pF, 50V, 10%, 0402	AVX, 04025A101KAT
6	1	C2	Cap., X7R, 3.3nF, 50V, 10%, 0402	AVX, 04025C332KAT
7	1	C5	Cap., X7R, 0.1uF, 16V, 10%, 0402	TDK, C1005X7R1C104K
8	2	C6, C7	Cap., X7R, 0.1uF, 100V, 10%, 0805	TDK, C2012X7R2A104K
9	1	D1	SCHOTTKY DIODE 90V	VISHAY, SS3H9-E3
10	2	L1	INDUCTOR, 22uH	TOKO, #919AS-220M=P3
11	1	Q1	P-CHANNEL MOSFET, SO-8 POWERPAK	VISHAY, Si7465DP-T1-E3
12	0	R1	RES., CHIP, 392K, 1/16W, 1%, 0402	AAC, CR05-3923FM
13	1	R2	RES., CHIP, 10K, 1/16W, 1%, 0402	AAC, CR05-1002FM
14	1	R3	RES., CHIP, 80.6K, 1/16W, 1%, 0402	AAC, CR05-8062FM
15	1	R4	RES., CHIP, 51, 1/16W, 5%, 0402	AAC, CR05-510JM
16	1	R5	RES., CHIP, 422K, 1/16W, 1%, 0402	AAC, CR05-4223FM
17	1	R6	RES., CHIP, 0, 1/16W, 0402	VISHAY, CRCW0402000Z0ED
18	1	R7	RES., CHIP, 0.025, 0.5W, 1%, 2010	VISHAY, WSL2010R0250FEA
19	4	U1	I.C, LTC3824EMSE#PBF, 10PIN MSOP	LINEAR TECH., LTC3824EMSE#PBF
ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS:				
1	1	Q2(OPT)	P-CHANNEL MOSFET, D-PAK	FAIRCHILD SEMICONDUCTOR, FQD17P06
HARDWARE-FOR DEMO BOARD ONLY:				
1	1	JP1	0.079 SINGLE ROW HEADER, 3 PIN	SAMTEC, TMM-103-02-L-S
2	1	JP2	0.079 DOUBLE ROW HEADER, 6 PIN	SAMTEC, TMM-103-02-L-D
3	1	JP1, JP2	SHUNT,	SAMTEC, 2SN-BK-G
4	5	E1-E5	TESTPOINT, TURRET, .095"	MILL-MAX, 2501-2-00-80-00-00-07-0
5	4	(STAND-OFF)	STAND-OFF, NYLON 0.25" tall	KEYSTONE, 8831(SNAP ON)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management IC Development Tools](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[EVAL-ADM1168LQEBZ](#) [EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [DA9063-EVAL](#) [ADP122-3.3-EVALZ](#) [ADP130-0.8-EVALZ](#) [ADP130-1.2-EVALZ](#) [ADP130-1.5-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1714-3.3-EVALZ](#) [ADP1716-2.5-EVALZ](#) [ADP1740-1.5-EVALZ](#) [ADP1752-1.5-EVALZ](#) [ADP1828LC-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1871-0.6-EVALZ](#) [ADP1873-0.6-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP1882-1.0-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [ADP2106-1.8-EVALZ](#) [ADP2147CB-110EVALZ](#) [AS3606-DB](#) [BQ24010EVM](#) [BQ24075TEVM](#) [BQ24155EVM](#) [BQ24157EVM-697](#) [BQ24160EVM-742](#) [BQ24296MEVM-655](#) [BQ25010EVM](#) [BQ3055EVM](#) [NCV891330PD50GEVB](#) [ISLUSBI2CKIT1Z](#) [LM2744EVAL](#) [LM2854EVAL](#) [LM3658SD-AEV/NOPB](#) [LM3658SDEV/NOPB](#) [LM3691TL-1.8EV/NOPB](#) [LM4510SDEV/NOPB](#) [LM5033SD-EVAL](#) [LP38512TS-1.8EV](#) [EVAL-ADM1186-1MBZ](#) [EVAL-ADM1186-2MBZ](#)