




Typical Applications

A high linearity 1 watt amplifier for:

- Multi-Carrier Systems
- GSM, GPRS & EDGE
- CDMA & W-CDMA
- PHS
- Balanced or Push-Pull Configurable

Functional Diagram



HMC461LP3 / 461LP3E

InGaP HBT 1 Watt High IP3 AMPLIFIER, 1.7 - 2.2 GHz

Features

+45 dBm Output IP3 (Balanced Configuration) 12 dB Gain 48% PAE @ +30.5 dBm Pout +20 dBm W-CDMA Channel Power @ -45 dBc ACP 3x3 mm QFN SMT Package

General Description

The HMC461LP3 & HMC461LP3E are 1.7 - 2.2 GHz high output IP3 GaAs InGaP Heterojunction Bipolar Transistor (HBT) dual-channel MMIC amplifiers. The linear performance of two HMC455LP3 high IP3 drivers is offered in this single IC which can be configured in a balanced or push-pull amplifier circuit. The amplifier provides 12 dB of gain and +30.5 dBm of saturated power at 48% PAE from a single +5 Vdc supply while utilizing external baluns in a balanced configuration. The high output IP3 of +45 dBm coupled with the low VSWR of 1.2:1 make the HMC461LP3 & HMC461LP3E ideal driver amplifiers for PCS/3G wireless infrastructures. A low cost, leadless 3x3 mm QFN surface mount package (LP3) houses the dual MMIC amplifier IC. The LP3 provides an exposed base for excellent RF and thermal performance.

Electrical Specifications^{*}, $T_{a} = +25^{\circ} C$, Vs = +5V

Parameter	Min.	Тур.	Max.	Min.	Тур.	Max.	Units
Frequency Range		1.7 - 1.9		1.9 - 2.2			GHz
Gain	10	12.5		9	12		dB
Gain Variation Over Temperature		0.012	0.02		0.012	0.02	dB / °C
Input Return Loss		17			18		dB
Output Return Loss		20			25		dB
Output Power for 1dB Compression (P1dB)	26	29		26.5	29.5		dBm
Saturated Output Power (Psat)		29.5			30.5		dBm
Output Third Order Intercept (IP3)	41	44		42	45		dBm
Noise Figure		6.5			6		dB
Supply Current (Icq)		300			300		mA


* Specifications and data reflect HMC461LP3 measured with external baluns in a balanced amplifier configuration optimized for 1.85 - 2.2 GHz per application circuit herein. Contact HMC Applications for 1.7 - 1.85 GHz performance optimization.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.







Broadband Gain & Return Loss



Input Return Loss vs. Temperature




P1dB vs. Temperature




HMC461LP3 / 461LP3E


InGaP HBT 1 Watt High IP3 AMPLIFIER, 1.7 - 2.2 GHz



Output Return Loss vs. Temperature



Psat vs. Temperature




Specifications and data reflect HMC461LP3 measured with external baluns in a balanced amplifier configuration optimized for 1.85 - 2.2 GHz per application circuit herein. Contact HMC Applications for 1.7 - 1.85 GHz performance optimization.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.







Output IP3 vs. Temperature



Power Compression @ 1.95 GHz




Reverse Isolation vs. Temperature







InGaP HBT 1 Watt High IP3 AMPLIFIER, 1.7 - 2.2 GHz



Power Compression @ 2.15 GHz



Gain & Power vs. Supply Voltage @ 2.15 GHz




Specifications and data reflect HMC461LP3 measured with external baluns in a balanced amplifier configuration optimized for 1.85 - 2.2 GHz per application circuit herein. Contact HMC Applications for 1.7 - 1.85 GHz performance optimization.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.






ACPR vs. Supply Voltage @ 1.96 GHz CDMA2000, 9 Channels Forward



HMC461LP3 / 461LP3E


InGaP HBT 1 Watt High IP3 AMPLIFIER, 1.7 - 2.2 GHz

ACPR vs. Supply Voltage @ 2.14 GHz W-CDMA, 64 DCPH



* Source ACPR: All data is RSS corrected for source ACPR. Dashed lines are shown where corrected data is below source ACPR.

Output IP2 vs. Temperature



Absolute Maximum Ratings

+6 Vdc	
+30 dBm	
150 °C	
2.08 W	
31 °C/W	
-65 to +150 °C	
-40 to +85 °C	



ELECTROSTATIC SENSITIVE DEVICE OBSERVE HANDLING PRECAUTIONS

Specifications and data reflect HMC461LP3 measured with external baluns in a balanced amplifier configuration optimized for 1.85 - 2.2 GHz per application circuit herein. Contact HMC Applications for 1.7 - 1.85 GHz performance optimization.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.




HMC461LP3 / 461LP3E

InGaP HBT 1 Watt High IP3 AMPLIFIER, 1.7 - 2.2 GHz



Outline Drawing

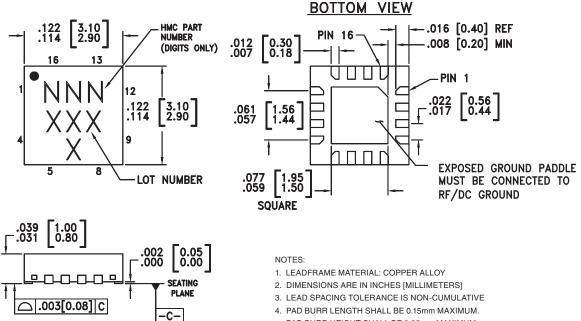

PAD BURR HEIGHT SHALL BE 0.05mm MAXIMUM. 5. PACKAGE WARP SHALL NOT EXCEED 0.05mm.

6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

7. REFER TO HITTITE APPLICATION NOTE FOR SUGGESTED LAND PATTERN.

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[3]
HMC461LP3	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 ^[1]	461 XXXX
HMC461LP3E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	<u>461</u> XXXX

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

Specifications and data reflect HMC461LP3 measured with external baluns in a balanced amplifier configuration optimized for 1.85 - 2.2 GHz per application circuit herein. Contact HMC Applications for 1.7 - 1.85 GHz performance optimization.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent or patent. Trademarks and registered trademarks are the property of their respective owners.



HMC461LP3 / 461LP3E


InGaP HBT 1 Watt High IP3 AMPLIFIER, 1.7 - 2.2 GHz



Pin Descriptions

Pin Number	Function	Description	Interface Schematic	
2, 3, 5 - 8, 10, 11, 13 - 16	N/C	This pin may be connected to RF ground.		
1, 4	IN1, IN2	RF Input. This pin is AC coupled. An off chip series matching capacitor is required.	IN1 c	
9, 12	OUT1, OUT2	RF output and DC Bias for the output stage.		
	GND	Package bottom must be connected to RF/DC ground.		

Recommended Application Circuit for Balanced Amplifier Configuration

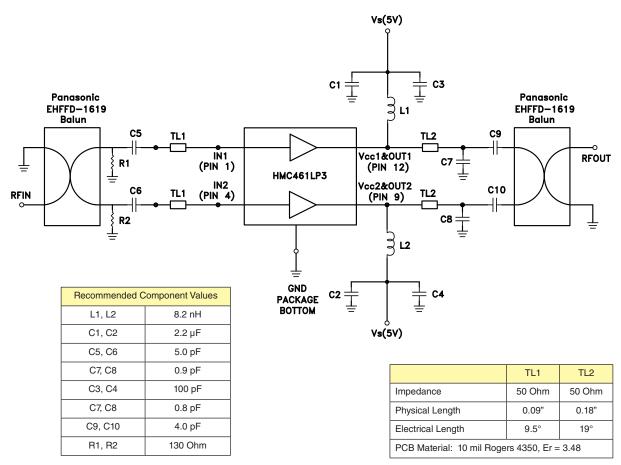

Specifications and data reflect HMC461LP3 measured with external baluns in a balanced amplifier configuration optimized for 1.85 - 2.2 GHz per application circuit herein. Contact HMC Applications for 1.7 - 1.85 GHz performance optimization.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent or patent or ghates. Trademarks and registered trademarks are the property of their respective owners.




HMC461LP3 / 461LP3E

v02.0705

InGaP HBT 1 Watt High IP3 AMPLIFIER, 1.7 - 2.2 GHz



Evaluation PCB

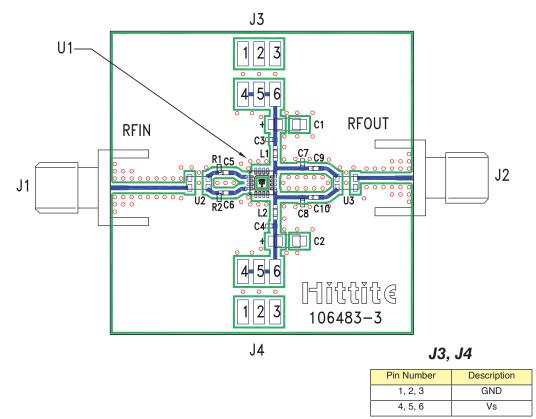

List of Materials for Evaluation PCB 106485 [1]

Item	Description	
J1, J2	PCB Mount SMA Connector	
J3, J4	2 mm DC Header	
C1, C2	2.2 µF Capacitor, Tantalum	
C3, C4	100 pF Capacitor, 0402 Pkg.	
C5, C6	5 pF Capacitor, 0402 Pkg.	
C7, C8	0.8 pF Capacitor, 0402 Pkg.	
C9, C10	4 pF Capacitor, 0402 Pkg.	
L1, L2	8.2 nH Inductor, 0402 Pkg.	
U1	HMC461LP3 / HMC461LP3E Power Amplifier	
U2, U3	Panasonic Balun, P/N EHFFD - 1619	
PCB [2]	106483 Evaluation PCB, 10 mils	

should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

The circuit board used in the final application should use RF circuit design techniques. Signal lines

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350, Er = 3.48

Specifications and data reflect HMC461LP3 measured with external baluns in a balanced amplifier configuration optimized for 1.85 - 2.2 GHz per application circuit herein. Contact HMC Applications for 1.7 - 1.85 GHz performance optimization.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.



HMC461LP3 / 461LP3E

InGaP HBT 1 Watt High IP3 AMPLIFIER, 1.7 - 2.2 GHz

ROHS V EARTH FRIENDLY

Notes:

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Amplifier category:

Click to view products by Analog Devices manufacturer:

Other Similar products are found below :

A82-1 BGA622H6820XTSA1 BGA 728L7 E6327 BGB719N7ESDE6327XTMA1 HMC397-SX HMC405 HMC561-SX HMC8120-SX HMC8121-SX HMC-ALH382-SX HMC-ALH476-SX SE2433T-R SMA3101-TL-E SMA39 A66-1 A66-3 A67-1 A81-2 LX5535LQ LX5540LL MAAM02350 HMC3653LP3BETR HMC549MS8GETR HMC-ALH435-SX SMA101 SMA32 SMA411 SMA531 SST12LP19E-QX6E WPM0510A HMC5929LS6TR HMC5879LS7TR HMC1126 HMC1087F10 HMC1086 HMC1016 SMA1212 MAX2689EWS+T MAAMSS0041TR MAAM37000-A1G LTC6430AIUF-15#PBF SMA70-2 SMA4011 A231 HMC-AUH232 LX5511LQ LX5511LQ-TR HMC7441-SX HMC-ALH310 XD1001-BD-000V