
°C

+105







Ultra Low Profile 0805 Balun 50Ω to 100Ω Balanced

Description

The B0430J50100AHF is a low cost, low profile sub-miniature unbalanced to balanced transformer designed specifically for differential inputs and output locations on next generation A to D and D to A Converter IC's in an easy to use surface mount package, covering 400 MHz–3000 MHz. The B0430J50100AHF is ideal for high volume manufacturing and delivers higher performance than traditional wire wound baluns. The B0430J50100AHF has an unbalanced port impedance of 50Ω and a 100Ω balanced port impedance. This transformation enables single ended signals to be applied to differential ports. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The B0430J50100AHF is available on tape and reel for pick and place high volume manufacturing.

Note that for optimal performance, the B0430J50100AHF should be used with a 10 pF series capacitor on the unbalanced port as shown in p. 2 & 3.

-55

+105


Detailed Electrical Specifications: Specifications subject to change without notice.

		ROOM (25°C)			ROOM (25°C)			
Features:	Parameter	Min.	Тур.	Max	Min.	Тур.	Max	Unit
• 400 – 3000 MHz	Frequency	400		2500	2501		3000	MHz
0.7mm Height Profile50 Ohm to 2 x 50 Ohm	Unbalanced Port Impedance		50			50		Ω
Low Insertion Loss	Balanced Port Impedance		100			100		Ω
Designed for A-D and	Return Loss	8.4	10.3		7	7.3		dB
D-A Converters	Insertion Loss*		1.7	3.0		2.6	4.0	dB
Surface Mountable Tagget 2 Back	Amplitude Balance		0.7	1.4		0.7	1.4	dB
Tape & ReelNon-conductive Surface	Phase Balance		7	12		7	12	Degrees
RoHS Compliant	CMRR		25			25		dB
Halogen Free	Power Handling @85C			0.4			0.4	Watts

-55

Operating Temperature

Outline Drawing

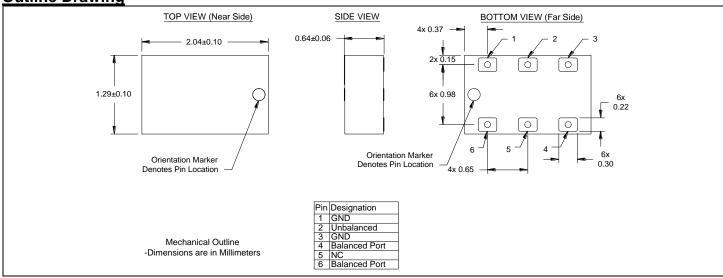




USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392

Asia: +86 512-62749282


^{*} Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)





Typical Performance: 300 MHz. to 3100 MHz. with an external 10 pF capacitor on pin 2

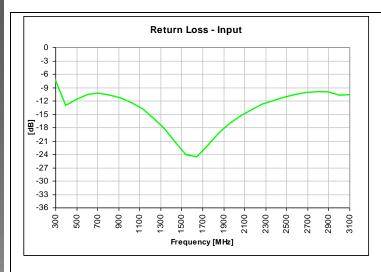




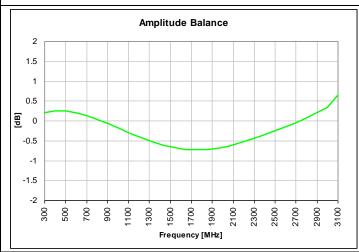

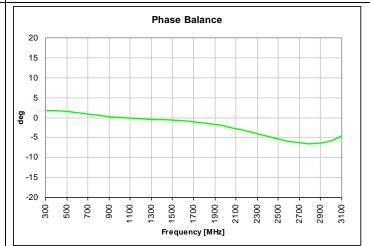

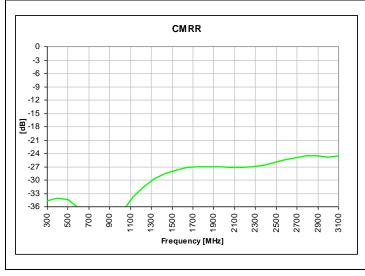

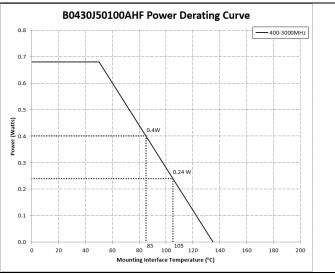



Visit us at www.Anaren.com

USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282




Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.

This component requires a 10 pF capacitor to be mounted in front of the unbalanced port (Pin 2) of the balun as shown in the drawing below for optimum performance. The capacitor should be placed as close as possible to the balun to minimize transmission line effects as shown in the suggested PCB footprint below.

An example of the PCB footprint used in the testing of these parts is shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

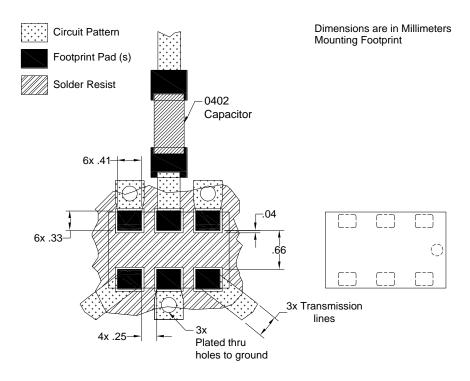




Visit us at www.Anaren.com


USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282



Packaging and Ordering Information

Parts are available in reel and are packaged per EIA 481-D. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel.

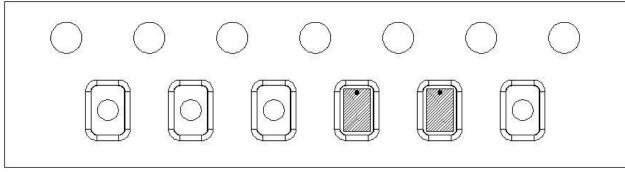



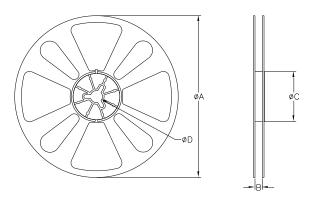


TABLE 1								
QUANTITY/REEL	REEL DIME	NSIONS mm						
	ØΑ	177.80						
4000	В	8.00						
	øС	50.80						
	øD	13.00						

USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Anaren manufacturer:

Other Similar products are found below:

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN B39321R801H210 1A0220-3 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 FM-104-PIN CER0813B MAPDCC0005 3A325 40287 41180 ATB3225-75032NCT BD0810N50100AHF BD2425J50200AHF C5060J5003AHF JHS-115-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 TGL2208-SM, EVAL RF1353C PD0922J5050D2HF 1E1305-3 1G1304-30 B0922J7575AHF 2020-6622-20 TP-102-PIN TP-103-PIN BD1222J50200AHF