



# Ultra Low Profile Halogen Free 0404 Balun 50Ω to 100Ω Balanced

### **Description**

The BD0810N50100AHF is one of the world's smallest and highest performance, halogen free, low profile sub-miniature unbalanced to balanced transformer targeted at the 900MHz ISM bands as well as the low band WCDMA / GSM markets and designed specifically for differential inputs and output locations on modern chipsets in an easy to use surface mount package. The BD0810N50100AHF is ideal for high volume manufacturing and delivers higher performance than traditional ceramic baluns. The BD0810N50100AHF has an unbalanced port impedance of  $50\Omega$  and  $100\Omega$  balanced port impedance. The balanced ports have equal amplitude (-3dB) with 180 degree phase differential. The BD0810N50100AHF is available on tape and reel for pick and place high volume manufacturing.


**IMPORTANT:** This balun must be used with a capacitor across the differential ports as shown on Page 4 to optimize the performance.

Detailed Electrical Specifications: Specifications subject to change without notice.

Features:	• p =	ROOM (25°C)			
• 800 – 1000 MHz	Parameter	Min.	Тур.	Max	Unit
<ul> <li>0.57 mm Height Profile</li> <li>50 Ohm to 2 x 50 Ohm</li> <li>Low Insertion Loss</li> </ul>	Frequency	800		1000	MHz
	Unbalanced Port Impedance		50		Ω
Class leading CMRR	Balanced Port Impedance		100		Ω
• Targeted for WCDMA, GSM,	Return Loss	18	24		dB
<ul> <li>PMR, ULPR &amp; All ISM Protocols</li> <li>Surface Mountable</li> <li>Tape &amp; Reel</li> <li>Non-conductive Top Surface</li> <li>RoHS Compliant</li> </ul>	Insertion Loss*		1.0	1.2	dB
	Amplitude Balance		1.0	1.4	dB
	Phase Balance		5	9	Degrees
	CMRR		24		dB
Halogen Free	Power Handling			0.75	Watts
	Operating Temperature	-55		+85	°C

Insertion Loss stated at room temperature. Values above are for the case with shunt capacitor across differential lines.

### Outline Drawing

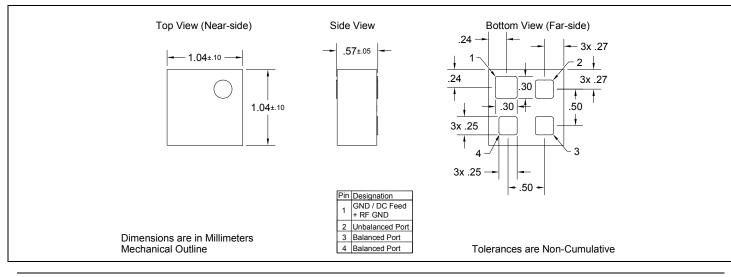




Visit us at www.anaren.com

USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282



## Typical Performance: 700 MHz. to 1100 MHz.

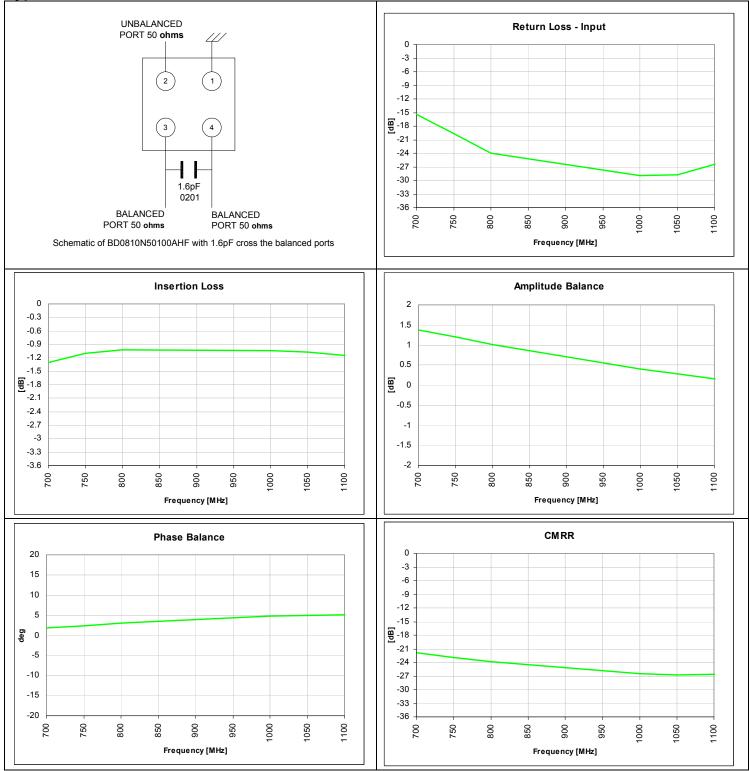




Visit us at www.anaren.com

USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282



# Model BD0810N50100AHF

### Wide Band Performance: 500 MHz. to 8500 MHz.

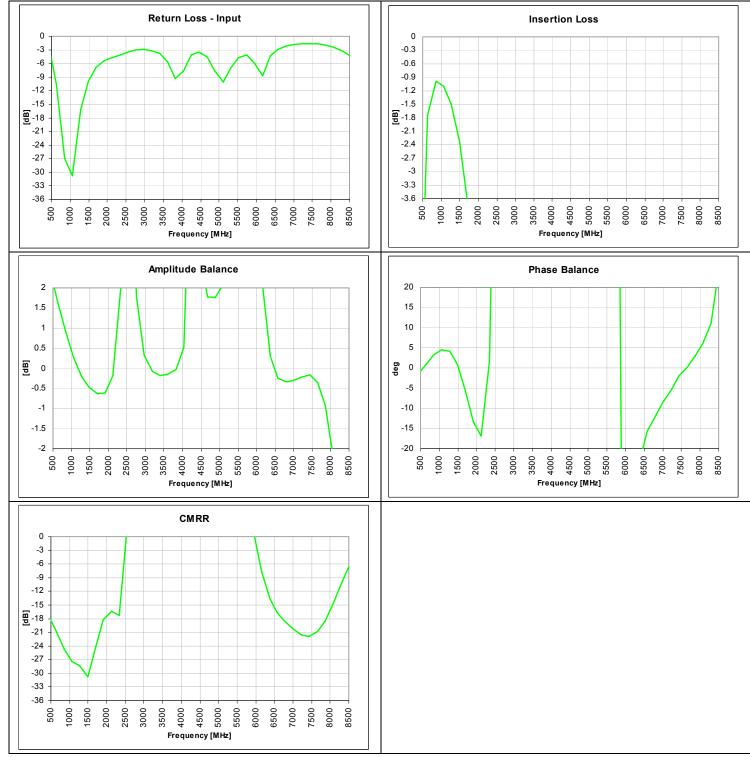






## Mounting Configuration:

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.

An example of the PCB footprint used in the testing of these parts is shown below. Note that the BD0810N50100AHF requires a 0201 size 1.6 pF capacitor across the differential (balanced) lines as shown in the diagram below for the specific case of a 5 mil thick Polyamide substrate. This value may need to be adjusted slightly for different substrate thicknesses and dielectric constants.

For specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

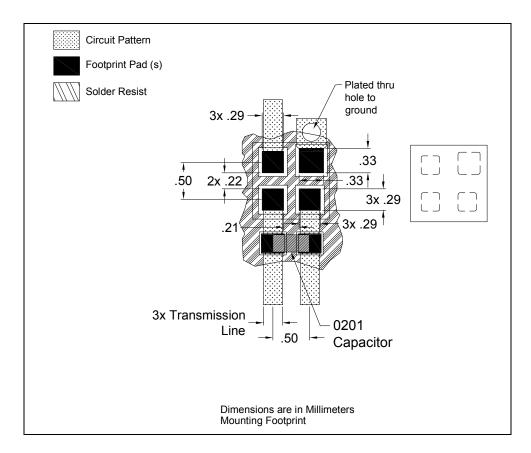





Visit us at www.anaren.com



## Packaging and Ordering Information

Parts are available in reel and are packaged per EIA 481-2. Parts are oriented in tape and reel as shown below. Minimum order quantities are 4000 per reel. See Model Numbers below for further ordering information.

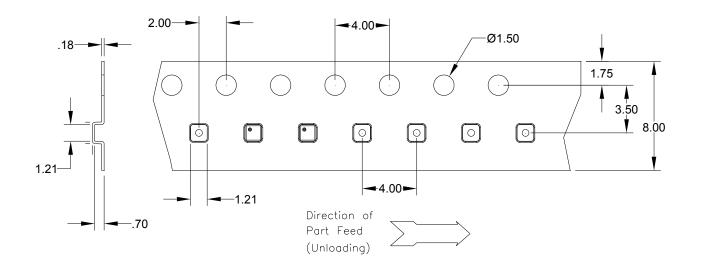

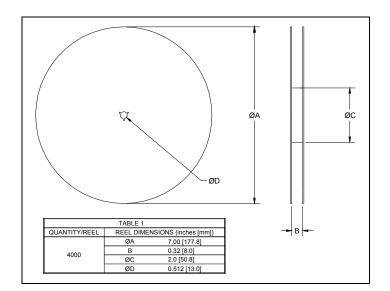



Visit us at www.anaren.com

USA/Canada: (315) 432-8909 Toll Free: (800) 411-6596 Europe: +44 2392-232392 Asia: +86 512-62749282

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Anaren manufacturer:

Other Similar products are found below :

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN B39321R801H210 1A0220-3 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 FM-104-PIN CER0813B MAPDCC0005 3A325 40287 41180 ATB3225-75032NCT BD0810N50100AHF BD2425J50200AHF C5060J5003AHF JHS-115-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 TGL2208-SM, EVAL RF1353C PD0922J5050D2HF 1E1305-3 1G1304-30 B0922J7575AHF 2020-6622-20 TP-102-PIN TP-103-PIN BD1222J50200AHF