






#### **Description**



All of the Xinger components are constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability. All parts have been subjected to rigorous qualification testing and units are 100% RF tested.


**Detailed Electrical Specifications:** Specifications subject to change without notice.

- 2300 2700 MHz
- 0.7mm Height Profile
- WiMax, WiBro, WiFi & ISM
- Low Insertion Loss
- High Isolation
- Surface Mountable
- Tape & Reel
- Non-conductive Surface
- RoHS Compliant
- · Halogen-free

	ROOM (25°C)			
Parameter	Min.	Тур.	Max	Unit
Frequency	2300		2700	MHz
Port Impedance		50		Ω
Return Loss	15	18		dB
Isolation	18	22		dB
Insertion Loss*		0.3	0.4	dB
Amplitude Balance		0.1	0.9	dB
Phase Balance (relative to 90°)		4	8	Degrees
Power Handling @85°C			4	Watts
Power Handling @105°C			2.4	Watts
Operating Temperature	-55		+140	°C

<sup>\*</sup> Insertion Loss stated at room temperature (Insertion Loss is approximately 0.1 dB higher at +85 °C)

#### **Outline Drawing**

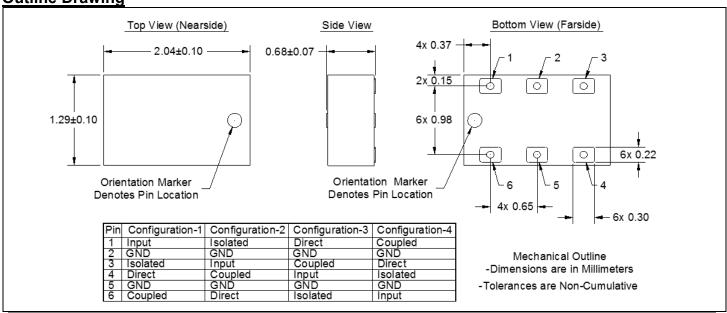





USA/Canada: (315) 233-5510 Toll Free: (833) 389-6402 Europe: +44 2392-232392 Asia: +86 512 62749282





## Typical Broadband Performance: 500 MHz. to 6000 MHz.

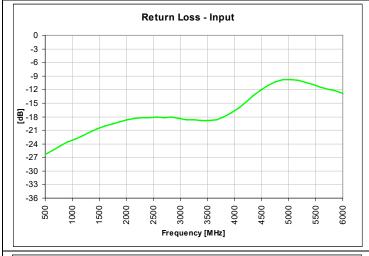



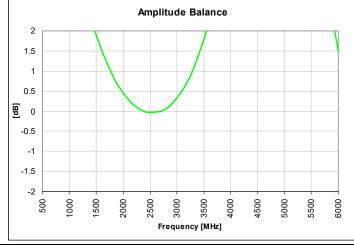

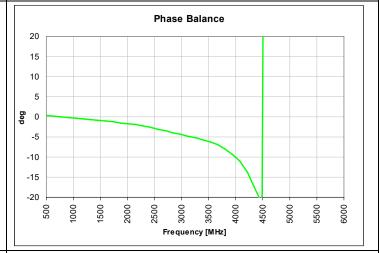

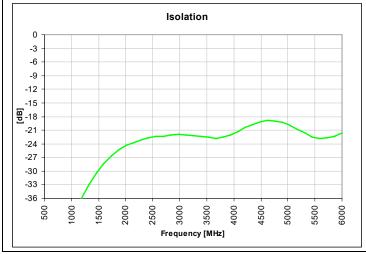









Typical Performance: 2200 MHz. to 2800 MHz.




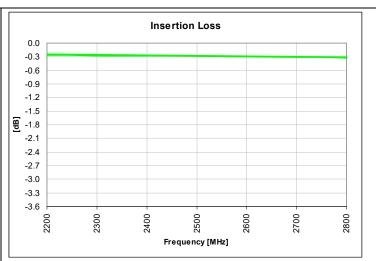

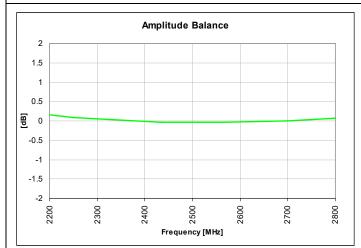

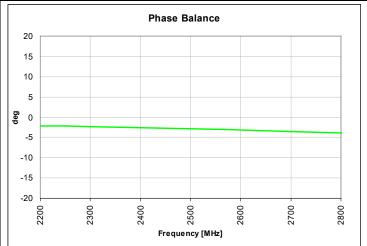

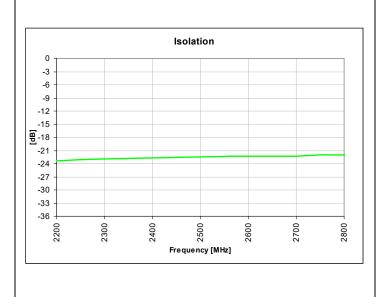

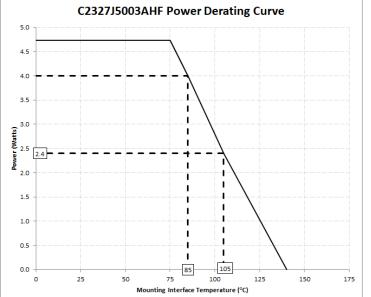

USA/Canada: Toll Free: Europe: Asia: (315) 233-5510 (833) 389-6402 +44 2392-232392 +86 512 62749282



### **Definition of Measured Specifications**

Parameter	Definition	Mathematical Representation i, j, k, m is denoted as the port index of input, isolated, direct and coupled port for specific pin configuration shown in the table
Return Loss	The impedance match of the coupler to a $50\Omega$ system. Return Loss is an alternate means to express VSWR.	$20\log_{10}(\left S_{ii}\right )$
Isolation	The input power divided by the sum of the power at the two output ports.	$20\log_{10}\left S_{ji} ight $
Insertion Loss	The input power divided by the sum of the power at the two output ports.	$10\log_{10}(\left S_{mi}\right ^{2}+\left S_{ki}\right ^{2})$
Amplitude Balance	The difference in power between the two outputs.	$20\log_{10}(\left rac{S_{ki}}{S_{mi}} ight )$
Phase Balance	The difference in phase angle between the two output ports.	$\angle S_{ki} - \angle S_{mi} + 90^{\circ}$

<sup>\*100%</sup> RF test is performed per spec definition for pin configuration 1 and port 1 (input port) is connected to pin1, port 2 (isolated port) is connected to pin 3, port 3 (direct port) is connected to pin 4 and port 4 (isolated) is connected to pin 6.



USA/Canada:

Toll Free:

Europe:

Asia:

(315) 233-5510

(833) 389-6402

+44 2392-232392

+86 512 62749282




#### **Mounting Configuration:**

In order for Xinger surface mount components to work optimally, the proper impedance transmission lines must be used to connect to the RF ports. If this condition is not satisfied, insertion loss, Isolation and VSWR may not meet published specifications.

All of the Xinger components are constructed from organic PTFE based composites which possess excellent electrical and mechanical stability. Xinger components are compliant to a variety of ROHS and Green standards and ready for Pb-free soldering processes. Pads are Gold plated with a Nickel barrier.

An example of the PCB footprint used in the testing of these parts is shown below. In specific designs, the transmission line widths need to be adjusted to the unique dielectric coefficients and thicknesses as well as varying pick and place equipment tolerances.

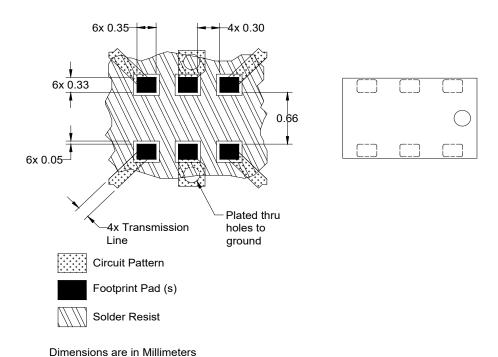



USA/Canada: Toll Free: Europe:

Asia:


(315) 233-5510 (833) 389-6402 +44 2392-232392 +86 512 62749282


Mounting Footprint



#### **Packaging and Ordering Information**

Parts are available in reel and are packaged per EIA 481-D. Parts are oriented in tape and reel as shown below. Minimum order quantities are 10,000 per reel.

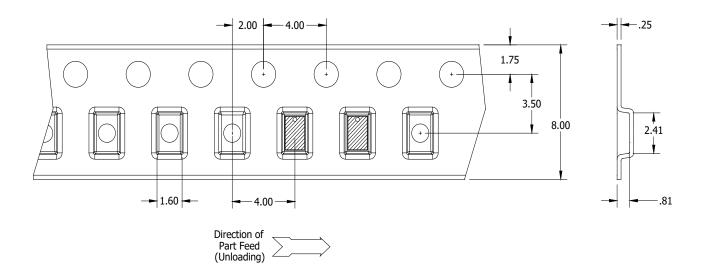

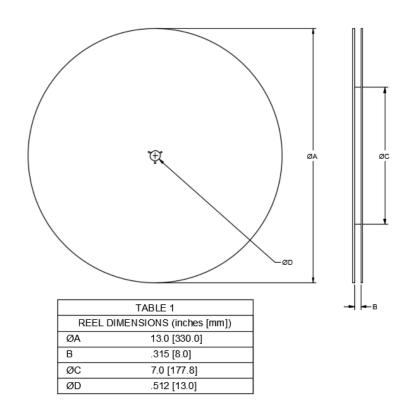



Visit us at www.anaren.com USA/Canada: Toll Free: Europe: Asia:

(315) 233-5510 (833) 389-6402 +44 2392-232392 +86 512 62749282

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Signal Conditioning category:

Click to view products by Anaren manufacturer:

Other Similar products are found below:

MAPDCC0001 MAPDCC0004 PD0409J5050S2HF 880157 HHS-109-PIN DC1417J5005AHF AFS14A30-2185.00-T3 AFS14A35-1591.50-T3 DS-323-PIN B39321R801H210 1A0220-3 JP510S LFB212G45SG8C341 LFB322G45SN1A504 LFL182G45TC3B746 SF2159E 30057 FM-104-PIN CER0813B MAPDCC0005 3A325 40287 41180 ATB3225-75032NCT BD0810N50100AHF BD2425J50200AHF C5060J5003AHF JHS-115-PIN JP503AS DC0710J5005AHF DC2327J5005AHF DC3338J5005AHF 43020 LFB2H2G60BB1C106 LFL15869MTC1B787 X3C19F1-20S XC3500P-20S 10013-20 SF2194E CDBLB455KCAX39-B0 TGL2208-SM, EVAL RF1353C PD0922J5050D2HF 1E1305-3 1G1304-30 B0922J7575AHF 2020-6622-20 TP-102-PIN TP-103-PIN BD1222J50200AHF