

# Inversa LTE Antenna

Part No. SR4L034-L / SR4L034-R

lamiiANT®

**Product Specification** 

#### 1. Features

- Antenna for 4G and 3G applications
- LTE, GSM, CDMA, DCS, PCS, WCDMA, UMTS, HSPDA, GPRS, EDGE, IMT
- Frequencies: 698-960MHz; 1710-2170MHz; 2300-2400MHz; 2500-2690MHz
- Corner placement for ergonomic design-in
- SMD mounted device
- Supplied on Tape and Reel
- Automotive temperature rating.
- Compact 28 x 8 x 3.3 (mm)
- Ideal for MIMO systems

# 2. Description

Inversa is intended for use with 4G/3G applications. As a single antenna or in MIMO systems, this antenna was specifically designed for coexistence and minimal space requirements by being corner placed on the host PCB. This product specification shows the performance of the antenna over all stated frequency ranges.

# 3. Applications

- 4G Mi-Fi Routers
- Medical equipment
- Tablets
- OBD++ systems
- MIMO Systems
- Femtocell / Pico stations
- Remote monitoring



## 4. Part Number

Inversa: SR4L034-L





Inversa: SR4L034-R





## 5. General Data

| Product name                 | Inversa  |  |
|------------------------------|--|--|
| Part Number                  | SR4L034-L / SR4L034-R                                      |  |
| Frequency                    | 698-960MHz<br>1710-2170MHz<br>2300-2400MHz<br>2500-2690MHz |  |
| Polarization                 | Linear   |  |
| Operating temperature        | -40°C to140°C  |  |
| Environmental Condition Test | ISO16750-4 5.1.1.1/5.1.2.1/5.3.2                           |  |
| Impedance with matching      | 50 Ω   |  |
| Weight                       | <2.5g  |  |
| Antenna type                 | SMD  |  |
| Dimensions                   | 28.0 x 8.0 x 3.3 (mm)                                      |  |

## 6. RF Characteristics

|                       | 698 - 798 MHz |
|-----------------------|---------------|
| Peak gain             | 0.40dBi       |
| Average gain (Linear) | -2.0dBi       |
| Average efficiency    | >55%          |
| Maximum return loss   | -6.0dB        |
| Maximum VSWR          | 2.8:1         |

|                       | 824 - 960 MHz |
|-----------------------|---------------|
| Peak gain             | 1.60dBi       |
| Average gain (Linear) | -1.10dBi      |
| Average efficiency    | >70%          |
| Maximum return loss   | -6.6dB        |
| Maximum VSWR          | 2.8:1         |

|                       | 1710 - 2170 MHz |  |
|-----------------------|-----------------|--|
| Peak gain             | 3.50dBi         |  |
| Average gain (Linear) | -2.00dBi        |  |
| Average efficiency    | >60%            |  |
| Maximum return loss   | -5.1dB          |  |
| Maximum VSWR          | 3.5:1           |  |


|                       | 2300 - 2400 MHz |
|-----------------------|-----------------|
| Peak gain             | 3.60dBi         |
| Average gain (Linear) | -1.60dBi        |
| Average efficiency    | >60%            |
| Maximum return loss   | -7.0dB          |
| Maximum VSWR          | 2.5:1           |

|                       | 2500 - 2690 MHz |
|-----------------------|-----------------|
| Peak gain             | 2.10dBi         |
| Average gain (Linear) | -2.30dBi        |
| Average efficiency    | >55%            |
| Maximum return loss   | -4.9dB          |
| Maximum VSWR          | 3.7:1           |


All data measured on Antenova's evaluation PCB Part No. SR4L034-EVB-1

## 7. RF Performance

# 7.1 Return Loss

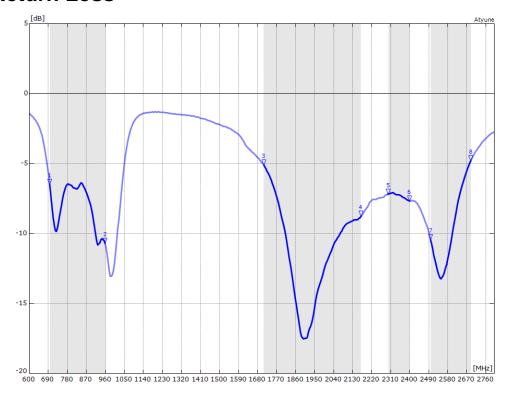


# **7.2 VSWR**

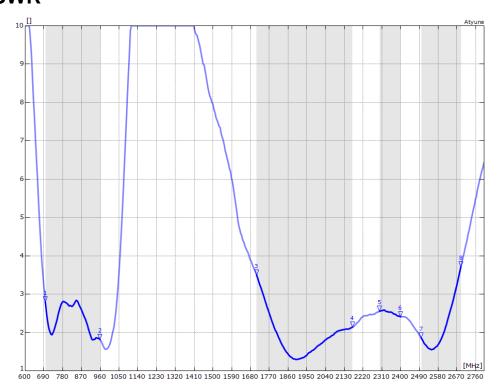


## 7.3.0 Antenna Pattern

698 MHz - 798 MHz

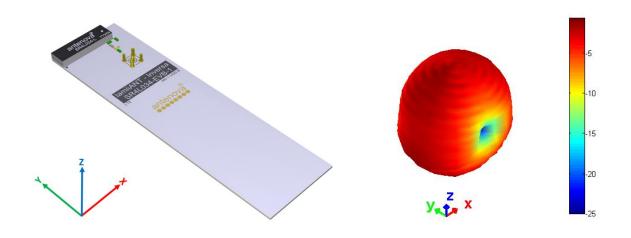


**3D pattern at 746 MHz**Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)

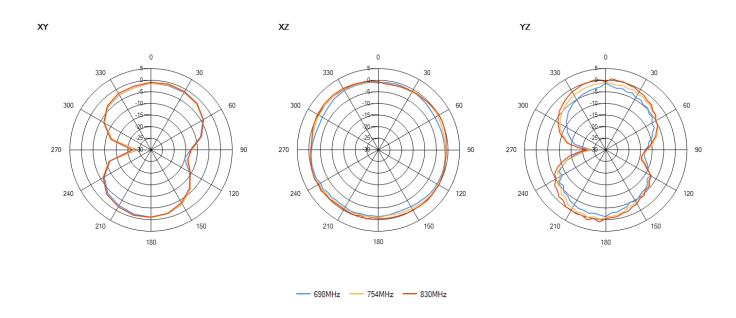


### 7.3.1 Antenna Pattern

824 MHz - 960 MHz

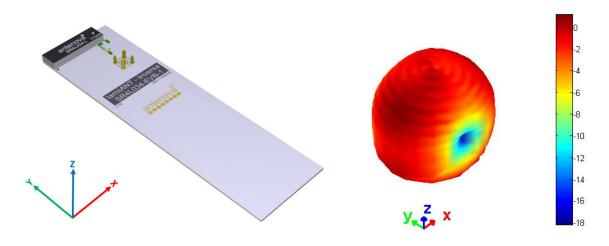


**3D pattern at 880 MHz**Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)

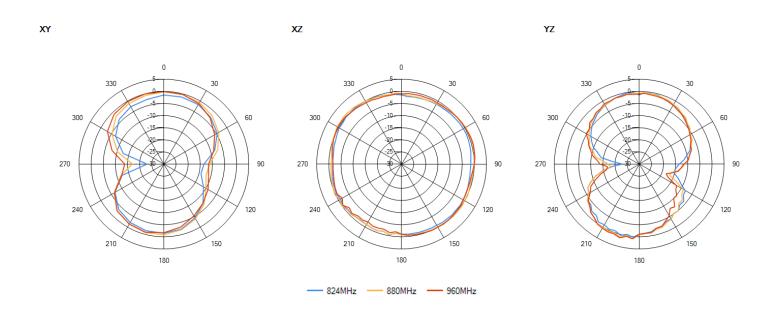


## 7.3.2 Antenna Pattern

1710 MHz - 2170 MHz

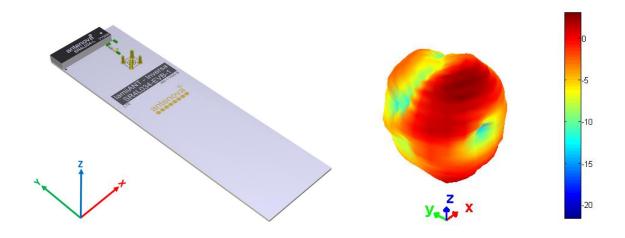


3D pattern at 1990 MHz
Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)

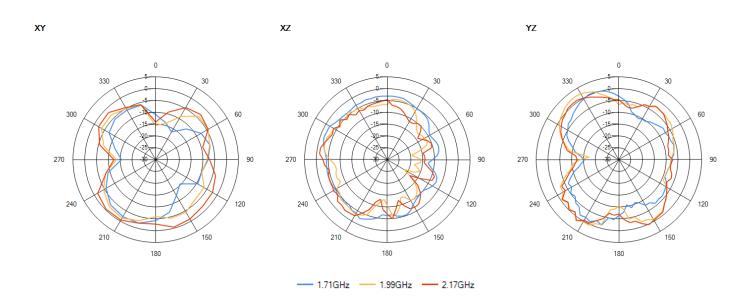


## 7.3.3 Antenna Pattern

### 2300 MHz - 2400 MHz

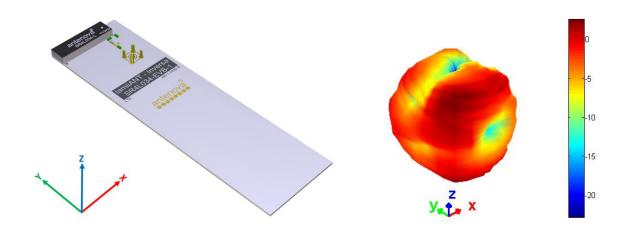


**3D pattern at 2.35 GHz**Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)

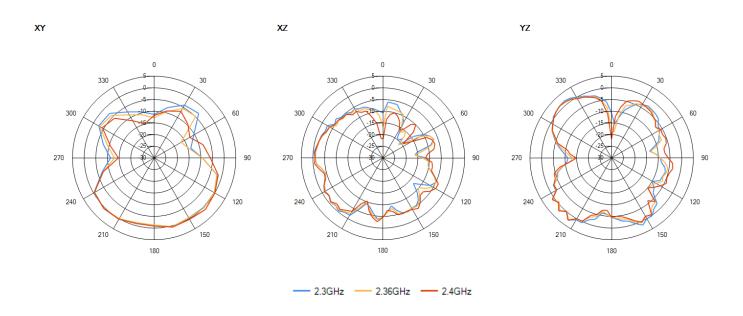


## 7.3.3 Antenna Pattern

## 2500 MHz - 2690 MHz

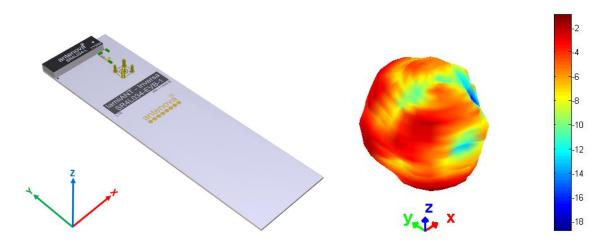


**3D pattern at 2.6 GHz**Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)

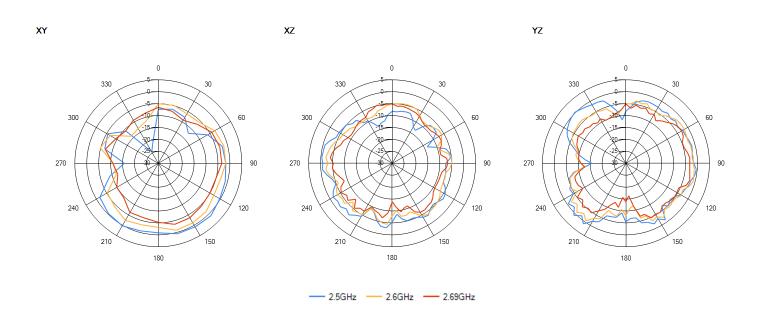

# 7.4 Host PCB Length Vs. Efficiency

The efficiency of Inversa is shown here over varying GND plane lengths.

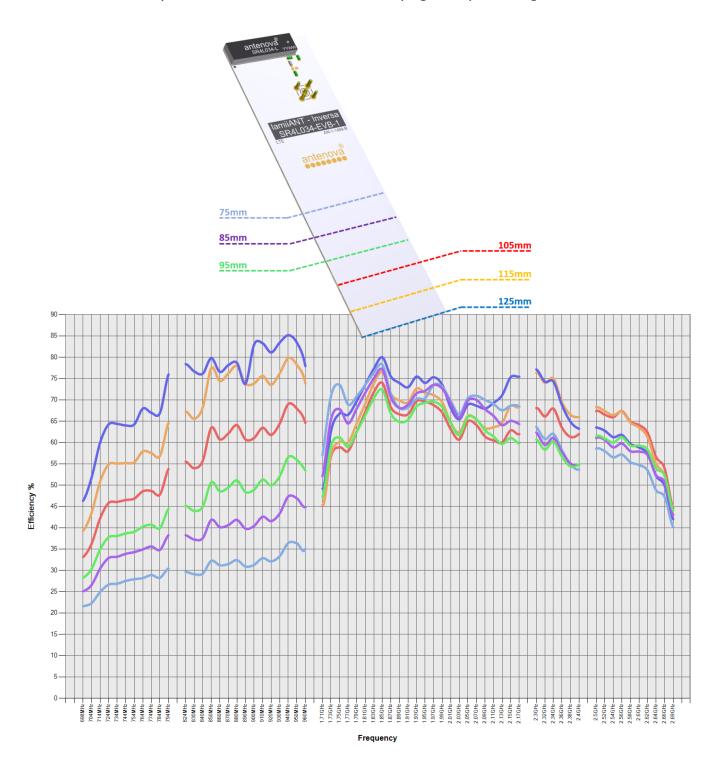

## 8. Antenna Dimensions







All Dimensions in (mm)
-L and -R Dimensions are the same

| L         | W        | Н             |
|-----------|----------|---------------|
| Length    | Width    | Height        |
| 28.0 ±0.1 | 8.0 ±0.1 | 3.3 +0.1 -0.0 |

#### Bottom Side SR4L034-L

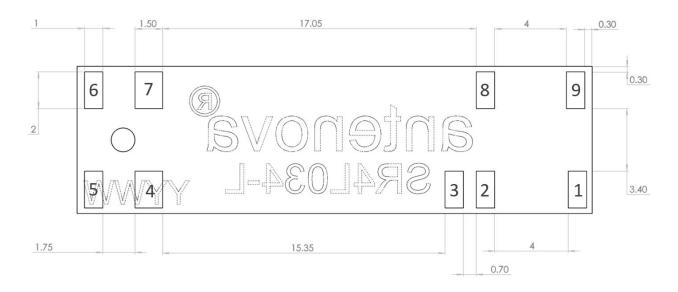

#### Bottom Side SR4L034-R

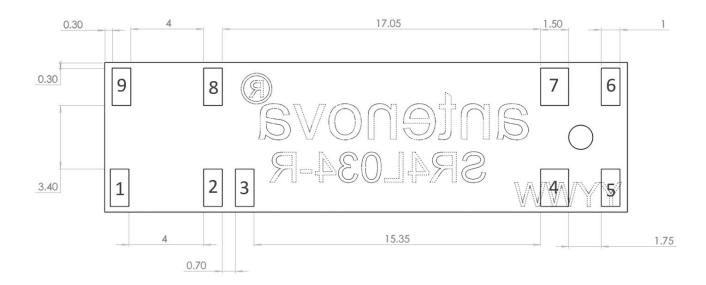


- All Dimensions in (mm)
- View from underneath each antenna

# 9.1 Schematic symbol and Pin definition


The circuit symbol for the antenna is shown below.

| Pin       | Name | Description                            |  |
|-----------|------|--|--|
| 4         | Feed | Transceiver port                       |  |
| 5         | T1   | Return/Tuning                          |  |
| 1,6,7,8,9 | NC   | Not used (Mechanical only)             |  |
| 2,3       | SC   | Pins 2 and 3 short circuit on host PCB |  |

Inversa Schematic Symbol

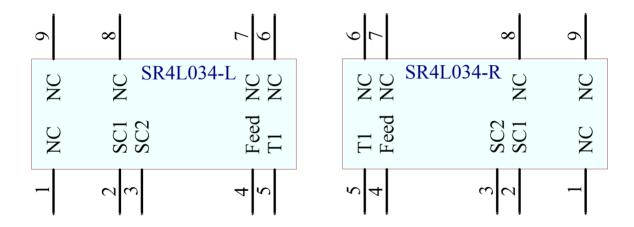

# 10.0 Antenna footprint

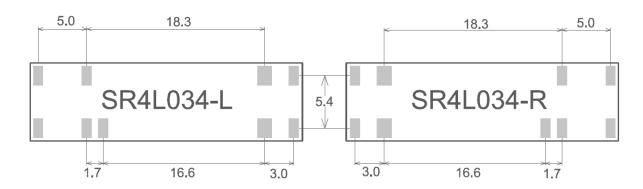


ALL DIMENSIONS IN MM

PADS 1,2,3,5,6,8,9 = 2.0 X 1.0 (MM) PADS 4,7 = 2.0 X 1.5 (MM)

# 10.1 Host PCB Layout

The footprint and clearance of the host PCB must be designed-in as below.

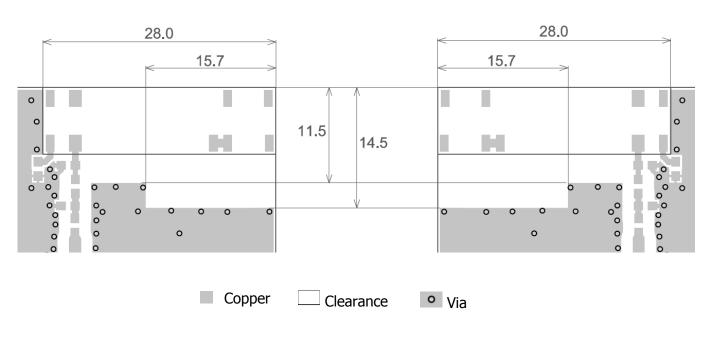

ALL DIMENSIONS IN MM

#### 11. Electrical Interface

#### 11.1 Transmission Line


All transmission lines should be designed to have a characteristic impedance of  $50\Omega$ .

- The length of the transmission lines should be kept to a minimum.
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50  $\Omega$ .

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the track, so the characteristic impedance of the coplanar transmission is  $50~\Omega$ .

# 11.2 Matching Circuit

The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to six components, the following circuit should be designed into the host PCB. Not all of the components may be required, but they should be included as a precaution. The matching network must be placed close to the antenna feed to ensure it is more effective in tuning the antenna.

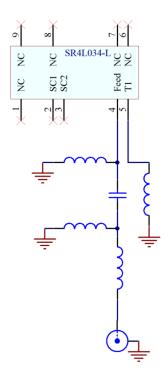


# 12.0 Antenna Integration Guide


#### 12.1 Antenna Placement

The antenna should ideally be placed on the host PCB using one of the two configurations below.

#### 1) Horizontal placement

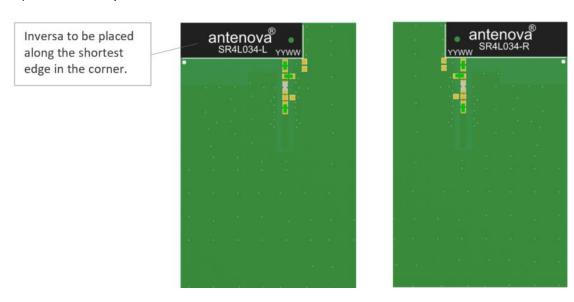

### 2) Vertical placement

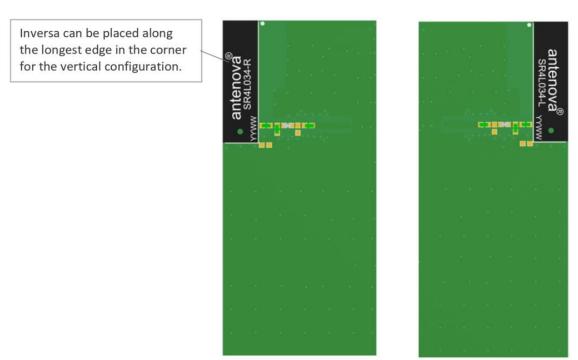


**Note:** Vertical placement optimal minimum GND length required is ≥100mm


# **12.2 Diversity Placement**

For a Diversity solution, use 2 x Inversa antennas on the same host PCB. For all configurations the distance between them should be  $\geq 15$ mm

Please note: It is still advisable to consult Antenova before building the PCB for additional checking of the layout and device.

#### **Proximity configurations**






R-L

L-L






R-R

## **Opposed configurations**

**L-R** 

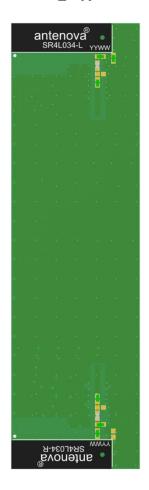


L - L



## 12.3 Isolation


The Isolation vs. Distance from Main to Diversity. 40mm, 25mm and 20mm are shown for comparison.

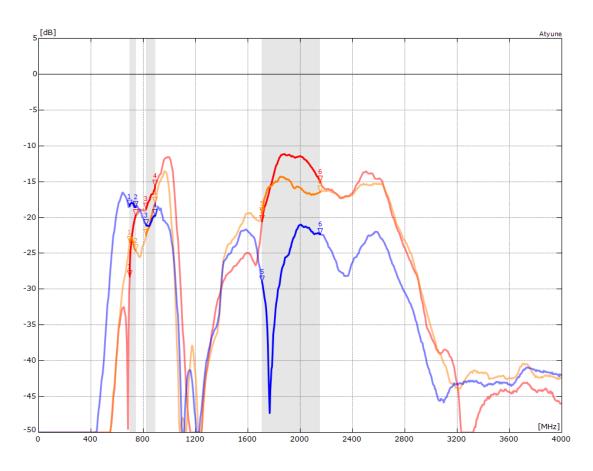

| MARKERS:  | MHz    | dB        | MHz    | dB     | MHz     | dB     |
|-----------|--------|-----------|--------|--------|---------|--------|
| ISOLATION | 20MM.9 | 52P - S21 |        |        |         |        |
|           | 1: 698 | -28.22    | 3: 824 | -18.77 | 5: 1710 | -20.48 |
|           | 2: 746 | -19.70    | 4: 894 | -15.54 | 6: 2155 | -15.00 |
| ISOLATION | 25MM.9 | S2P - S21 |        |        |         |        |
|           | 1: 698 | -23.46    | 3: 824 | -22.45 | 5: 1710 | -19.45 |
|           | 2: 746 | -24.57    | 4: 894 | -17.91 | 6: 2155 | -16.42 |
| ISOLATION | 40MM.9 | 52P - S21 |        |        |         |        |
|           | 1: 698 | -18.39    | 3: 824 | -21.06 | 5: 1710 | -28.92 |
|           | 2: 746 | -18.50    | 4: 894 | -19.68 | 6: 2155 | -22.25 |

# 12.4 Radiation Pattern Diversity

The radiation pattern for SR4L034-EVB-2 Diversity example is shown below for each antenna on two different bands.

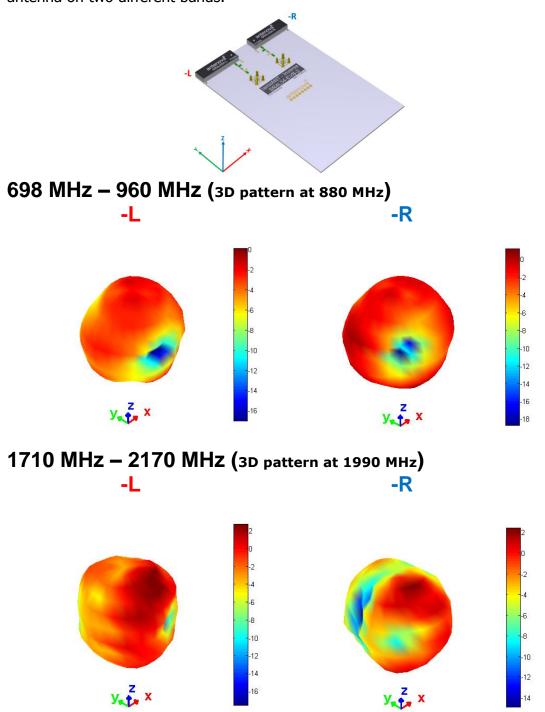



Drag to rotate pattern and PCB by using Adobe Reader (Click to Activate)

# 12.5 Component Distance Rule

While it is ideal to keep the antenna away from metal objects and other PCB components, it is possible to have components around the antenna. No set distance is set and it varies depending on the height of the component. So rather than setting a defined distance a rule can be given. An 8° projection line can be drawn from the base of the antenna. This can then be used to decide the distance a component can be.

The example below shows a USB connector placed using this rule. Once it is within the 8° limit the distance is known.

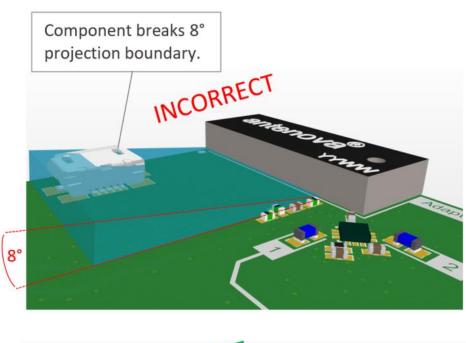


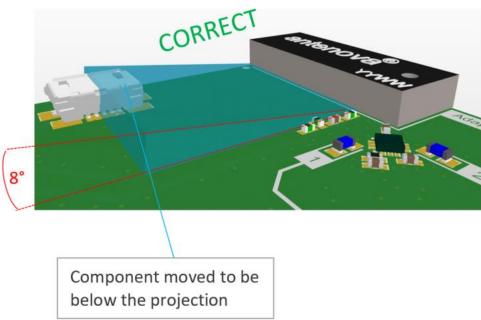

# 13.0 Antenna Active Tuning for Smaller GND planes

For a host PCB with a length less than 75mm is it suggested to use an active tuning circuit to overcome the BW reduction seen with smaller GND. This can be implemented on a single antenna or diversity solution. An Antenova EVB kit is available with this circuit (SR4L034-EVB-3).


The SR4L034-EVB-3 evaluation PCB uses a simple RF switching circuit to select between two component values on the RTN (Pin5). In this kit the RF switch used is a Peregrine PE423422.

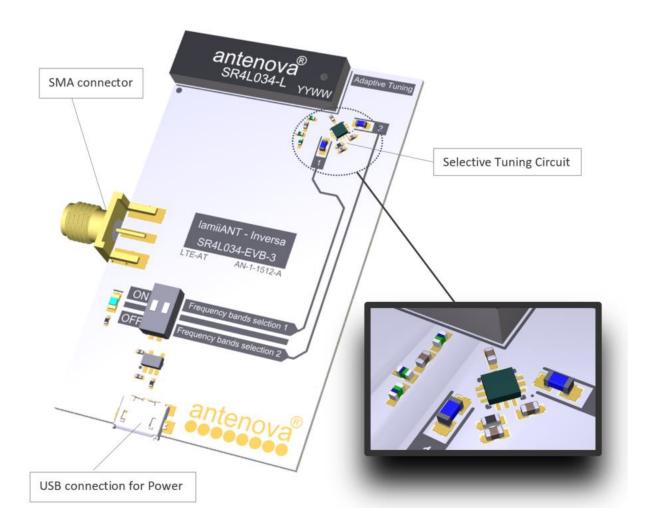

 $SR4L034-EVB-3 = 65 \times 40 (mm)$ 

# 13.1 Antenna Active Tuning Circuit

Reference circuit using the Peregrine PE423422. The input matching circuit and L4 and L5 values are dependent on the host PCB/Device.

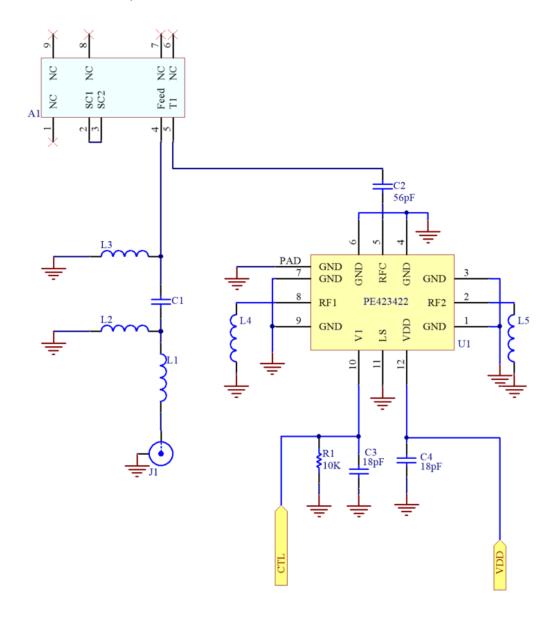

| Designator  | Туре             | Value    | Description         |
|-------------|------------------|----------|---------------------|
| U1          | RF Switch        | PE423422 | Peregrine RF SPDT   |
| R1          | Resistor         | 10K      | Pull Down           |
| C3, C4      | Capacitor        | 18pF     | De-coupler          |
| C2          | Capacitor        | 56pF     | DC-Block            |
| L4,L5       | Tuning Cap / Ind | -        | Dependant on Device |
| L1,L2,C1,L3 | Matching         | -        | Dependant on Device |


# 13.2 Antenna Active Tuning Circuit Performance

The SR4L034-EVB-3 was tested in the following configuration:

1 = 698-746MHz; 1710-2155MHz 2 = 824-960MHz; 1710-2155MHz

|                       | 698 - 746 MHz | 824 - 960 MHz |
|-----------------------|---------------|---------------|
| Peak gain             | -2.5dBi       | -1.0dBi       |
| Average gain (Linear) | -4.2dBi       | -2.8dBi       |
| Average efficiency    | >30%          | >35%          |
| Maximum return loss   | <-4.2dB       | <-4.1dB       |
| Maximum VSWR          | 4.0:1         | 3.9:1         |

# 13.3 Return Loss

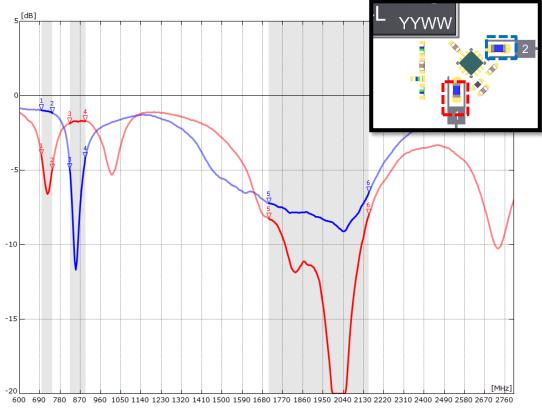

### 14.0 Reference Board

The reference board has been designed for evaluating the SR4L034-L antenna. It includes an SMA female connector.




SR4L034-EVB-1 Evaluation Board

To order a reference board contact <a href="mailto:sales@antenova-m2m.com">sales@antenova-m2m.com</a>. Please state if a single antenna or two antenna EVB is required.

# 14.1 SR4L034-EVB-1 Matching Circuit


The reference board has been designed for evaluating SR4L034 and includes an SMA female connector.

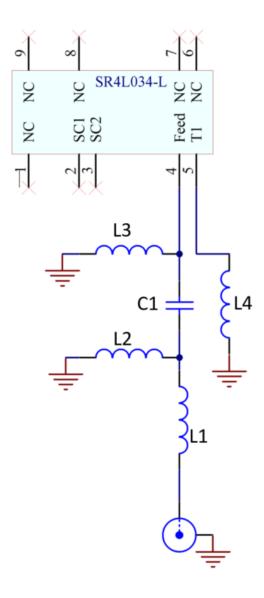

| Designator | Туре      | Value | Description    |
|------------|-----------|-------|----------------|
| L1         | Resistor  | 0R    | Non - Specific |
| L2         | Inductor  | 22nH  | Murata LQG15HN |
| C1         | Capacitor | 1.8pF | Murata GJM15   |
| L3         | Inductor  | 39nH  | Murata LQG15HN |
| L4         | Inductor  | 6.8nH | Murata LQG15HN |


# 14.2 Diversity EVB Active Tuning EVB

Two more versions of the Inversa evaluation board are available. Please contact Antenova for more information.

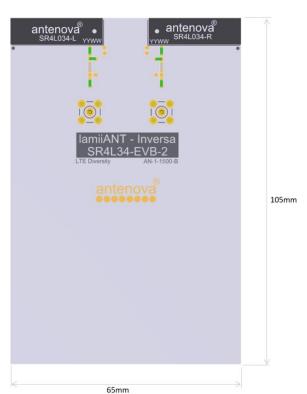

SR4L034-EVB-2 (Diversity Example)

### **SR4L034-EVB-3 (Active Tuning Solution)**



To order a reference board contact <a href="mailto:sales@antenova-m2m.com">sales@antenova-m2m.com</a>. Please state if a single antenna or two antenna EVB is required.

# 15. Soldering

This antenna is suitable for lead free soldering.

The reflow profile should be adjusted to suit the device, oven and solder paste, while observing the following conditions:

- The maximum temperature should not exceed 240 °C.
- However, for lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

# 16. Hazardous Material Regulation Conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova M2M's website.


# 17. Packaging

# 17.1 Optimal Storage Conditions

| Temperature   | -10°C to 40°C   |  |
|---------------|---|--|
| Humidity      | Less than 75% RH  |  |
| Shelf life    | 24 Months   |  |
| Storage place | Away from corrosive gas and direct sunlight                                 |  |
| Packaging     | Reels should be stored in unopened sealed manufacturer's plastic packaging. |  |

Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in above table.

# 17.2 Tape Characteristics

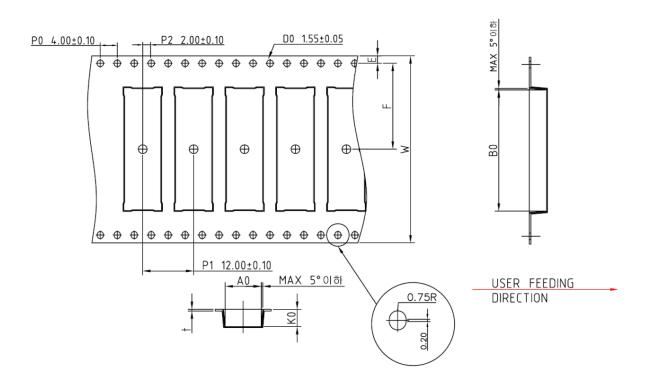

|   | Ко         | Ao             | Во              | P0             | P1              | P2             |
|---|------------|----------------|-----------------|----------------|-----------------|----------------|
| 4 | 1.10 ± 0.1 | $8.50 \pm 0.1$ | $28.50 \pm 0.1$ | $4.00 \pm 0.1$ | $12.00 \pm 0.1$ | $2.00 \pm 0.1$ |


| E          | F            | W           | t               |
|------------|--------------|-------------|-----------------|
| 1.75 ± 0.1 | 20.20 ± 0.15 | 44.00 ± 0.3 | $0.30 \pm 0.05$ |

Dimensions in mm

#### Notes:

- 1) 10 sprocket hole pitch cumulative tolerance ±0.2
- 2) Camber not to exceed 1mm in 100mm
- 3) Ao and Bo measured on a plane 0.1mm above the bottom of the pocket
- 4) Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier


# 17.3 Reel Dimensions

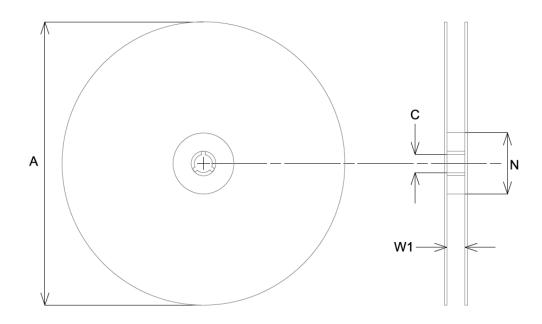

| Α           | С          | N           | W1       |
|-------------|------------|-------------|----------|
| 330.0 ± 2.0 | 13.0 ± 0.5 | 178.0 ± 0.2 | 45 ± 0.3 |

All dimensions in mm

### 17.4 Box Dimensions




| Length<br>(L) | Width<br>(W) | Thickness (T) |
|---------------|--------------|---------------|
| 350mm         | 340mm        | 65mm          |

Т

# 17.5 Bag Properties

Reels are supplied in protective plastic packaging.

#### 17.6 Reel Label Information

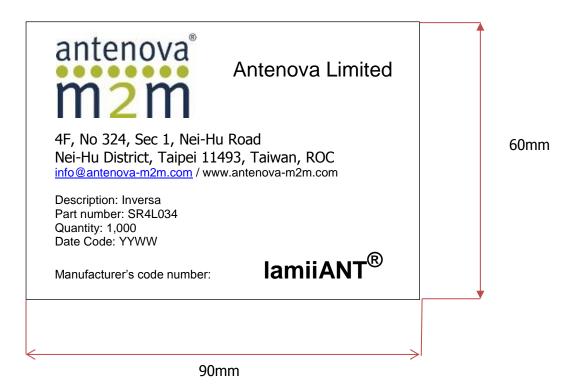



www.antenova-m2m.com

#### **Corporate Headquarters**

Antenova Limited 2<sup>nd</sup> Floor Titan Court 3 Bishop Square Hatfield AL10 9NA UK

Tel: +44 1223 810600

Email: sales@antenova-m2m.com

#### **North America Headquarters**

Antenova Limited 100 Brush Creek Road Suite 103, Santa Rosa California 95404, USA

Tel: +1 707 890 5202

Email: sales@antenova-m2m.com

#### **Asia Headquarters**

Antenova Asia Limited 4F, No. 324, Sec. 1, Nei-Hu Road Nei-Hu District Taipei 11493 Taiwan, ROC

Tel: +886 (0) 2 8797 8630 Fax: +886 (0) 2 8797 6890

Email: sales@antenova-m2m.com

Copyright® Antenova Ltd. All Rights Reserved. Antenova ®, Antenova M2M ®, gigaNOVA ®, the Antenova product family names, and the Antenova and Antenova M2M logos are trademarks and/or registered trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of printing. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within this information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



Certificate No. 11070 ISO 9001

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antenna Development Tools category:

Click to view products by Antenova manufacturer:

Other Similar products are found below:

0868AT43A0020-EB1SMA EVALBGSA141MN10TOBO1 A10393-U1 PCSD.06.A B5771-U1 KIT-LTE-GNSS-01 KIT-WIFI-ISM-01 A10472-U1 REFLECTOR-EVB-1 A10340-U1 ACAG0201-2450-EVB ACAG0301-15752450-EVB ACAG0301-1575-EVB ACAG0301-2450-EVB ACAG0301-2450-EVB ACAG0301-15752450-EVB ACAG0301-1575-EVB ACAG0301-SW2-EVB ACAR3005-C2WB-EVB ACAR3005-S824-EVB ACAR3705-S698-EVB ACAR4008-S698-EVB A10137-D A10194-U1 A10204-U1 A5645H-EVB-1 A5645-U1 A5887H-EVB-1 A6111-U1 M20057-EVB-1 SR42W001-U1 SR42W009-U1 SR4G013-U1 SR4G053-EVB-1 SR4L034-EVB-3 SR4L049-EVB-1 SRC5G027-U1 SRCW004-U1 1001312-01 M310220-01 M620720-01 M830120-01 M830520-01 EB\_NN01-105A EB\_NN02-201-5G CCKLTE450-NA AEK-GNCP-TH258L15 MPA-104- KIT