

## Armata 3G FPC Antenna

Part No. SRFC011

flexiiANT ®

Product Specification

#### 1. Features

- Antenna for 3G applications including MIMO systems.
- GSM850, GSM900, DCS1800, PCS1900, WCDMA2100
- Small form factor, only 30.0 x 28.5mm
- 1.13mm diameter RF cable with IPEX MHF connector
- Self-adhesive mounted
- Quick and simple integration minimizes design cycle
- Available in 3 standard cable lengths
- Suited to smaller devices such as ODBII

#### 2. Description

Armata is intended for use with 3G applications. Suited for small devices with limited space. Designed to work with small host PCB's while still maintaining full coverage of the 3G bands. This product specification shows the performance of the antenna to cover a typical penta-band reception: GSM850/900/1800/1900 and WCDMA.

## 3. Applications

- ODBII units
- Femto / Pico base stations
- Small Tracker devices
- Remote monitoring
- Machine to Machine communication



#### 4. Part Number

#### Armata: SRFC011



#### 5. General Data

| Product name            | Armata                    |
|-------------------------|---------------------------|
| Part Number             | SRFC011                   |
| Frequency               | 824-960MHz; 1710-2170MHz  |
| Polarization            | Linear                    |
| Operating temperature   | -40°C to 85°C             |
| Impedance with matching | 50 Ω                      |
| Weight                  | < 0.5 g                   |
| Antenna type            | FPC Self-adhesive 3M 468P |
| Dimensions (Antenna)    | 30 x 28.5 x 0.15 (mm)     |
| Connection              | IPEX                      |


## 6. **RF Characteristics**

|                     | 824 – 960 MHz | 1710 – 1990 MHz | 2110 – 2170 MHz |
|---------------------|---------------|-----------------|-----------------|
| Peak gain           | 2.46dBi       | 4.06dBi         | 3.89dBi         |
| Average gain        | -3.79dBi      | -2.59dBi        | -2.21dBi        |
| Average efficiency  | >40%          | >55%            | >60%            |
| Maximum return loss | -6.0dB        | -8.0dB          | -12.0dB         |
| Maximum VSWR        | 2.90:1        | 2.20:1          | 1.60:1          |


All data measured in a loaded condition adhered to a plastic carrier free space.

#### 7. RF Performance

#### 7.1 Return Loss

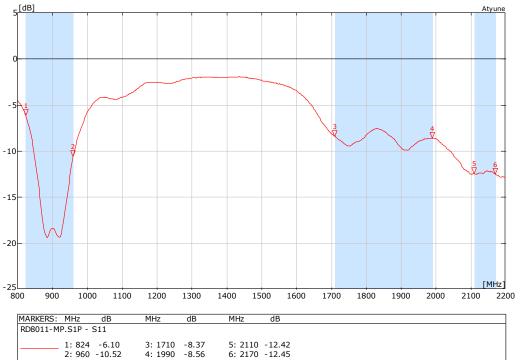


#### 7.2 **VSW**R

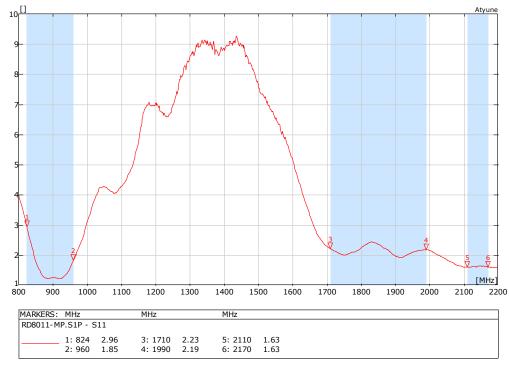


#### 7.3 Antenna patterns

#### 7.3.1 824 MHz – 960 MHz

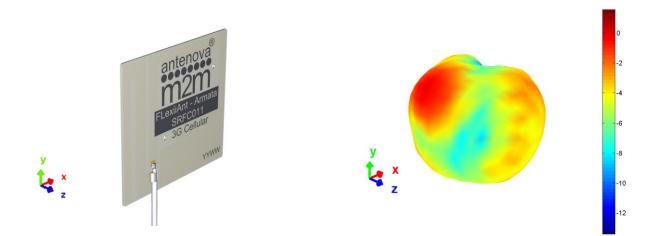


**3D pattern at 890 MHz** Drag to rotate pattern and PCB by using Adobe Reader (Click to Activate)

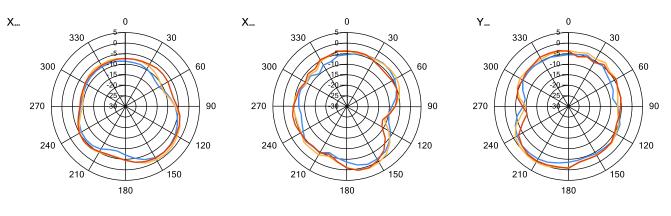


Antennas for Wireless M2M Applications

Product Specification PS SRFC011-1.0

#### 7.3.2 1710 MHz – 2170 MHz

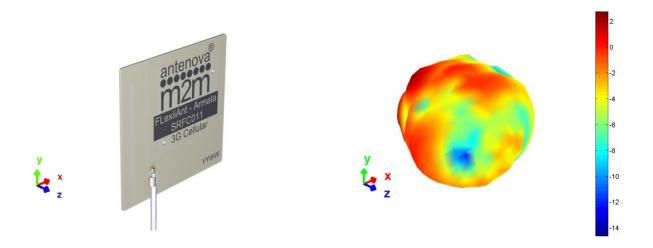


**3D pattern at 1950 MHz** Drag to rotate pattern and PCB by using Adobe Reader (Click to Activate)

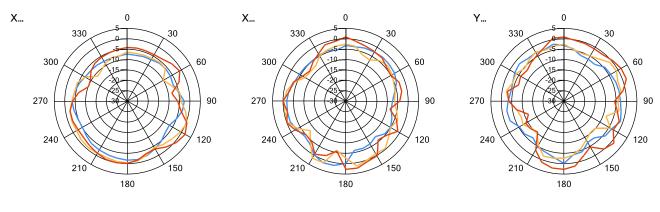

— 1.71GHz — 1.95GHz — 2.17GHz

#### 8. Antenna Dimensions


#### 8.1 Dimensions FPC section



| L              | W              | Т                 |
|----------------|----------------|-------------------|
| Length         | Width          | Thickness         |
| 30.0 ±0.2 (mm) | 28.5 ±0.2 (mm) | 0.15 (mm) nominal |


All dimensions in mm

## 8.2 Dimensions assembled

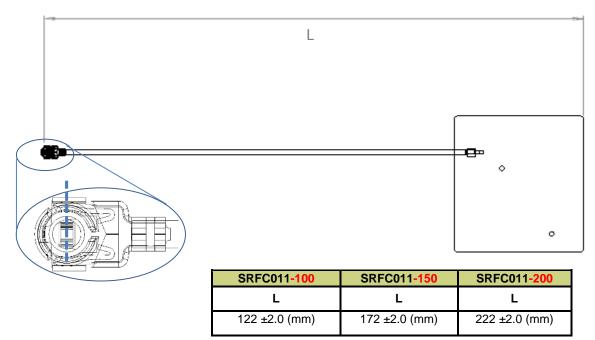


## 8.3 IPEX Connector

|    | I-PEX    |              |
|----|----------|--------------|
|    | Material | Copper Alloy |
|    | Plating  | Ag           |
|    |          |              |
| nt | Side     | Ba           |

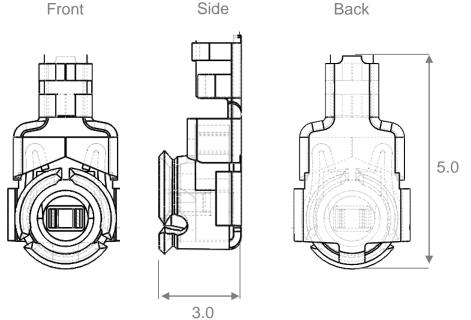

All dimensions in mm

8.4 Assembly

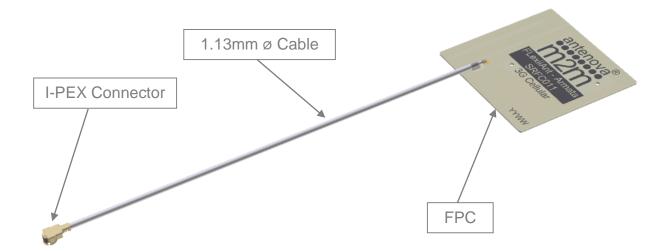

#### 9. Electrical Interface

#### 9.1 Host Interface

The host PCB requires the mating connector which is IPEX MHF (UFL) receptacle. The location should be close to the chip/modules pin for the RF. Any feed from this receptacle should be maintained at  $50\Omega$  impedance.

#### 9.2 Transmission Line

All transmission lines should be designed to have a characteristic impedance of  $50\Omega$ .

• The length of the transmission lines should be kept to a minimum


• Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50  $\Omega$ 

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the feed.

A DC blocking capacitor should be placed in line to protect the RF front end.

#### **10. Mechanical Fixing**

The antenna uses 3M 468MP adhesive on the reverse side of the FPC. The antenna has an easy access split line to peel off to reveal the adhesive side. It is designed for a one time fix to a clean smooth surface.

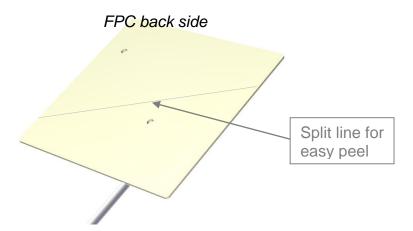


#### **10.0 Antenna Integration Guide**

#### **10.1 Placement**

For placing the FPC antenna within a device, the host PCB size is not a factor like with PCB mounted antennas. However placement still needs to follow some basic rules, as any antenna is sensitive to its environment.

Using six spatial directions shown below as a guide. The antenna FPC section should try to maintain a minimum of three directions free from obstructions to be able to operate effectively. The other directions will have obstacles in their paths, these directions still require a minimum clearance. These minimum clearances are further defined in this section. The plastic case is not included in this, only metal objects/components that will obstruct or come in close proximity to the antenna.

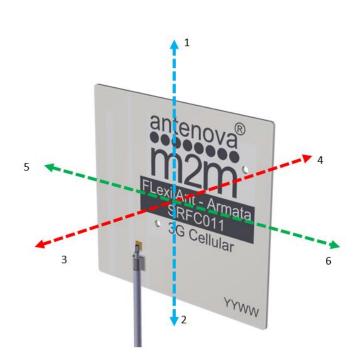


Six spatial directions relative to FPC

#### **10.2 Orientation of FPC**

The orientation of the FPC with respect to the host PCB should be defined depending on the unit. The proximity of the GND will have an influence on the antenna so the PCB location relative to the antenna should be considered.

The FPC will normally be placed in one of the three following options for orientation. In each option a distance (d) is the critical dimension to consider. Below shows the minimum value of (d) for each. Other obstructions may increase this dimension.

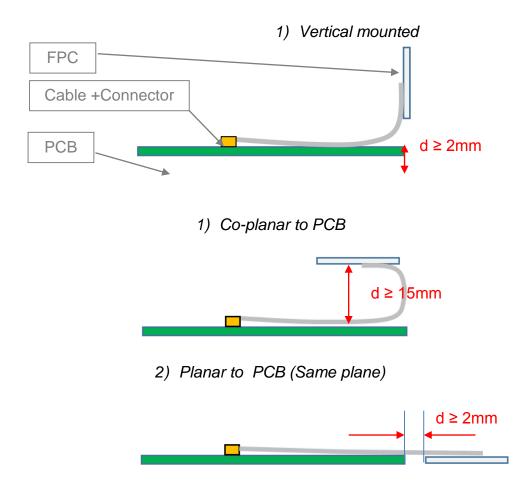


#### 10.3 Host PCB size

SRFC011 is designed specifically for smaller devices. The host PCB size has a large effect on the performance. It is recommended for the host PCB to be <1600mm<sup>2</sup>. Any PCB which is larger is advised to use Antenova SRFC025 as a suitable cellular FPC.

#### **10.4 Device Integration example**

An example of integration within an ODBII unit is shown below. A simplified design highlights the antenna's integration. The FPC is shown adhered to the inside of the device's plastic housing. The length of the cable is sufficient to allow ease of assembly when produced (SRFC011-100).

Due to the limited internal space the FPC is adhered between two surfaces. The maximum allowable distance between the FPC and the PCBs is maintained.

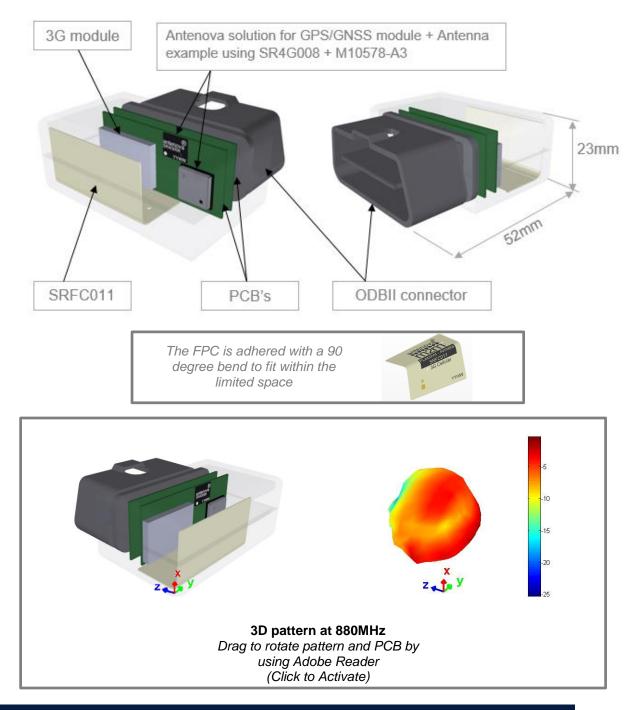


#### **11. Hazardous Material Regulation Conformance**

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova M2M's website.

#### 12. Packaging

The antennas are stored in individual plastic (PE) bags. Then stored within a second bag of 10pcs.

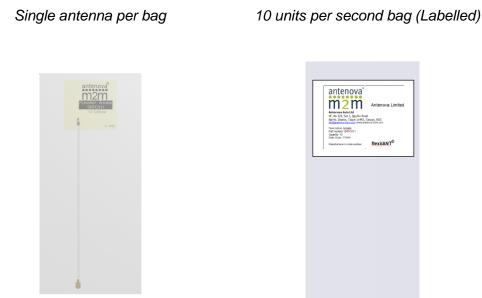

#### **12.1 Optimal Storage Conditions**

| Temperature   | -10°C to 40°C  |
|---------------|--|
| Humidity      | Less than 75% RH   |
| Shelf life    | 18 Months  |
| Storage place | Away from corrosive gas and direct sunlight                                    |
| Packaging     | Antennas should be stored in unopened sealed manufacturer's plastic packaging. |

#### **12.2 Label Information**

| antenova®   |         |
|---|---------|
| M2M Antenova Limited  | 1       |
| Antenova Asia Ltd<br>4F, No 324, Sec 1, Nei-Hu Road<br>Nei-Hu District, Taipei 11493, Taiwan, ROC<br>info@antenova-m2m.com/www.antenova-m2m.com | 60.00mm |
| Description: Armata<br>Part number: SRFC011<br>Quantity: 10<br>Date Code: YYWW  |         |
| Manufacturer's code number: <b>flexiiANT</b> <sup>®</sup>   |         |
| <u> </u>  |         |

90.00m

#### Armata Part No. SRFC011

# antenova<sup>®</sup> m2nn

www.antenova-m2m.com

#### **Corporate Headquarters**

Antenova Limited 2<sup>nd</sup> Floor Titan Court 3 Bishop Square Hatfield AL10 9NA UK

Tel: +44 1223 810600 Email: <u>sales@antenova-m2m.com</u>

#### North America Headquarters

Antenova Limited 100 Brush Creek Road, Suite 103 Santa Rosa California 95404 USA

Tel: +1 707 890 5202 Email: sales@antenova-m2m.com

#### **Asia Headquarters**

Antenova Asia Limited 4F, No. 324, Sec. 1, Nei-Hu Road Nei-Hu District Taipei 11493 Taiwan, ROC

Tel: +886 (0) 2 8797 8630 Fax: +886 (0) 2 8797 6890 Email: sales@antenova-m2m.com

Copyright® Antenova Ltd. All Rights Reserved. Antenova ®, Antenova M2M ®, gigaNOVA ® and the Antenova product family names and the Antenova and Antenova M2M logos are trademarks and/or registered trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of printing. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within this information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antennas category:

Click to view products by Antenova manufacturer:

Other Similar products are found below :

 GAN30084EU
 930-033-R
 GW17.07.0250E
 1513563-1
 EXE902SM
 APAMPG-117
 MAF94383
 W3908B0100
 W6102B0100
 YE572113 

 30RSMM
 108-00014-50
 66089-2406
 SPDA17RP918
 A09-F8NF-M
 A09-F5NF-M
 RGFRA1903041A1T
 W3525BW100
 W3593B0100

 W3921B0100
 SIMNA-868
 SIMNA-915
 SIMNA-433
 W1044
 W1049B090
 A75-001
 WTL2449CQ1-FRSMM
 CPL9C
 EXB148BN
 0600 

 00060
 TRA9020S3PBN-001
 GD5W-28P-NF
 MA9-7N
 GD53-25
 GD5W-21P-NF
 EXB144SM
 C37
 MAF94051
 GD35-17P-NF
 P1744

 MA9-5N
 EXD420PL
 B1322NR
 QWFTB120
 MAF94271
 MAF94300
 GPSMB301
 FG4403
 AO-AGSM-OM54
 5200232
 MIKROE-2349