


Revision level		Revision Record		Changed	Date	Approved	Date
Part	Drawing						
	01	UNIQUE NUMBERING SYSTEM COLUMN WAS GROUP ORDER No UNS ADDED BEFORE NUMBER.		ALOMAX	20/06/01	S.BENTICK	20/06/01
	02	(T18L) 1.5 to 50 WAS 1.5 to 55		ALOMAX	17/10/01	S.BENTICK	17/10/01

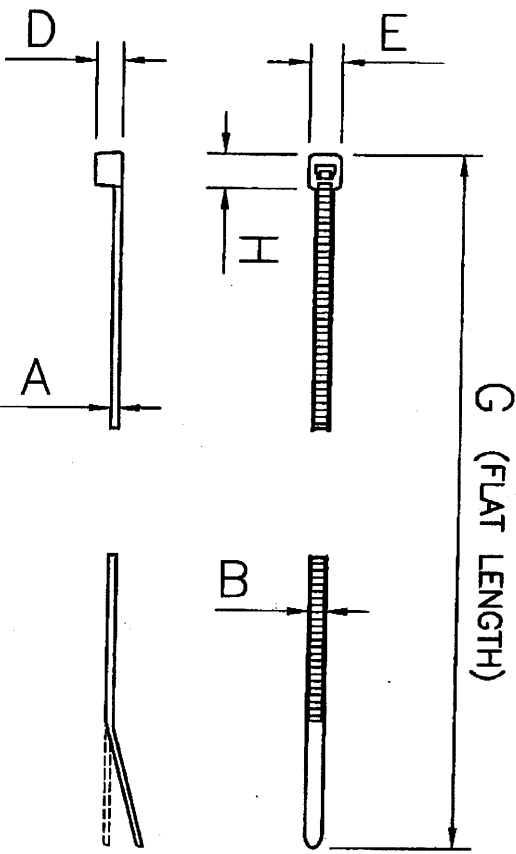

Unique Numbering System	Product Code	Cable Range (mm)	A	B	D	E	G	H
UNS 111-028	T18S	1.5 to 16	0.95 ± 0.2	2.3 ± 0.2	3.2 ± 0.3	4.2 ± 0.3	83.0 ± 5.0	4.5 ± 0.5
UNS 111-019	T18R	1.5 to 22	1.0 ± 0.2	2.45 ± 0.2	3.7 ± 0.3	4.45 ± 0.5	100.0 ± 5.0	4.8 ± 0.5
UNS 111-023	T18I	1.5 to 35	1.1 ± 0.1	2.5 ± 0.15	3.8 ± 0.5	4.5 ± 0.5	144.0 ± 6.0	4.8 ± 0.5
UNS 111-021	T18L	1.5 to 50	1.1 ± 0.1	2.5 ± 0.1	3.9 ± 0.5	4.5 ± 0.5	202.0 ± 5.0	4.8 ± 0.5

Material P.A. 66  
 Dimension without tolerances details to:

DIN 16901

Tolerances

PERFORMANCE SPECIFICATION

ACAD



The copyright of this drawing is reserved by HELLMANN TYTON. It is issued on condition that it is not reproduced, copied or disclosed to a third party, either wholly or in part, without the consent of HELLMANN TYTON.

Drawn: ALOMAX 4/02/00  
 Approved: S.BENTICK 4/02/00

Scale: 1:1  
 Title: T18 SERIES

**Hellermann Tyton**  
 Network Products Group  
 Stanton Green Business Park,  
 Monkshead M22 4TY.  
 Tel: 0161 945 4181  
 Fax: 0161 947 2228

Drawing-No

CD1218-02




Format A4

Sheet 1 of 1

# HellermannTyton

- Manufacture a full range of quality cable ties in a wide variety of materials, colours, styles and sizes
- Our cable ties are used in many other fastening applications and are engineered and manufactured for maximum performance and quality
- Whatever your application, please refer to the easy to use cable tie guide below for the correct material

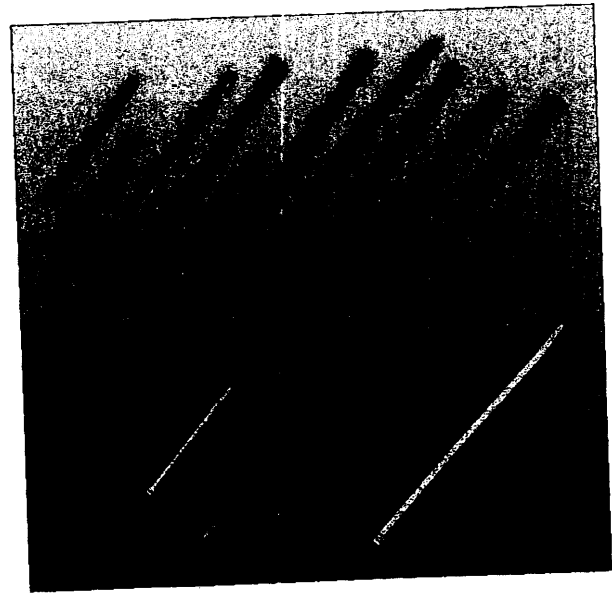

## Cable Tie Guide

	Order Suffix	Ultra Violet Resistant	Low Temperature	High Temperature	Flammability Rating (UL94)	Melting Point
Standard Nylon 6.6	N/A	Poor	- 40°C	+ 85°C	V2	265°C
Weather Resistant Nylon 6.6	- W	Good	- 40°C	+ 85°C	V2	265°C
Flame Retardant Nylon 6.6	- V0	Poor	40°C	+ 85°C	V0	265°C
Heat Stabilised Nylon 6.6	- HS	Low	- 40°C	+ 105°C	V2	265°C
Hi-Temp Nylon 4.6	- HR	Poor	- 40°C	+ 135°C	V2	295°C
Stainless Steel	N/A	V. Good	- 80°C	+ 538°C	VTM - V0 (Coating)	N/A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Wire Identification](#) category:*

*Click to view products by [Hellermann](#) manufacturer:*

Other Similar products are found below :

[CU6337-000](#) [CU6342-000](#) [FCA-410-12](#) [11631010](#) [1-1768037-1](#) [1-1768037-2](#) [1-1768050-0](#) [PXLK-VI](#) [Q62184-1](#) [A64304-000](#) [QMT221](#)  
[HK032WE1NF038B](#) [1330-0519-10](#) [1395199-1](#) [1395200-1](#) [1395202-1](#) [DMVF050WE-300S6](#) [D-SCE-1K-2.4-50-4-CS7834](#) [1538738-1](#)  
[E90935-000](#) [EC1238-000](#) [EC1465-000](#) [EC1855-000](#) [EC1859-000](#) [EC1863-000](#) [EC5415-000](#) [EC7277-000](#) [EC7352-000](#) [EC7603-000](#)  
[EC7707-000](#) [EC7735-000](#) [EC7768-000](#) [EC7828-000](#) [EC7854-000](#) [EC7952-000](#) [EC8128-000](#) [1768037-8](#) [1768041-7](#) [NC-127191-10-9](#)  
[HS048WE2NF038B](#) [C03232-000](#) [HTCM-SCE-14-4H-9](#) [HTMS-3/16-9](#) [HT-SCE-1/4-2.0-4](#) [HT-SCE-3/16-2.0-4](#) [HTTMS-1/2-1.50-9](#) [HTTMS-](#)  
[CM-1/2-4H-9](#) [HX-SCE-19.0-50-9](#) [HX-SCE-6.4-50-4](#) [C25254-000](#)