


ARDUINO.CC OPEN-SOURCE ELECTRONICS PLATFORM

ARDUINO GATEWAY WITH LORA CONNECTIVITY, IS THE DOOR TO ENTER INTO THE LORA WORLD. DISCOVER THE ENDLESS POSSIBILITIES OF THE GATEWAY AND THE ARDUINO CREATE PLATFORM

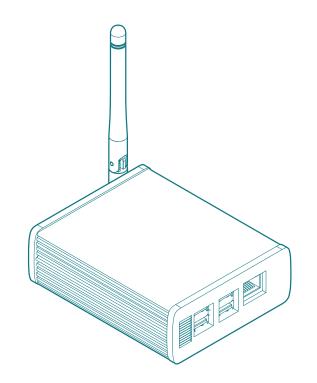

The Arduino gateway kit provides LoRa (Long Range) connectivity using ultra-long range and high interference immunity on the 868 MHz radio bands.

The gateway offers up to 8 LoRa Channels in the 868Mhz frequency allowing it to receive up to 8 LoRa packets simultaneously making it the ideal device to use in LoRaWAN gateways applications.

It is designed around the SX1301 from Semtech, which enables robust connection between the gateway and a massive amount of wireless end-points spread over a very wide range of distances. It has the Listen Before Talk capability. When enabled, the device monitors channels continuously and transmits only if the channel is free. It's the perfect companion of the Arduino MKR WAN 1300 . Installation, provisioning and remote management the Gateway are made incredibly simple through the our Arduino Create platform.

This gateway enables people to leverage the LoRa connectivity in many use cases:

TECH SPECS

•AUTOMATED METER READING •ENVIRONMENTAL MONITOR •SMART CITIES •HOME AND BUILDING AUTOMATION •WIRELESS ALARM AND SECURITY SYSTEM •INDUSTRIAL MONITORING AND CONTROL •LONG RANGE IRRIGATION SYSTEM •AGRICULTURAL MONITORING


•LORA GATEWAY CAPE ADAPTER •CHIPSET •OPERATING VOLTAGE •CURRENT CONSUMPTION •MODULATION •OPERATING FREQUENCY •OPERATING TEMPERATURE •RF OUTPUT POWER •SENSITIVITY

5V 815MA (TX@+27DBM); 600MA (RX) LORA® SPREAD SPECTRUM, FSK, GFSK 868MHZ (EU) -40°C TO +85°C UP TO +27DBM **UP TO -137DBM**

FEATURES:

•LISTEN BEFORE TALK (LBT) CAPABILITY •ON-BOARD UFL ANTENNA •8 LORA CHANNELS •FPGA SUPPORTS LORA SPECTRAL SCAN

ASSEMBLY AND **SETUP INSTRUCTIONS:**

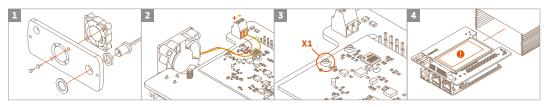

1. Insert the SD card then attach the fan as shown in 3. Connect the SMA pigtail to the XI antenna clips as shown in the image above.

the picture then screw together the enclosure panel connector. 4. Insert the boards into the enclosure with the SMA pigtail. 2. Wire the Fan cables with the Important: make sure to take note of the code from the sticker on the radio module, before placing it inside the enclosure (you'll need it later).

1 Arduino Radio Module Adapter

1 AC power adapter (with multi plug)

1 Micro UFL to SMA Pigtail


KIT BOX INCLUDES 1 Aluminium Enclosure 1 Raspberry Pi 3 model B+

1 LoRa® Radio module

1 Ethernet cable

1 SMA Antenna 1 MicroSD card

1 Fan

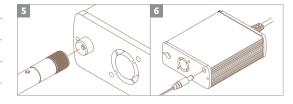

5. Connect the antenna. 6. Plug-in the power supply and the Ethernet Cable.

7. Visit: CREATE.ARDUINO.CC/GETTING-STARTED/LORAGW

Follow the instructions and enter the code you noted in the 4. You're all set! Welcome to the LoRa® world!

For further info, visit:


STORE.ARDUINO.CC/ARDUINO-PRO-GATEWAY



WHAT'S IN YOUR ARDUINO PRO GATEWAY?

Raspberry Pi

3 model B+

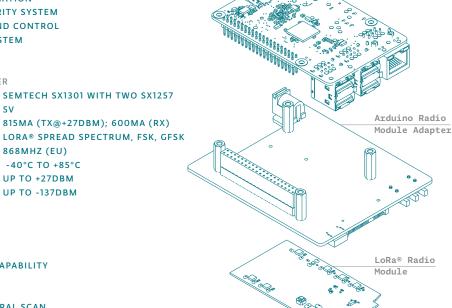

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Gateways category:

Click to view products by Arduino manufacturer:

Other Similar products are found below :

 BB-SG30000324-51
 MTCDT-LEU1-247A-915-EU-GB-AU
 MTCDTIP-LEU1-275L-868
 MTCDT-LEU1-246A-868-EU-GB
 WOP-2000G

 N2AE
 ESRP-PCS-ECU1251
 BB-SG30300525-42
 BB-SG30500520-42
 1120730001
 SGX5150202US
 SGX5150102US
 RG191
 UPS-EDGE

 X70864-U01
 UPS-EDIOT-X70864-UW01
 ADAM-4572-CE
 ADAM-6717-A
 ECU-1152-R11ABE
 EKI-1224-CE
 EKI-1224CI-CE
 ICR-3201

 ICR-3201-W
 ICR-3211B
 ICR-3241
 UNO-220-P4N1AE
 UNO-2271G-W1032GE
 WISE-3310-D100L1E
 WISE-3610ILS-51A1N
 WISE

 6610-E100-A
 WISE-6610-N100-A
 AKX00016
 MESR901
 MESR902T
 X2-Z11-EM-A
 X2-HMU-EM-B
 X4-Z1U-B101-A
 SGX5150020US

 SGX5150225US
 SGX51501M2ES
 SGX51502N5ES
 XPC240200B-02
 XPC240400B-02
 XPC240100S-02
 XPC240200S-02
 XPC240400S-02

 XPE200100S
 WSDA-2000
 WSDA-200-USB
 1120780001
 1120780002
 MTCDT-246A-868-EU-GB