### **Data Sheet**

# **DDS Function Generators**

## Models 4007B and 4013B



Models 4007B and 4013B are versatile DDS (direct digital synthesis) sweep function generators with high signal precision and stability. These instruments generate sine and square waveforms up to 7 MHz or 12 MHz, including triangle waveforms up to 1 MHz. Both models provide variable output voltages from 0 to 10 Vpp into 50 ohms or up to 20 Vpp into open circuit. A continuously variable DC offset allows the output to be injected directly into circuits at the correct bias level.

These models are suitable for education and other applications that need basic DDS function generators with sweep capability.


#### **Features & Benefits**

- Sine and square waveforms up to 12 MHz
- Bright easy-to-read display
- Linear and logarithmic sweep
- Variable DC offset
- Adjustable duty cycle (square)
- Store and recall up to 9 instrument settings
- Output On/Off button
- Overvoltage, overcurrent, and short circuit protection on main output

Model	4007B	4013B
Sine and square frequency range	0.1 Hz - 7 MHz	0.1 Hz - 12 MHz
Triangle frequency range	0.1 Hz - 1 MHz	

### Intuitive user interface

Easily change all waveform parameters using the intuitive menu-driven front panel keypad, control knob, and easy-to-read LCD. Convenient waveform and range selection buttons let users make quick and precise adjustments.

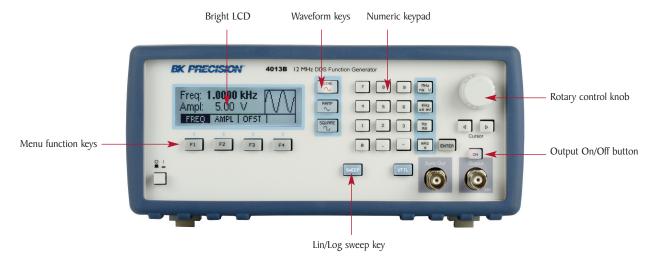



Specifications	4007B	4013B
Frequency Characteristics		
Sine	0.1 Hz to 7 MHz	0.1 Hz to 12 MHz
Square	0.1 Hz to 7 MHz	0.1 Hz to 12 MHz
Triangle	0.1 Hz to 1 MHz	
Resolution	5 digits or 100 mHz	
Accuracy	0.01% ± 0.186 Hz	
Output Characteristics		
Amplitude Range	20 mVpp to 20 Vpp (open circuit); 10 mVpp to 10 Vpp (into 50 $\Omega$ )	
Amplitude Resolution	3 digits (1,000 counts)	
Amplitude Accuracy	$\pm$ 2 % $\pm$ 20 mV of programmed output from 1.01 V – 10 V	
Flatness	± 1 dB to 7 MHz	± 1 dB to 12 MHz
DC Offset Range	-4.5 V to 4.5 V (into 50 Ω)*	
DC Offset Resolution	10 mV, 3 digits	
DC Offset Accuracy	$\pm$ 2 % $\pm$ 10 mV (into 50 $\Omega$ )	
Output Impedance	50 Ω ± 2%	
Output Protection	Protected against short circuit or accidental overvoltage practically available in electronic laboratories, applied to the main output connector	
Waveform Characteristics		
Harmonic Distortion (at 10 Vp-p into 50 Ω)	DC - 100 kHz, -55 dBc 100 kHz - 1 MHz, < -45 dBc 1 MHz – 7 MHz, <-30 dBc	DC - 100 kHz, -55 dBc 100 kHz - 1 MHz, < -45 dBc 1 MHz - 12 MHz, <-30 dBc
Square Rise/Fall Time	≤ 20 ns (10% to 90% at	full amplitude into 50 $\Omega$ )
Duty Cycle	Adjustable 20% - 80% up to 1 MHz for square	
Symmetry Accuracy at 50%	± 1%	
Sweep Characteristics		
Sweep Shape	Linear or Logarithmic, up or down	
Sweep Time	20 ms to 100 s	
Input and Output		
Sync Out	TTL pulse at programmed frequency; 50 $\Omega$ source impedance	
General		
Memory Storage	9 instrument settings	
Power Requirements	100 V – 240 V AC ± 10%	
Operating Temperature	0 °C to 50 °C (32 °F to 122 °F)	
Storage Temperature	-10 °C to 70 °C (14 °F to 158 °F)	
Humidity	95% R.H. 0 °C to 30 °C	
Dimensions (W x H x D)	8.39" x 3.46" x 8.27" (213 x 88 x 210 mm)	
Weight	4.4 lbs (2 kg)	
Electromagnetic Compatibility	Meets EMC Directive 2004/108/EC, EN55011, EN55082	
Safety	Meets Low Voltage Directive 2006/95/EC, EN61010	
	Three-Year Warranty	
Supplied Accessories	Manual on CD, power co	rd, certificate of calibration
*Depending on the amplitude setting		

<sup>\*</sup>Depending on the amplitude setting

Note: All specifications apply to the unit after a temperature stabilization time of 15 minutes over an ambient temperature range of 23 °C  $\pm$  5 °C. Specifications are subject to change without notice.

2 v091814 www.bkprecision.com

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Inrush Current Limiters category:

Click to view products by B&K Precision manufacturer:

Other Similar products are found below:

B57234S330M SL12-22101-AT B57213P0800M301 MT8950AC SL22 20005-B B57235S0259M000V9 B57213P0470M351
B57213P0220M301 B57213P0109M301 B57211P0121M351 AS35 1R040 B57213P0709M301 B57211P0470M301 B57213P0330M301
B57213P0330M351 041337D CL-120AB SL22 2R515-A B57235S479MV9 B57237S0479M051V9 B57236S0259M051V9 SL03 50001
SL03 20001 NT03 10052 SL15 22101 SL08 4R003 SL15 5R007-A SL08 10001 SL22 16005 AS35 2R035 SL15 60004-A SL125R005
SL08 12101-A SL08 10002-A SL05-5R003 MS32 1R036-B MS32 15012-B MS22 12103-B MM35 1R550-DIN MM35 1R050 MM35
0R560-DIN MM35 0R280-DIN B57236S0229M000V9 CL-130A 33510B CL-80AB CL-140AB AS32 0R530-100 AS32 10015 AS32
1R030-100