


CBU-TED


#### Bluetooth controllable dimmer



aric ononrify


CASAMBI

www.casambi.com

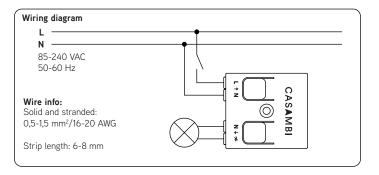

R + C

`**{** X

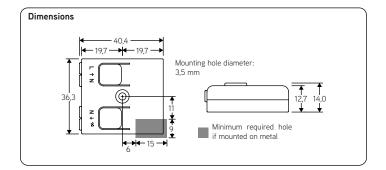

ad suitability		
Type of load	Max. load	
Incandescent and high voltage halogens (R)	150 W	
High quality dimmable LED bulbs (C) <sup>1)</sup>	50 W	
High quality dimmable CFL bulbs (C) <sup>1)</sup>	50 W	
Frailing edge dimmable LED drivers (C) <sup>(1) 2)</sup>	50 W	
ow voltage halogens with electronic transformers (C) <sup>1) 2)</sup>	50 W	
High voltage AC LED modules (R) 3)	150 W	
uminescent lamps, non-dimmable LED and CFL bulbs (C)	Not allowed	
Nire wound transformers, electric motors and other inductive loads (I)	Not allowed	

## Never connect inductive loads, such as iron core transformers. This could cause permanent damage to the dimmer. Do not mix different types of loads.

<sup>1)</sup> Dimming quality depends solely on the load electronics.

Do not connect more than two LED or CFL bulbs to one CBU-TED.

Do not mix different types of bulbs or loads.

<sup>2)</sup> Do not connect more than two electronic transformers to one CBU-TED.

<sup>3)</sup> Some LED modules may flicker at low dimming levels.

### Description

CBU-TED is a Bluetooth controllable, Casambi enabled trailing-edge dimmer for operation of incandescent lamps, dimmable LED lamps and dimmable LED control gear. It can be installed behind a traditional wall switch, inside a luminaire or into a ceiling outlet box. Maximum allowable ambient temperature must be observed.

CBU-TED is able to control up to 150 W. The maximum permissible load varies according to different load types.

CBU-TED can be controlled with Casambi app, available for iOS and Android devices, as well as with traditional wall switches. The Casambi app can be downloaded free of charge from Apple App Store and Google Play Store.


Different Casambi enabled products can be used as a simple one luminaire direct control to a complete and full featured light control system where up to 127 units form automatically an intelligent mesh network.

#### Installation


Make sure that the mains voltage is switched off when making any connections. Use 0,5-1,5 mm<sup>2</sup> solid or stranded conductor electrical wires. Strip the wire 6-8 mm from the end.

Press the buttons on top of the dimmer case and insert the wires to the corresponding holes. Make sure to connect the input and output correctly. Input connector is marked with letters L and N, while the output connector is marked with letter N and a symbol with a wave and an arrow ( $\infty$ ).

If you install the dimmer into a heat sensitive environment (i.e. inside a luminaire or in a ceiling outlet box above a luminaire), make sure that the ambient temperature does not exceed the specified maximum value. Using the dimmer in a heat sensitive environment may limit the maximum output power.



<sup>1)</sup> Range is highly dependant on the surrounding and obstacles, such as walls and building materials.



#### Technical data

/oltage range: Frequency:	85-240 VAC 50-60 Hz
Max. mains current:	0,65 A
No-load standby power:	< 0.3 W
21	( 0,0 11
Dutput	to We and a school stated
Dimming method: Max. output power:	trailing-edge phase control
Incandescent and high voltage halogen bulbs:	150 W @ 230 VAC
incandescent and high voltage halogen builds.	70 W @ 110 VAC
High voltage AC LED modules.	150 W @ 230 VAC
- High voltage AC LED modules:	70 W @ 110 VAC
Dimmable LED and CFL bulbs:	50 W @ 230 VAC 25 W @ 110 VAC
Dimmable electronic transformers:	50 W @ 230 VAC
	25 W @ 110 VAC
Max. output current:	0,65 A
In. load requirement:	1 W
Max. current pulse:	4 A
Radio transceiver	
Operating frequencies:	2,42,483 Ghz
laximum output power:	+4 dBm
Operating conditions	
Ambient temperature, ta:	-20+45 °C
Max. case temperature, tc:	+65 °C
Storage temperature:	-25+75 °C
Max. relative humidity:	080%, non-cond.
Connectors	
Vire range, solid & stranded:	0.5-1.5 mm <sup>2</sup>
	16-20 AWG
Vire strip length:	6-8 mm
Mechanical data	404 242 140
Dimensions:	40,4 x 36,3 x 14,0 mm
Veight: Degree of protection:	15 g IP20 (indoor use only)
regree or protection:	IFZU (Indoor use only)

#### Disposal Instructions

In line with EU Directive 2002/96/EC for waste electrical and electronic equipment (WEEE), this electrical product must not be disposed of as unsorted municipal waste.

Please dispose of this product by returning it to the point of sale or to your local municipal collection point for recycling.



Casambi Technologies Oy Linnoitustie 4, 02600 Espoo, Finland

Information in this document is subject to change. CBU-TED User Guide v1.3.0 ENG

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Management IC Development Tools category:

Click to view products by CASAMBI TECHNOLOGIES manufacturer:

Other Similar products are found below :

EVAL6482H-DISC EVAL-AD5522EBUZ EVAL-ADM1060EBZ EVAL-ADM1073MEBZ EVAL-ADM1166TQEBZ EVAL-ADM1168LQEBZ EVAL-ADM1171EBZ EVAL-ADM1276EBZ EVB-EN5319QI EVB-EN5365QI EVB-EN6347QI EVB-EP5348UI MIC23158YML EV MIC23451-AAAYFL EV MIC5281YMME EV 124352-HMC860LP3E ADM00513 ADM8611-EVALZ ADM8612-EVALZ ADM8613-EVALZ ADM8615-EVALZ ADP1046ADC1-EVALZ ADP1055-EVALZ ADP122-3.3-EVALZ ADP130-0.8-EVALZ ADP130-1.2-EVALZ ADM8615-EVALZ ADP1046ADC1-EVALZ ADP160UJZ-REDYKIT ADP166UJ-EVALZ ADP1712-3.3-EVALZ ADP130-1.2-EVALZ ADP130-1.5-EVALZ ADP130-1.8-EVALZ ADP160UJZ-REDYKIT ADP166UJ-EVALZ ADP1712-3.3-EVALZ ADP1714-3.3-EVALZ ADP1715-3.3-EVALZ ADP1716-2.5-EVALZ ADP1740-1.5-EVALZ ADP1752-1.5-EVALZ ADP1754-1.5-EVALZ ADP1828LC-EVALZ ADP1870-0.3-EVALZ ADP1871-0.6-EVALZ ADP1873-0.6-EVALZ ADP1874-0.3-EVALZ ADP1876-EVALZ ADP1879-1.0-EVALZ ADP1882-1.0-EVALZ ADP1883-0.6-EVALZ ADP197CB-EVALZ ADP199CB-EVALZ ADP2102-1.25-EVALZ ADP2102-1.2-EVALZ