# SURFACE MOUNT SILICON 5.0 AMP SCHOTTKY RECTIFIER



www.centralsemi.com

# **DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CMDFSHC5-100 is a 5.0 Amp silicon Schottky rectifier mounted in a durable epoxy surface mount case, utilizing glass passivated chips.

**MARKING CODE: C5-100C** 



 $\textbf{MAXIMUM RATINGS:} \ (T_{\mbox{\scriptsize A}} = 25 ^{\circ} \mbox{C unless otherwise noted})$ 


	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	V
DC Blocking Voltage	$V_{R}$	100	V
Average Forward Current	IO	5.0	Α
Peak Forward Surge Current (8.3ms)	IFSM	130	Α
Operating Junction Temperature	$T_J$	-55 to +125	°C
Storage Temperature	T <sub>stg</sub>	-55 to +150	°C
Typical Thermal Resistance (Note 1)	$\Theta_{\sf JA}$	55	°C/W
Typical Thermal Resistance (Note 1)	$\Theta_{\sf JL}$	17	°C/W

**ELECTRICAL CHARACTERISTICS:** (T<sub>A</sub>=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	TYP	MAX	UNITS
$I_{R}$	V <sub>R</sub> =100V		500	μΑ
$V_{F}$	I <sub>F</sub> =5.0A (Note 2)	0.79	0.85	V
Ст	V⊳=4.0V. f=1.0MHz	180		Pα


Notes: 1) FR-4 Epoxy PC Board with copper mounting pad area of  $5.0 \, \text{mm}^2$ 

<sup>2)</sup> Pulse test tp=300µs, Duty Cycle=1%






#### **SMC DFN CASE - MECHANICAL OUTLINE**



DIMENSIONS							
	INCHES		MILLIMETERS				
SYMBOL	MIN	MAX	MIN	MAX			
Α	0.037	0.049	0.95	1.25			
В	0.193	0.201	4.90	5.10			
С	0.311	0.319	7.90	8.10			
D	0.073	0.081	1.85	2.05			
E	0.073	0.081	1.85	2.05			
F	0.154		3.90				

SMC DFN (REV: R0)

# SUGGESTED MOUNTING PADS (Dimensions in mm)





MARKING CODE: C5-100C







## TYPICAL ELECTRICAL CHARACTERISTICS












#### TYPICAL APPLICATIONS

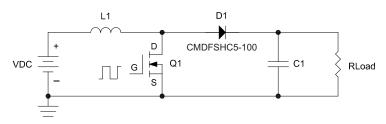

**Figure 1. Boost Converter:** One of the most traditional uses of the Schottky rectifier is in the boost converter, which requires a low-loss rectification element. The CMDFSH Series has been designed to highlight the main qualities of Schottky rectifiers in a space-efficient package; including a low forward voltage drop, fast turn-on time, and extremely fast recovery time. These attributes make the CMDFSH Series an excellent boost rectifier choice for any boost converter system.

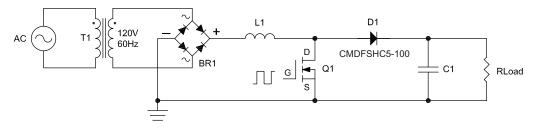


Figure 2. PFC Boost Converter: The most popular adaption of the boost converter is the power factor correction (PFC) boost converter. The power factor is the ratio of real power to actual power dissipated in a circuit. The actual power dissipation of a circuit is altered when inductive components are used in a design. This is due to the inductive reactance of the coil, which causes the current flowing through the system to lag behind the voltage in the system, causing the signals to fall out of phase. Power factor correction increases the power factor by using capacitance to create a leading current effect that compensates for the lagging current effect that is caused by the inductor.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by Central Semiconductor manufacturer:

Other Similar products are found below:

MA4E2039 D1FH3-5063 MBR10100CT-BP MBR1545CT MMBD301M3T5G RB160M-50TR RB551V-30 BAS16E6433HTMA1 BAT
54-02LRH E6327 NSR05F40QNXT5G NTE555 JANS1N6640 SB07-03C-TB-H SB1003M3-TL-W SK310-T SK32A-LTP SK33A-TP
SK34B-TP SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM MA4E2501L-1290 MBRB30H30CT-1G SB007-03C-TB-E SK32A-TP
SK33B-TP SK35A-TP SK38B-TP NRVBM120LT1G NTE505 NTSB30U100CT-1G SS15E-TP VS-6CWQ10FNHM3 ACDBA1100LR-HF
ACDBA1200-HF ACDBA140-HF ACDBA2100-HF ACDBA3100-HF CDBQC0530L-HF CDBQC0240LR-HF ACDBA340-HF
ACDBA260LR-HF ACDBA1100-HF SK310B-TP MA4E2502L-1246 MA4E2502H-1246 NRVBM120ET1G NSR01L30MXT5G NTE573
NTE6081