

1.3 Cable Ties and Fixings

Fixing Ties



MR range of Mounting Head Ties

Features and Benefits


A one piece bundling and fixing tie offering quick and easy installation.

Application


This range of one piece cable ties has a mounting hole fixing method. Once fastened around the cables the bundle can be simply secured to the panel with a screw or bolt.

Ideal for fixing cables, pipes and hoses onto solid surfaces with pre-drilled holes or holes in metal plates.


These ties are used in many industries, for example: building construction, panel builders and white goods manufacturers.

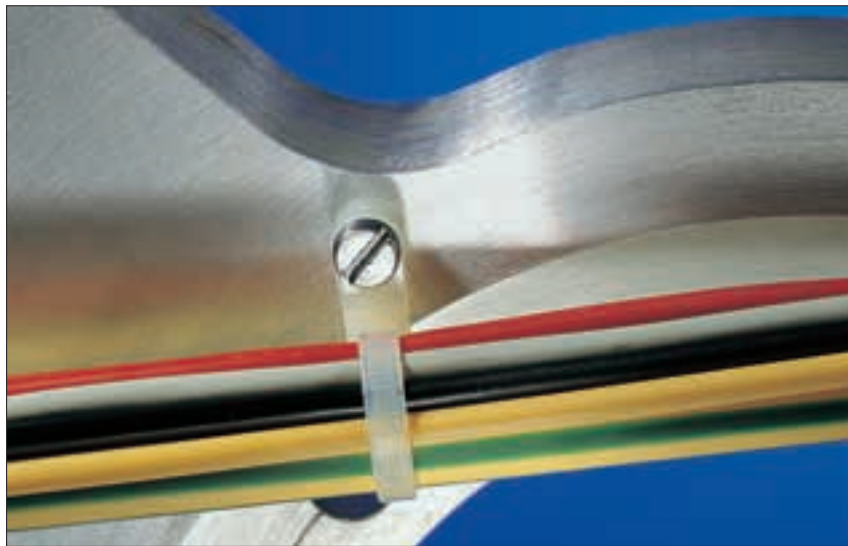

The mounting head ties can be easily screwed onto a panel.



Material specification please see page 40.



Material Data

Material	Polyamide 6.6 UV Resistant (PA66W)
Operating Temperature	-40 °C to +85 °C Continuous, (+105 °C for 500 h)
Flammability	UL94 V2



Material Data

Material	Polyamide 6.6 Heat Stabilised (PA66HS)
Operating Temperature	-40 °C to +105 °C Continuous, (+145 °C for 500 h)
Flammability	UL94 V2



Technical Table

Article-No.	Type	Length (L)	Width (W)	Bundle Ø max.	Min. Tensile Strength (N)	Hole Ø	Material	Colour	Application Tool
113-01819	T18MR	110	2.5	20.0	80	3.1	PA66	Natural (NA)	1-3, 5
113-01810	T18MR	110	2.5	20.0	80	3.1	PA66	Black (BK)	1-3, 5
113-01801	T18MR	110	2.5	20.0	80	3.1	PA66HS	Natural (NA)	1-3, 5
113-03019	T30MR	160	3.5	32.0	135	4.3	PA66	Natural (NA)	1-3, 5
113-03020	T30MR	160	3.5	32.0	135	4.3	PA66	Natural (NA)	1-3, 5
113-03010	T30MR	160	3.5	32.0	135	4.3	PA66	Black (BK)	1-3, 5
113-00004	T30MR	160	3.5	32.0	135	4.3	PA66	Black (BK)	1-3, 5
113-00006	T30MR	160	3.5	32.0	135	4.3	PA66W	Black (BK)	1-3, 5
113-03160	T30MR	160	3.5	32.0	135	4.3	PA66W	Black (BK)	1-3, 5
113-05019	T50MR	215	4.7	45.0	225	5.4	PA66	Natural (NA)	1-10
113-05010	T50MR	215	4.7	45.0	225	5.4	PA66	Black (BK)	1-10
113-05060	T50MR	215	4.7	45.0	225	5.4	PA66W	Black (BK)	1-10
113-05819	T50MS	165	4.6	32.0	225	5.3	PA66	Natural (NA)	1-10
113-05820	T50MS	165	4.6	32.0	225	5.3	PA66	Black (BK)	1-10
113-05419	T50ML	390	4.7	100	225	5.5	PA66	Natural (NA)	1-10
113-05400	T50ML	390	4.7	100	225	5.5	PA66	Black (BK)	1-10
113-12017	T120MR(E)	395	7.6	102	535	6.5	PA66W	Black (BK)	6-10
113-12018	T120MR(E)	395	7.6	102	535	6.5	PA66	Natural (NA)	6-10
113-00001	T120MR(E)	395	7.6	102	535	6.5	PA66	Black (BK)	6-10

All dimensions in mm. Subject to technical changes.



Please Note for Product Specific Approvals please refer to the Appendix

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Wire Identification](#) category:

Click to view products by [Hellermann](#) manufacturer:

Other Similar products are found below :

[CU6337-000](#) [CU6342-000](#) [FCA-410-12](#) [11631010](#) [1-1768037-1](#) [1-1768037-2](#) [1-1768050-0](#) [PXLK-VI](#) [Q62184-1](#) [A64304-000](#) [QMT221](#)
[HK032WE1NF038B](#) [1330-0519-10](#) [1395199-1](#) [1395200-1](#) [1395202-1](#) [DMVF050WE-300S6](#) [D-SCE-1K-2.4-50-4-CS7834](#) [1538738-1](#)
[E90935-000](#) [EC1238-000](#) [EC1465-000](#) [EC1855-000](#) [EC1859-000](#) [EC1863-000](#) [EC5415-000](#) [EC7277-000](#) [EC7352-000](#) [EC7603-000](#)
[EC7707-000](#) [EC7735-000](#) [EC7768-000](#) [EC7828-000](#) [EC7854-000](#) [EC7952-000](#) [EC8128-000](#) [1768037-8](#) [1768041-7](#) [NC-127191-10-9](#)
[HS048WE2NF038B](#) [C03232-000](#) [HTCM-SCE-14-4H-9](#) [HTMS-3/16-9](#) [HT-SCE-1/4-2.0-4](#) [HT-SCE-3/16-2.0-4](#) [HTTMS-1/2-1.50-9](#) [HTTMS-](#)
[CM-1/2-4H-9](#) [HX-SCE-19.0-50-9](#) [HX-SCE-6.4-50-4](#) [C25254-000](#)