

Fuseholders 5 x 20 mm



6.3A 250Vac (max fuse rating*) T-55 to T+70 (ambient)
 Maximum dissipation wattage: 1.5W
 UL 94V2 UL file E92075 CSA file LR44770

These products comply with safety category PC2

*Users should be aware of the de-rating factors published by specialist manufacturers of fuses


These fuseholders are fitted with combination (solder / 2.8) mid-body terminals
 It has not been possible to show both views here



M520
Terminal Cover




A0033 00
In-line 5 x 20 fuseholder
Call factory for rating details




TERMINAL	BODY AND CAP	PANEL HOLE
<p>T</p> <p>Solder</p>	<p>0332 Finger release</p> <p>0333 Tool release</p> <p>0340 Tool release</p> <p>0341 Tool release</p>	<p>RA</p> <p>RD</p>

DIMENSIONS (mm)


0332 (T terminal shown)

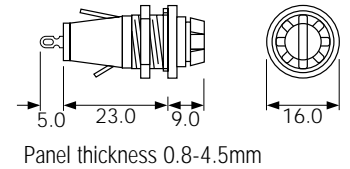


0333 (T terminal shown)

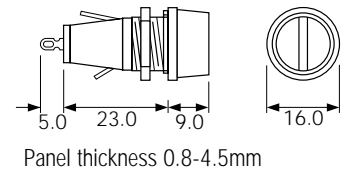



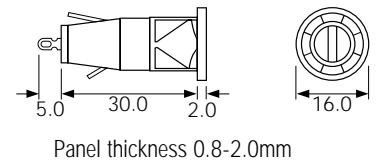



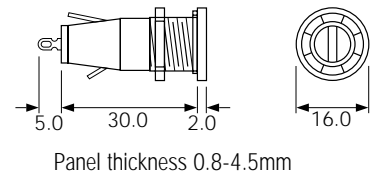


0340 (T terminal shown)




0341 (T terminal shown)



TYPE	TERMINAL
0721-P (2k min order)  Inlet 	S Solder 
0722-C (2k min order)  Inlet 	Q 4.8 Solder  W 6.3 Tab 
0723-C (2k min order)  Outlet 	Q 4.8 Solder  W 6.3 Tab 

DIMENSIONS (mm)

View below is at Y

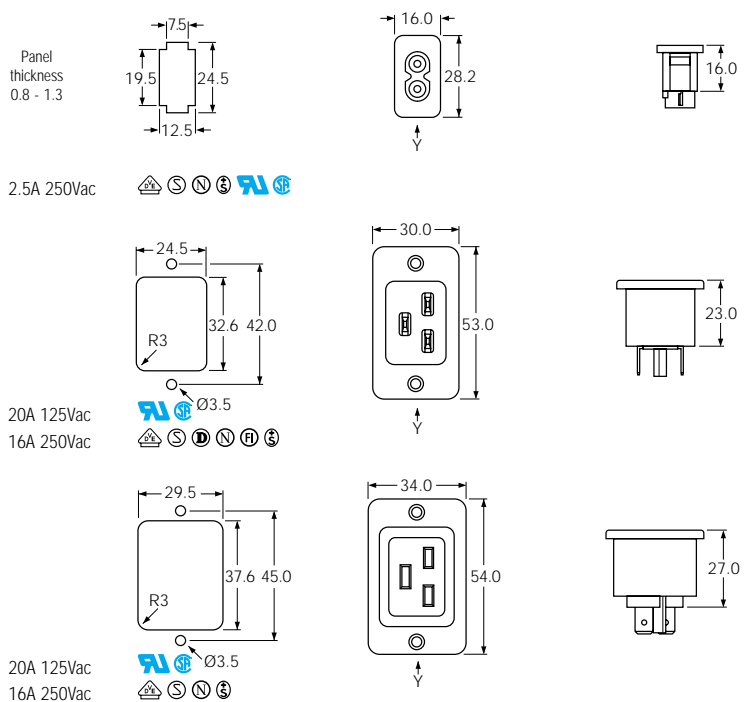













Technical data

Mouldings V2 (VO option)
 Connectors Tin plated solid brass
 Terminals Silver plated

Terminal dimensions

For Connectors

For Switches

For Connectors									For Switches		
S	N	Q	W	P	L	LS	V12	V16	Slide T	Slide K	Rocker T
2.5mm Solder	4mm Solder	4.8mm Solder/ Fast on	6.3 Fast on	PCB	Solder	2.8mm Solder	12-14 AWG Solid Wire	16 AWG Solid Wire	Solder	2.8mm Solder	4.8mm Solder
											
1.5x2.5 4.5	2.0x3.2 5.5	2.8x3.3 6.5	Ø1.7 8.0	1.7x3.0 5.5	Ø3.0x6.0	1.5x3.0 10.0	1.35	0.8	2.5 6.0 1.6	2.5 7.0 1.3	R1.0 R0.8 3.5 8.5

Note: Designated solder terminals should not be fitted with "Push on", "OD" or "Fast on" type cable connectors

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [arcolectric manufacturer](#):

Other Similar products are found below :

[F0167LOAAA](#) [H8553VBBG3076W](#) [R13112BBR3](#) [R13112LPBR1](#) [NL275C3A-CHROME](#) [NL67H2A](#) [C1510AABW](#) [C1550WABWCL050B](#)
[C5503PLBR5](#) [C5503PLBR3](#) [279672](#) [H8500XBDDR076R](#) [R13112B2BR6](#) [R13112BBG3](#) [C1550WABB602AW](#) [C6053ALBG31197W](#) [3700](#)
[LE2870C5G](#) [LHM62R](#) [512F10AE222](#) [64F500FA383](#) [C1350XBMBBG](#) [C1353ATMBG3602AW](#) [C1300AAAAA](#) [C1353VQGBR3602AW](#)
[C1353VQGBG3602AW](#) [C1500XAMBBR](#) [T0340RA](#) [L104100FAF](#) [H8503VBBR2](#) [H8503VBNAE](#) [NL67C2R](#) [C3900BA](#) [NL2950BWL2A](#)
[C6053ALBG31197WB](#) [NL177WL2R](#) [C480AABA7](#) [H8503VBBR2-B](#) [468](#) [LH1050WL-3602](#) [T0063AOFAD](#) [C1560AAAAA](#)
[NL2870WL3R-VDE](#) [NL177WL3G](#) [C5503ATBR2](#) [C6090ALBR2-1197W-B](#) [LE177C39007](#) [LE276C39018](#) [LE2951WL5G](#) [A104700BLACK](#)