


Flyback Transformer For Microchip Technology's Isolated AC LED driver



- Developed specifically for Microchip Technology's Isolated AC LED driver to operate with PIC16HV785 CMOS Microcontroller and MCP1402 Gate Driver
- Universal ac input; 20 V, 0.7 A output; Operates at 125 kHz
- 3000 Vrms, one minute isolation from the primary and bias to the secondary winding
- Bias winding supplies 12 V to power the microprocessor

Core material Ferrite

Terminations RoHS tin-silver over tin over copper clad steel. Other terminations available at additional cost.

Weight 11.7 g Ambient temperature -40°C to +85°C

Storage temperature Component: -40°C to +85°C.

Tray packaging: -40°C to +80°C

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Packaging 117 parts per tray

PCB washing Only pure water or alcohol recommended

Part	Power	Inductance at 0 A ¹	Inductance at Ipk ²	DCR	max (C	Dhms)	Leakage inductance ³	Turns ratio	Ipk ²	
number	(W)	±10% (μΗ)	min (µH)	pri	sec	bias	max (µH)	pri : sec pri : bias	(A)	Output ⁴
GA3172-AL	14	500	450	0.675	0.245	0.325	8.25	1:0.214 1:0.131	0.78	20 V, 0.7 A

1. Inductance measured at 125 kHz, 0.1 Vrms, 0 Adc.


2. Peak primary current drawn at minimum input voltage.


3. Leakage inductance is for the primary and is measured with the secondary shorted.

4. Output is for the secondary. Bias winding output is 12 V.

5. Electrical specifications at 25°C.


Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



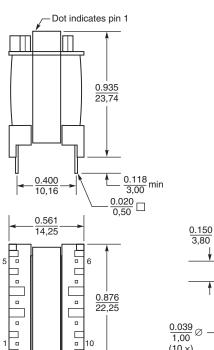

10





inches Dimensions are in mm



US +1-847-639-6400 sales@coilcraft.com UK +44-1236-730595 sales@coilcraft-europe.com Taiwan +886-2-2264 3646 sales@coilcraft.com.tw China +86-21-6218 8074 sales@coilcraft.com.cn Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 682 Revised 09/01/09 © Coilcraft Inc. 2021

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specification subject to change without notice. Please check web site for latest information.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by Coilcraft manufacturer:

Other Similar products are found below :

CX2041NLT MGPWT-00449-P PE-64961 H1302FNLT H5008FNL H5012FNL H5020FNLT H5077NLT H5079NLT H5084FNLT B78476A9558A003 1812WBT2-4 1879479-1 HX2260FNL HX5014FNL EX2024FNL FL1066 T1137NLT T3012NL PE-65812FNL PE-65848FNLT H1174FNL H1302FNL H5015FNL H5019EFNL H5062FNLT CX2047LNL MGPWT-00059-P MGPWT-00266-P MGPWT-00278-P MGPWT-00431-P TTC-100 TTC-143-H TTC-5032-1 BX1194WNLT HX1234NLT HX5008FNLT HX5019FNL HX5084NL 3-1879385-5 TX1263NLT 4-1879391-0 T1142NL HX6101FNL HX5084FNL HX1148NL HX5020FNLT HX5014FNLT T1124NL 1879732-1