



DAGON Company  
64-100 Leszno  
ul. Jackowskiego 24  
Poland



## SEPGAL I/I

Galvanic separator of  
analog current signal  
0/4-20mA at 0/4-20mA  
in a housing for a DIN rail



The SEPGAL I / I separator is used to provide galvanic isolation between two circuits of standard analogue current type 0-20mA or 4-20mA signals.

The separator can work with an input signal of 0-20mA or 4-20mA converting it to an output signal of 0-20mA or 4-20mA. Thus, there are 4 operating modes available, which are selected using two jumpers.

You can also connect a 2-wire passive transducer of any physical size (eg temperature, pressure) working in the 4-20mA standard to the analog input.

### Technical data SEPGAL I/I.

#### Power supply (terminals 1 and 2):

- power supply voltage:
- power consumption:

22V...28V DC  
≤ 40mA without load outputs

#### Additional power output (terminals 3 and 5):

- supply voltage - unstabilized:
- current limit:

24V...25V DC without load  
≥ 21V with load of 20mA  
50mA - protection against short circuit to ground

#### Current input (terminals 4 and 5):

- voltage drop at the input:
- corresponds to the input resistance:
- current limit:

0...6V for  $I_{in} = 0...20mA$   
300Ω but it is not a linear relationship  
30mA - protection against to high voltage - max 30V

#### Current output (terminals 9 and 10):

- load resistance:
- short-circuit protection:

≤ 750Ω  
YES - protection against voltage on output - max 30V




#### Other:

- accuracy of analog signal processing:
- response / conversion time (10-90%):
- separation (U/In/Out):
- operating temperature range:
- relative humidity range:
- level of security:
- work position:
- weight:
- housing dimensions:
- assembly:

± 0.2%  
≤ 0.3sek  
1kV, 50Hz, 1 min  
0-65 °C  
0-90% (without condensation)  
IP20  
any  
≤ 150g  
17.5 x 120 x 116 mm  
in a housing for a DIN rail (TS35)

Connection diagram of SEPGAL I/I separator.

## SEPGAL I / I

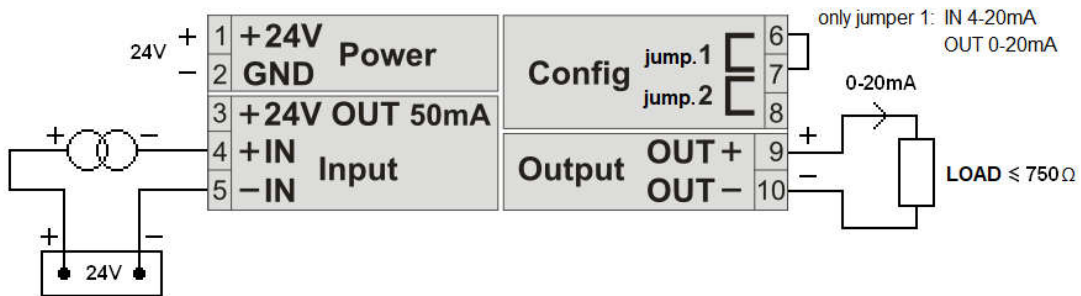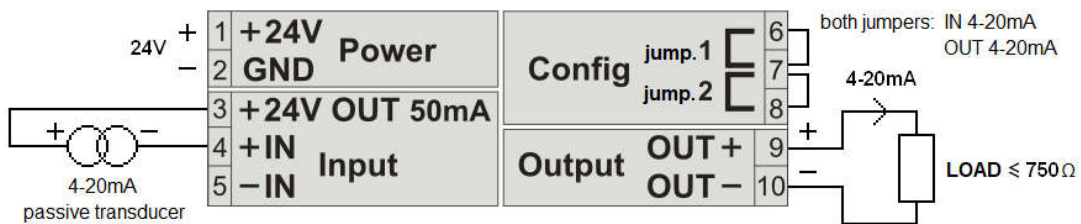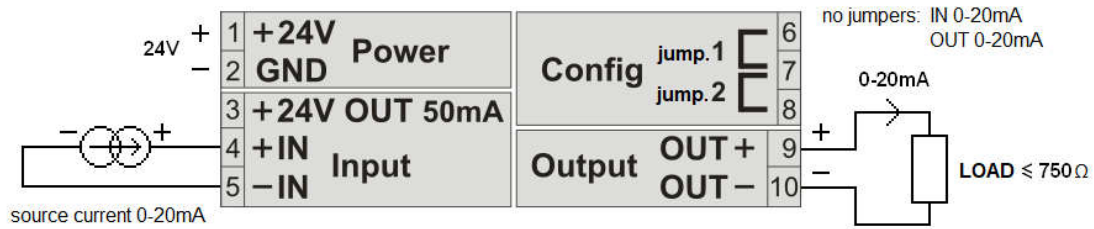

**Configuration jumpers:**

- jump.1 OFF - IN 0-20mA
- jump.1 ON - IN 4-20mA
- jump.2 OFF - OUT 0-20mA
- jump.2 ON - OUT 4-20mA

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Measuring Tools](#) category:*

*Click to view products by [DAGON](#) manufacturer:*

Other Similar products are found below :

[G336](#) [M225203-01](#) [G426](#) [G1333](#) [G1327](#) [G1154](#) [G1150](#) [G1152](#) [G1157](#) [G1153](#) [G1155](#) [G1009](#) [1051-03](#) [121010D](#) [121050D](#) [25541](#) [8255](#)  
[NF-221200130](#) [20323](#) [20329](#) [20363](#) [20365](#) [20515](#) [20516](#) [G800](#) [G1229](#) [5205000](#) [5206000](#) [5223000](#) [6921000](#) [YT-30061](#) [W002900](#)  
[W061008](#) [W061009](#) [W061010](#) [W062004](#) [W066005](#) [W066006](#) [15225](#) [15228](#) [16135](#) [16456](#) [17215](#) [17218](#) [17221](#) [17670](#) [17672](#) [17677](#)  
[17953](#) [18115](#)