

AP3012K EVB User Guide

1.5MHz, Step-Up DC/DC Converter

DESCRIPTION

The AP3012 is a high power, constant frequency, current mode PWM, inductor based, step-up (boost) converter. The converter operates at high frequency (1.5MHz) so that a small, low profile inductor can be used.

The AP3012 has built-in overvoltage protection (OVP) to allow the device to go into shutdown

mode when the output voltage exceeds the OVP threshold of 29V.

The AP3012 is available in standard SOT25 package.

FEATURES

- High Efficiency up to 81%
- Adjustable Output Voltage up to 29V
- Shutdown Current 1µA Typical
- 1.5MHz Switching Frequency

- 36V 500mA Rugged Integrated Bipolar Switch
- Built-in Soft-start to Reduce Inrush Current During Start-up
- On-chip Overvoltage Protection

APPLICATIONS

- LCD/OLED Display Bias Supply
- White LED Driver for LCD Display Backlights
- Cellular Phones

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Min | Max | Unit |
|--------|-----------------------|-----|-----|------|
| VIN | Input Voltage | 2.6 | 16 | V |
| Тор | Operating Temperature | -40 | 85 | °C |

ABSOLUTE MAXIMUM RATINGS

| Symbol | Parameter | Rating | Unit |
|-------------------|--|-------------|------|
| V _{IN} | Input Voltage | 20 | V |
| _ | SW Voltage | 38 | V |
| _ | FB Voltage | 5 | V |
| | SHDN Voltage | 16 | V |
| θ_{JA} | Thermal Resistance (Junction to Ambient, no Heat Sink) | 265 | °C/W |
| _ | Operating Junction Temperature | +150 | °C |
| Tstg | Storage Temperature Range | -65 to +150 | °C |
| T _{LEAD} | Lead Temperature (Soldering, 10sec) | +260 | °C |
| _ | ESD (Machine Model) | 250 | V |
| _ | ESD (Human Body Model) | 2000 | V |



EVALUATION BOARD

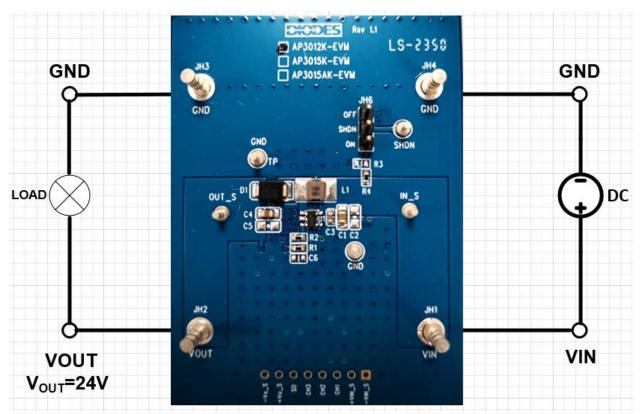


Figure 1. AP3012K-EVM

QUICK START GUIDE

The AP3012K-EVM has a simple layout and allows access to the appropriate signals through test points. To evaluate the performance of the AP3012KTR, follow the procedure below:

- 1. Connect a power supply to the input terminals VIN and GND. Set VIN to 5V.
- 2. Connect the positive terminal of the electronic load to VOUT and negative terminal to GND.
- 3. For Enable, to enable IC, place a jumper at JH6 to "ON" position to connect EN pin to VIN through $100K\Omega$ resistor. Jump to "OFF" position to disable IC.
- 4. The evaluation board should now power up with a 24V output voltage.
- 5. Check for the proper output voltage of 24V at the output terminals VOUT and GND. Measurement can also be done with a multimeter with the positive and negative leads between VOUT_S and GND.
- 6. Set the load to 30mA through the electronic load. Check for the stable operation of the SW signal on the oscilloscope. Measure the switching frequency.



MEASUREMENT/PERFORMANCE GUIDELINES:

- When measuring the output voltage ripple, maintain the shortest possible ground lengths on the oscilloscope probe. Long ground leads can erroneously inject high-frequency noise into the measured ripple.
- 2) For efficiency measurements, connect an ammeter in series with the input supply to measure the input current. Connect an electronic load to the output for output current.

EVALUATION BOARD SCHEMATIC


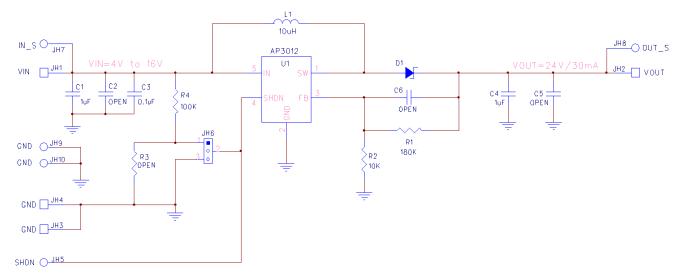



Figure 2. AP3012K-EVM Schematic



TOP LAYOUT

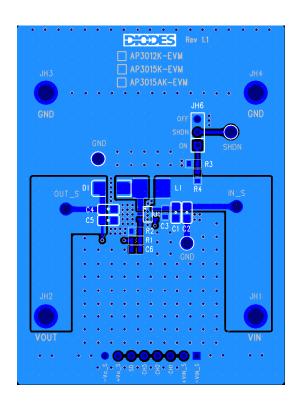


INNER LAYER 2 LAYOUT

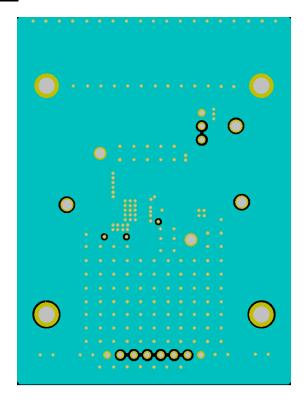




INNER LAYER 3 LAYOUT

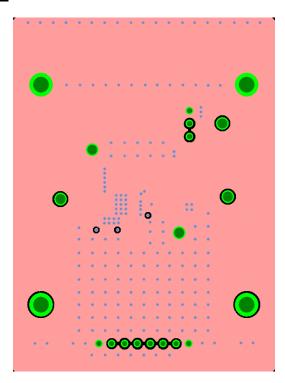

BOTTOM LAYOUT

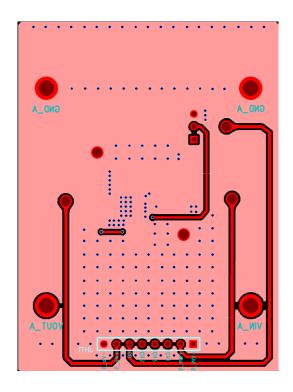



AP3012K EVB User Guide


1.5MHz, Step-Up DC/DC Converter


BILL OF MATERIALS (BOM) for AP3012K-EVM


| Ref | Value | Description | Qty | Size | Vendor Name | Manufacturer PN |
|-----------------------------------|--------|---|-----|-------------------|------------------------------------|--------------------|
| C1 | 1μF | Ceramic Capacitor, 25V, X7R, 10% | 1 | 0805 | Murata | GCM21BR71E105KA56L |
| C3 | 0.1µF | Ceramic Capacitor, 25V, X7R, 10% | 1 | 0603 | Murata | GCJ188R71E104KA12D |
| C4 | 1μF | Ceramic Capacitor, 35V, X7R, 10% | 1 | 0805 | Murata | GCM21BR7YA105KA55L |
| R4 | 100ΚΩ | RES SMD 1%, 1/10W | 1 | 0603 | Panasonic | ERJ-3EKF1003V |
| R1 | 180ΚΩ | RES SMD 1%, 1/10W | 1 | 0603 | Panasonic | ERJ-3EKF1803V |
| R2 | 10ΚΩ | RES SMD 1%, 1/10W | 1 | 0603 | Panasonic | ERJ-3EKF1002V |
| L1 | 10µH | DCR=322mΩ, Ir=1.65A | 1 | 3.0x3.0x2.0 mm | Wurth Electronics | 74438336100 |
| D1 | | Diode Schottky 40V, 1A | 1 | SMB | Diodes Incorporated (Diodes) | B140B-13-F |
| JH6 | | PCB Header, 40 POS | 1 | 1x3 | Wurth Electronics | 61304011121 |
| IN_S, OUT_S, SHDN, GNDx2 | 1573 | Terminal Turret 0.082" L (Test Points) | 5 | Through- Hole | Keystone Electronics | 1573-2 |
| JH1, JH2, JH3, JH4 | 1598 | Terminal Turret Triple 0.094" L (Test Points) | 4 | Through- Hole | Keystone Electronics | 1598-2 |
| U1 | AP3012 | Sync DC/DC Converter | 1 | SOT25 | Diodes | AP3012KTR |




TYPICAL PERFORMANCE CHARACTERISTICS





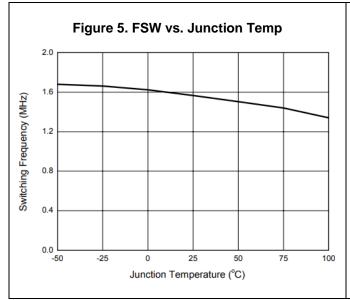





AP3012K EVB User Guide

1.5MHz, Step-Up DC/DC Converter

IMPORTANT NOTICE

- 1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- 2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- 3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
- 4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- 5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- 6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- 7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- 8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
- 9. This Notice may be periodically updated with the most recent version available at https://www.diodes.com/about/company/terms-and-conditions/important-notice

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries. All other trademarks are the property of their respective owners.

© 2024 Diodes Incorporated. All Rights Reserved.

www.diodes.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Management IC Development Tools category:

Click to view products by Diodes Incorporated manufacturer:

Other Similar products are found below:

EVB-EP5348UI BQ25010EVM ISL80019AEVAL1Z ISLUSBI2CKIT1Z ISL8002AEVAL1Z ISL91108IIA-EVZ ISL28022EVKIT1Z

STEVAL-ISA008V1 DRI0043 NCP10671B05GEVB EVB-EN6337QA SAMPLEBOXILD8150TOBO1 AP61100Z6-EVM AP62300WU
EVM KITA2GTC387MOTORCTRTOBO1 AEK-MOT-TK200G1 EVLONE65W STEVAL-ILH006V1 STEVAL-IPE008V2 STEVAL
IPP001V2 STEVAL-ISA013V1 STEVAL-ISA067V1 STEVAL-ISQ002V1 TPS2306EVM-001 TPS2330EVM-185 TPS40001EVM-001

SECO-HVDCDC1362-15W-GEVB BTS7030-2EPA LTC3308AIV#WTRPBF TLT807B0EPV BTS71033-6ESA EV13N91A EV55W64A

Si8285_86v2-KIT NCP-NCV51752D2PAK3LGEVB ISL81807EVAL1Z EVALM7HVIGBTPFCINV4TOBO1 903-0300-000 903-0301-000

ROA1286023/1 REFSHA35IMD111TSYSTOBO1 150037482 SABMB629 TDINV3000W50B-KIT NCP1681CCM1KWGEVB I7C08A
CC3-EVK-P2 I7C12A-CC3-EVK-P2 i7C20A-CC3-EVK-P2 RTK9754L27S01000BE APEK89303KET-01-T