

EMC filters

3-line filters for converters and power electronics

 Series/Type:
 B84143B*S020/S021/S024

 Date:
 October 2018

© TDK Electronics AG 2018. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without TDK Electronics' prior express consent is prohibited.



for converters and power electronics

Power line filters for 3-phase systems

Rated voltages V_R : 310/530 V AC, 400/690 V AC and 440/760 V AC

Rated current I_R : 150 A to 2500 A

Alternative version

Series B84143B*S080 and B84143B*S081 offer cost-optimized solutions.

Construction

- 3-line filters
- Metal case

Features

- Optimized leakage current
- Easy to install
- Very compact design
- Optimized for operation under full load
- Low weight
- UL and cUL approval



Typical applications

- B84143B*S024 for IT mains supply
- Frequency converters for motor drives
- Wind farms
- Power supplies

Terminals

Busbars

Marking

Marking on component:

Manufacturer's logo, ordering code, rated voltage, rated current, rated temperature, climatic category, date code, approvals

Minimum data on packaging: Manufacturer's logo, ordering code, quantity, date code

Accessories

For busbar filter series B84143B*S020 ... S024 protective covers can be supplied as accessories. See chapter "Accessories" B84143Q*S020.




Please read *Cautions and warnings* and *Important notes* at the end of this document.

B84143B*S020/S021/S024



for converters and power electronics

Typical circuit diagram

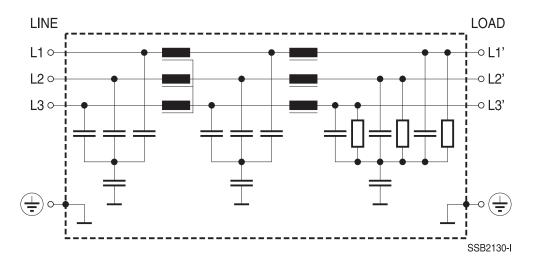

Technical data and measuring conditions

Type S020:	310/530 V AC (50/60 Hz)			
Type S021:	440/760 V AC (50/60 Hz)			
Type S024:	400/690 V AC (50/60 Hz)			
Filters for IT mains supply. See also chapter "General				
technical inform	technical information", section 7.			
Referred to 40	Referred to 40 °C rated temperature			
According IEC	According IEC 60439-1: 2011, Kapitel 3.8.10.2, limited by			
I ² t characteristic	I ² t characteristics of fuse			
Type S020:	2280 V DC, 2 s (line/line)			
	2690 V DC, 2 s (lines/case)			
Type S021:	3270 V DC, 2 s (line/line)			
	2890 V DC, 2 s (lines/case)			
Type S024:	2980 V DC, 2 s (line/line)			
	2890 V DC, 2 s (lines/case)			
1.5 · I _R for 3 mi	1.5 \cdot I _R for 3 min per hour or			
$2.5 \cdot I_R$ for 30 s	$2.5 \cdot I_{R}$ for 30 s per hour			
At V_{R} and 50 H	At V_{R} and 50 Hz			
25/100/21 (-25	25/100/21 (-25 °C/+100 °C/21 days damp heat test)			
UL 1283; CSA C22.2 No.8				
(Type S020: 50	(Type S020: 500/290 V; Type S021 and S024: 600/350 V)			
	Type S021:Type S024:Filters for IT matchFilters for IT matchtechnical informReferred to 40According IECI²t characteristicType S020:Type S020:Type S021:Type S024:1.5 \cdot I _R for 3 mi2.5 \cdot I _R for 30 sAt V _R and 50 H25/100/21 (-25)UL 1283; CSA			

B84143B*S020/S021/S024



B84143B*S020/S021/S024

for converters and power electronics

I _R	I _{pk}	I _{LK}	R _{typ}	Approx. weight	Ordering code	Approval	S
А	kA	mA	mΩ	kg		71	c 91
V _R = 310/	530 V AC	1	1		l	1	
150	25	13	0.140	13	B84143B0150S020	×	×
180	25	13	0.140	13	B84143B0180S020	×	×
250	25	13	0.063	15	B84143B0250S020	×	×
320	50	13	0.067	21	B84143B0320S020	×	×
400	50	13	0.067	21	B84143B0400S020	×	×
600	50	13	0.052	22	B84143B0600S020	×	×
1000	75	13	0.033	42	B84143B1000S020	×	×
1600	75	13	0.022	50	B84143B1600S020	×	×
2500	100	13	0.015	142	B84143B2500S020	×	×
$V_{R} = 400/$	690* V AC)					·
150	25	16	0.140	13	B84143B0150S024	×	×
180	25	16	0.140	13	B84143B0180S024	×	×
250	25	16	0.063	15	B84143B0250S024	×	×
320	50	17	0.067	21	B84143B0320S024	×	×
400	50	17	0.067	21	B84143B0400S024	×	×
600	50	17	0.052	22	B84143B0600S024	×	×
1000	75	17	0.033	42	B84143B1000S024	×	×
1600	75	17	0.022	50	B84143B1600S024	×	×
2500	100	17	0.015	142	B84143B2500S024	×	×
V _R = 440/760 V AC							
150	25	18	0.140	13	B84143B0150S021	×	×
180	25	18	0.140	13	B84143B0180S021	×	×
250	25	18	0.063	15	B84143B0250S021	×	×
320	50	19	0.067	21	B84143B0320S021	×	×
400	50	19	0.067	21	B84143B0400S021	×	×
600	50	19	0.052	22	B84143B0600S021	×	×
1000	75	19	0.033	42	B84143B1000S021	×	×
1600	75	19	0.022	50	B84143B1600S021	×	×
2500	100	19	0.015	142	B84143B2500S021	×	×

 \times = Approval granted:

Type S020 for 290/500 V

Type S021 and S024 for 350/600 V

* Filters for IT mains supply (see also chapter "General technical information", section 7).




B84143B*S020/S021/S024

for converters and power electronics

Dimensional drawings

B84143B0150S02*, B84143B0180S02* (150 A, 180 A)

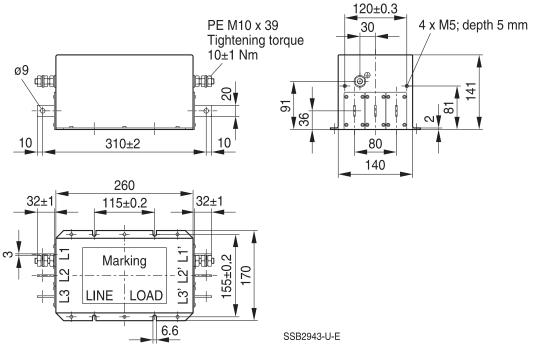


General tolerances according to ISO 2768-cL Dimensions in mm



B84143B*S020/S021/S024

for converters and power electronics

B84143B0250S02* (250 A)

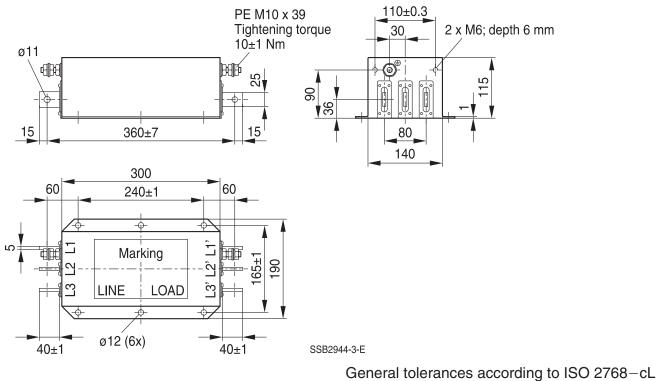


Dimensions in mm



B84143B*S020/S021/S024

for converters and power electronics

B84143B0320S02*, B84143B0400S02* (320 A, 400 A)

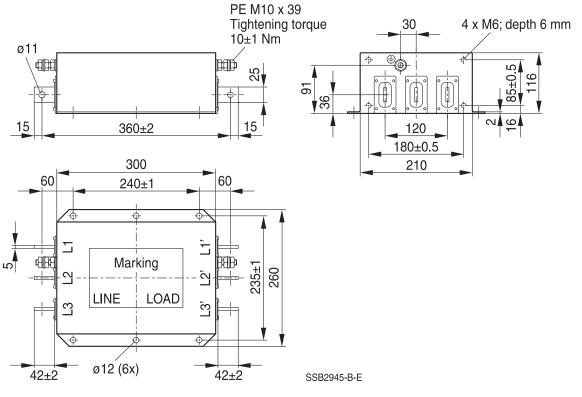


General tolerances according to ISO 2768-cL Dimensions in mm



B84143B*S020/S021/S024

for converters and power electronics

B84143B0600S02* (600 A)

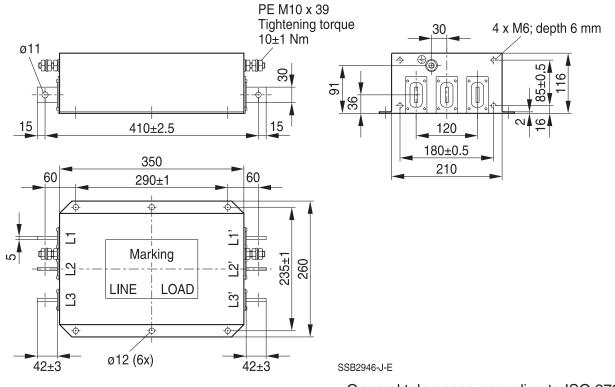


General tolerances according to ISO 2768-cL Dimensions in mm



B84143B*S020/S021/S024

for converters and power electronics

B84143B1000S02* (1000 A)

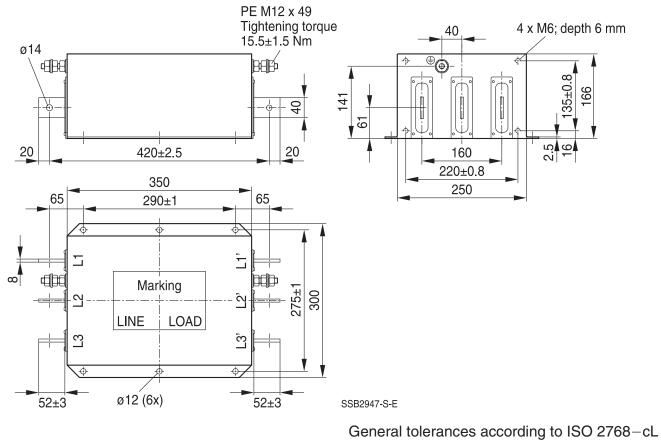


Dimensions in mm



for converters and power electronics

B84143B*S020/S021/S024

B84143B1600S02* (1600 A)

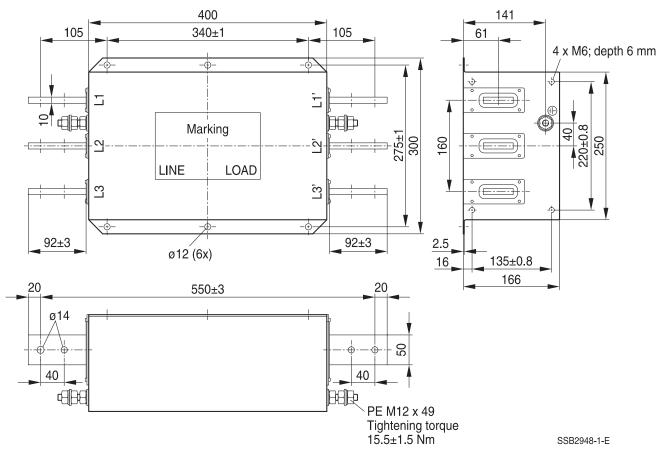


General tolerances according to ISO 2768-cL Dimensions in mm



B84143B*S020/S021/S024

for converters and power electronics

B84143B2500S02* (2500 A)

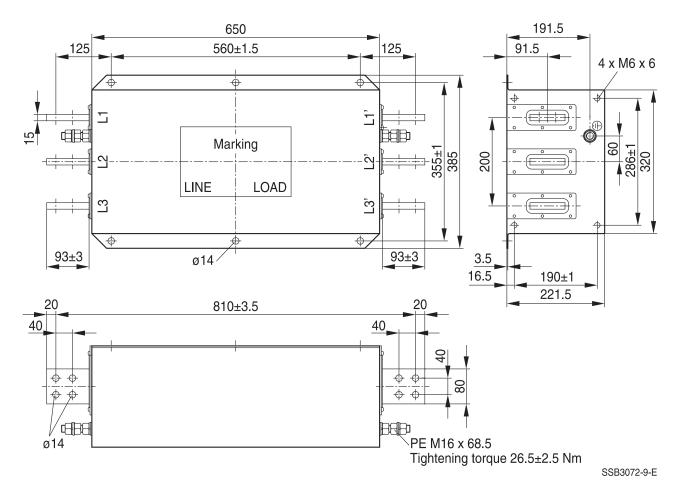

General tolerances according to ISO 2768-cL Dimensions in mm




for converters and power electronics


Insertion loss (typical values at $Z = 50 \Omega$)

- —— unsymmetrical, adjacent branches terminated
 - common mode, all branches in parallel (asymmetrical)
- - - differential mode (symmetrical)


Filters for 150 A ... 250 A (Type S020)

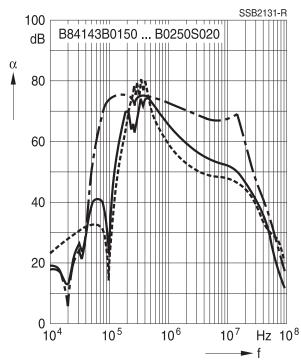

Filters for 1600 A and 2500 A (Type S020)

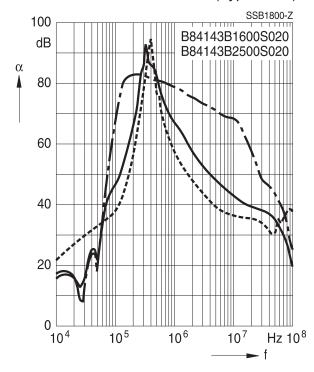

Filters for 320 A ... 1000 A (Type S020)

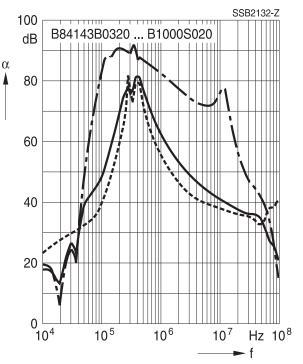

Please read *Cautions and warnings* and *Important notes* at the end of this document.



for converters and power electronics

Insertion loss (typical values at $Z = 50 \Omega$)

- unsymmetrical, adjacent branches terminated
 - common mode, all branches in parallel (asymmetrical)

60

40

20

0

10⁴

10⁵


10⁶

Hz 10⁸


f


10⁷

- – – – differential mode (symmetrical)

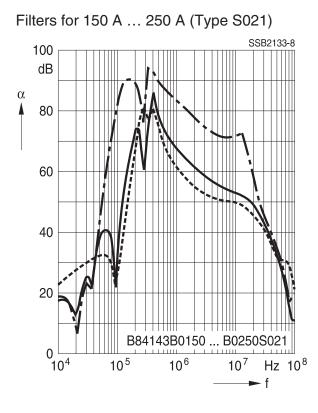

Filters for 1600 A and 2500 A (Type S021)

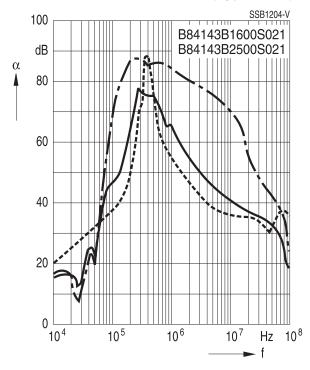






for converters and power electronics


Insertion loss (typical values at $Z = 50 \Omega$)

- unsymmetrical, adjacent branches terminated
 - common mode, all branches in parallel (asymmetrical)
- ---- differential mode (symmetrical)


Filters for 150 A ... 250 A (Type S024)

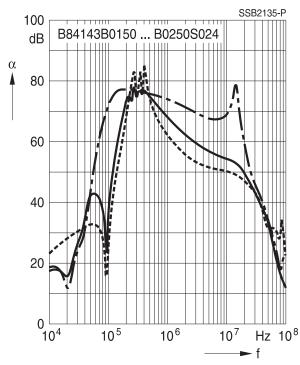

Filters for 1600 A and 2500 A (Type S024)

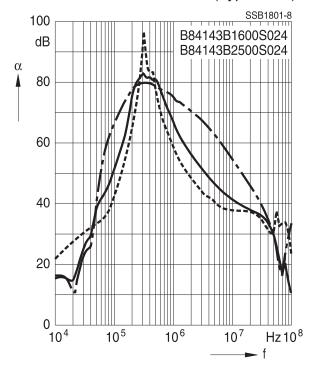



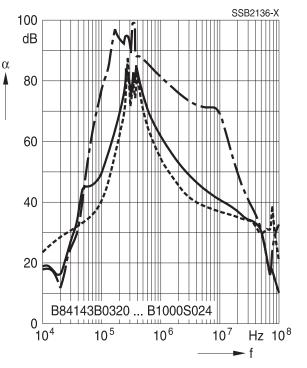

Please read *Cautions and warnings* and *Important notes* at the end of this document.



B84143B*S020/S021/S024

3-line filters

Please read all safety and warning notes carefully before installing the filter and putting it into operation (see \underline{M}). The same applies to the warning signs on the filter. Please ensure that the signs are not removed nor their legibility impaired by external influences.

Death, serious bodily injury and substantial material damage to equipment may occur if the appropriate safety measures are not carried out or the warnings in the text are not observed.

Using according to the terms

The filters may be used only for their intended application within the specified values in lowvoltage networks in compliance with the instructions given in the data sheets and the data book. The conditions at the place of application must comply with all specifications for the filter used.

Marning

- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. Filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off.
- The protective earth connections shall be the first to be made when the filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective earth connection must be observed.
- Impermissible overloading of the filter or filter, such as with circuits able to cause resonances, impermissible voltages at higher frequencies etc. can lead to bodily injury and death as well as cause substantial material damages (e.g. destruction of the filter housing).
- Filters must be protected in the application against impermissible exceeding of the rated currents by overcurrent protective devices.
- In case of leakage currents >3.5 mA you shall mount the PE conductor stationary with the required cross section before beginning of operation and save it against disconnecting. For leakage currents I_L¹ ≤10 mA the PE conductor must have a KU value² of 4.5³; for leakage currents I_L >10 mA the PE conductor must have a KU value of 6⁴.
- Output chokes and output filters must be protected in the application against impermissible exceeding of the component temperature.
- The converter output frequency must be within the specified range to avoid resonances and uncontrolled warming of the output chokes and output filters.
- Because the product can become very hot during operation, there is the risk of burns if touched. The product can remain hot for some time after the power is switched off!

- 2) The KU value (symbol KU) is a classification parameter of safety-referred failure types designed to ensure protection against hazardous body currents and excessive heating.
- A value of KU = 4.5 with respect to interruptions is attained with: a) permanently connected protective earth connection ≥1.5 mm² and b) a protective earth connection ≥2.5 mm² via connectors for industrial equipment (IEC 60309-2)
- 4) KU = 6 with respect to interruptions is achieved for fixed-connection lines $\geq 10 \text{ mm}^2$ where the type of connection and installation correspond to the requirements for PEN conductors as specified in relevant standards.

¹⁾ I_L = leakage current let-go



B84143B*S020/S021/S024

for converters and power electronics

The table below summarizes the safety instructions that must be observed without fail. A detailed description can be found in the relevant chapters of the databook.

Торіс	Instructions	Reference chapter (data book), paragraph
Selecting a filter	When selecting a filter, it is mandatory to observe the rated data of the equipment (such as its rated input current, rated voltage, harmonic content etc.) as well as the derating instructions in Chapters 9 and 10.	Selection guide for converter filters
Rated voltage	When power distribution systems deviating from the symmetric TN-S system is to check the suitability of the filters and the allowed voltages including the fault cases.	Power distribution systems, 7
Protection from residual voltages Discharge resistors	Active parts must be discharged within 5 s to a voltage of less than 60 V (or 50 μ C). If this limit cannot be observed due to the operating mode, the hazardous point must be permanently marked in a clearly visible way.	
	Filters which are not permanently connected (e.g. when the test voltage is applied to the filter at the incoming goods inspection) must be discharged after the voltage has been switched off.	Safety regulations, 6.2
Installing and removing of filters Installation	When installing and removing our filters, a voltage-free state must be set up and secured with observance of the five safety rules described in EN 50110-1.	, ,
Use in IT systems	The special features of the IT system ("first fault case" and other fault cases) shall be observed.	Power distribution system (network types), 7.6
Safety notes on leakage currents	The filter leakage currents specified in the data book are intended for user information only.The maximum leakage current of the entire electrical equipment or appliance has to be limited for safety reasons. Please obtain the applicable limits for your application from the relevant regulations, provisions and standards.	8.4 Leakage current,
Voltage derating Hazards caused by overloading the filters	If the permissible limits for the higher-frequency voltages at the filter are exceeded, the filter may be damaged or destroyed.	Voltage derating, 9.8
Current derating at elevated ambient temperatures	Non-observance of the current derating may lead to overheating and consequently represents a fire hazard.	-



B84143B*S020/S021/S024

for converters and power electronics

Торіс	Instructions	Reference chapter (data book), paragraph
Protective earth connection at operating currents >250 A	For operating currents greater than 250 A, we recommend the PE connection to be set up between the feed (filter: line) and output (filter: load) not via the PE terminal bolt in the filter housing.	instructions,
Mounting position	Note the mounting position of the filters! It must always be ensured that natural convection is not impaired.	
Long motor cables	Long motor cables cause parasitic currents in the installation. The cable lengths indicated for the output chokes and output filters serve for orientation. The user must check the technical parameters and especially the choke temperatures for the respective application.	Mounting instructions, point 15

Display of ordering codes for TDK Electronics products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications, on the company website, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.

Detailed information can be found on the Internet under www.tdk-electronics.tdk.com/orderingcodes.



for converters and power electronics

Symbols and terms

B84143B*S020/S021/S024

Symbol	English	German
α	Insertion loss	Einfügungsdämpfung
C _R	Rated capacitance	Bemessungskapazität
C _x	Capacitance X capacitor	Kapazität X-Kondensator
C _Y	Capacitance Y capacitor	Kapazität Y-Kondensator
ΔV	Voltage drop (input to output)	Spannungsabfall im Filter
dv/dt	Rate of voltage rise	Spannungsanstiegsgeschwindigkeit
f	Frequency	Frequenz
f _M	Converter output frequency	Motorfrequenz
f _P	Pulse frequency	Pulsfrequenz
f _R	Rated frequency	Bemessungsfrequenz
f _{res}	Resonant frequency	Resonanzfrequenz
I _C	Current through capacitor	Strom durch Kondensator
I _{LK}	Filter leakage current	Filter-Ableitstrom
I _{max}	Maximum current	Maximalstrom
I _N	Nominal current	Nennstrom
I _{op}	Operating current (design current)	Betriebsstrom
l _{pk}	Rated peak withstand current	Bemessungs-Stoßstromfestigkeit
i i	Capacitive reactive current	Kapazitiver Blindstrom
I _q I _R	Rated current	Bemessungsstrom
	Interference current	Störstrom
I _S I	Inductance	Induktivität
	Rated inductance	Bemessungsinduktivität
L _R	Stray inductance	Streuinduktivität
L _{stray} P _L	Power loss	Verlustleistung
R	Resistance	Widerstand
R _{is}	Insulation resistance	Isolationswiderstand
	DC resistance, typical value	Gleichstromwiderstand, Richtwert
R _{typ} T _A	Ambient temperature	Umgebungstemperatur
	Upper category temperature	Obere Kategorietemperatur
T _{max} T		Untere Kategorietemperatur
I _{min} T _R	Lower category temperature Rated temperature	Bemessungstemperatur
	Refered voltage drop in %	Bezogener Spannungsabfall in %
u _k V _{eff}	RMS voltage	Effektivspannung
	Voltage drop	Spannungsabfall
V _K	C	Spannung Phase zu Erdpotential
V _{LE}	Voltage line to earth; voltage line to ground Nominal voltage	Nennspannung
V _N	•	
V _R	Rated voltage	Bemessungsspannung
V _{peak}	Peak voltage	Spitzenspannung
V _{test}	Test voltage	Prüfspannung
V _x	Voltage over X capacitor	Spannung über X-Kondensator
V _Y	Voltage over Y capacitor	Spannung über Y-Kondensator
X _L	Inductive reactance	Induktiver Blindwiderstand
Z	Impedance	Scheinwidertand
IZI	Impedance, absolute value	Scheinwiderstand (Betragswert)



The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.tdk-electronics.tdk.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- 6. Unless otherwise agreed in individual contracts, all orders are subject to our General Terms and Conditions of Supply.



Important notes

- 7. Our manufacturing sites serving the automotive business apply the IATF 16949 standard. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that only requirements mutually agreed upon can and will be implemented in our Quality Management System. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.
- 8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.tdk-electronics.tdk.com/trademarks.

Release 2018-10

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by EPCOS manufacturer:

Other Similar products are found below :

5B1 6609019-3 6609026-5 6609030-6 6609063-2 6609973-2 7-1609090-5 F1500CA06 F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B-1-06 FN2080B-10-06 FN2090A-1-06 FN2410H-32-33 FN2410H-80-34 FN2412H-16-44 FN420-1-13 FP144 8-6609089-0 12-MMB-030-11-D B84144A0050R120 B84144A90R120 20B1 RSEL-2001A 2B1 LP183 1-6609070-1 F1500CA10 1B1 FN2020A-10-06 FN2020B-3-06 FN2060A-3-06 FN2070A-16-06 FN2070B-16-08 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-25-33 FN2412H-8-44 FN610R-3-06 20EHZ7 20K1 30B6 30BCF10R 3K1