



DFS





Voltage 600 V to 1000 V

Current 1.0 Amp. at 40°C

FEATURES

- Ideal for automated placement
- High forward surge current capability
- Solder dip 260°C, 10s





 Meets MSL level 1, per J-STD-020, LF maximum peak of 250° C

MECHANICAL DATA

• Case: DFS

Epoxy meets UL 94V-0 flammability rating.

- Polarity: As marked on body.
- **Terminals:** Matte tin plated leads, solderable per MIL-STD-750 Method 2026, J-STD-002 and JESD22-B102. Consumer grade, meets JESD 201 class 1A whisker test.

TYPICAL APPLICATIONS

Used in ac-to-dc bridge full wave rectification for SMPS, lighting ballaster, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

Maximun Ratings and Electrical Characteristics at 25°C

			DF06S	DF08S	DF10S
Marking code		DF06S	DF08S	DF10S	
V_{RRM}	Peak recurrent reverse voltage (V)		600	800	1000
V _{RMS}	Maximum RMS voltage (V)		420	560	700
I _{F (AV)}	Forward current at Tamb = 40 °C	R Load	1.0 A		
		C Load	0.8 A		
I _{FSM}	8.3 ms. peak forward surge current (Jedec Method)	t	50 A		
I ² t	I ² t value for fusing (t = 8.3 ms)		10 A ² sec		
T _j	Operating temperature range		– 55 to + 150 °C		
T _{stg}	Storage temperature range		− 55 to + 150 °C		

Electrical Characteristics at Tamb = 25 °C

V_{F}	Max. forward voltage drop per element at $I_F = 1 A$		1.1 V
I _R	Max. reverse current per	and Ta = 25 °C	10 μΑ
	element V _{RRM} d.c.	and Ta = 125 °C	500 μΑ
R _{thj-a}	Maximum thermal resistance junction to ambient (*)		65 °C/W

(*) NOTE: Thermal Resistance from junction to ambient PCB mounted P.C. Board with 12 mm. sq. Copper

www.fagorelectronica.com Document Name: dfs


Version: Mar-12 Page Number: 1/4



Ordering information


PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
DF06S TR	TR	13" diameter tape and reel	1,500	0.399


Package Outline Dimensions: (mm) DFS

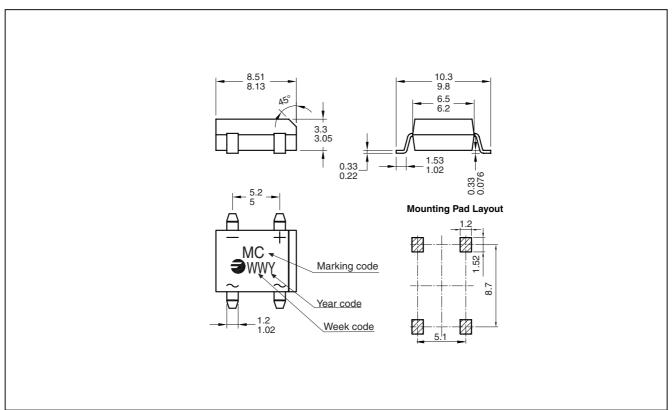




Ratings and Characteristics (Ta 25 °C unless otherwise noted)

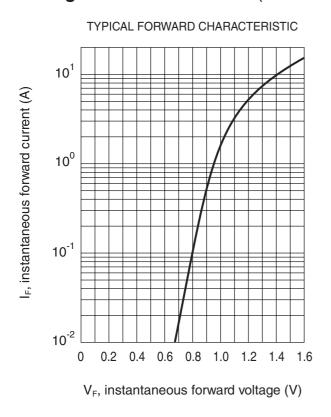

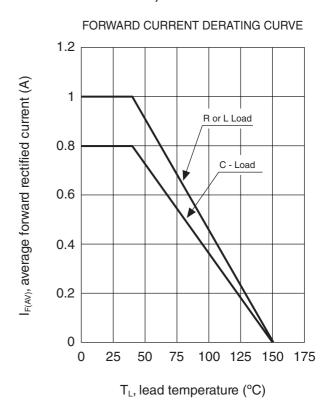

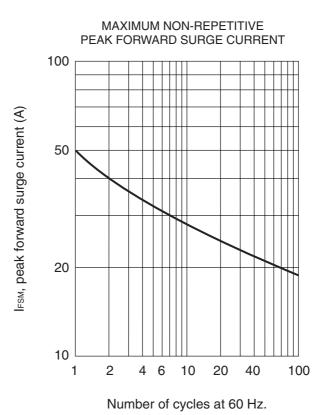



Disclaimer

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

Fagor Electrónica, S.Coop., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Fagor"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Fagor makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Fagor disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Fagor's knowledge of typical requirements that are often placed on Fagor products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Fagor's terms and conditions of purchase, including but nos limited to the warranty expressed therein.

Except as expressly indicated in writing. Fagor products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Fagor product could result in personal injury or death. Customers using or selling Fagor products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Fagor and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attomeys fees, even if such claim alleges that Fagor or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Fagor personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Fagor, Product names and markings noted herein may be trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bridge Rectifiers category:

Click to view products by Fagor manufacturer:

Other Similar products are found below:

MB2510 MB252 MB356G MB358G 90MT160KPBF GBJ1504-BP GBU10B-BP GBU15K-BP GBU4A-BP GBU4D-BP DB101-BP DF01

DF10SA-E345 KBPC50-10S RS405GL-BP GBJ1502-BP GBU6M 2KBB10 36MB140A TB102M MB1510 MB86 TL401G MDA920A2

TU602 TU810 MP5010W-BP MP501W-BP MP502-BP KBPC25-02 VS-110MT120KPBF VS-60MT80KPBF DB105-BP DF1510S VS
40MT160PAPBF VISKBU8K-E4/51 36MT100 GBU4G-BP GBU6B-E3/51 GSIB15A80-E3/45 DB104-BP D3SB60 TB354 26MT140

36MB40A GBJ2504-BP GBPC3504WL-1E4/51 26MB100A 110MT160KPBF B1S-G