



# Camera Breakout v1.4

The FLIR Lepton® Thermal Camera Breakout is an easy to interface to evaluation board to quickly evaluate the FLIR Lepton® Camera module. It is compatible with a number of low-cost ARM based evaluation boards such as the NUCLEO-F401RE. In addition it is easy to wire to any nonstandard pin outs as well such as the raspberry Pl..

#### **FEATURES**

- Input Voltage: 3 V to 5.5 V
- Space-Saving, (25 mm × 24 mm)
- Works with the FLIR Lepton® modules: 50 degree shuttered, 50 degree, and 25 degree
- Access to SPI and I2C camera module interfaces
- Provides 25-MHz reference clock
- Power Efficient 1.2 V core voltage
- Dual Low Noise LDO for 2.8 V voltage
- 32-pin Molex camera socket for Lepton® Module
- 100 mil header, pinout compatible with Arduino® headers
- PCB size and mounting holes same as standard Raspberry camera
- · Additional low profile .5mm FPC connector for embedded applications


# **APPLICATIONS**

- Thermal Imaging
- Motion Sensor
- · Night Vision
- Gesture Recognition



# **Lepton Specifications and Pinouts**

Description
5.5 V continuous
0° C to 55° C (over Vi range)
Camera Control Interface Clock, I2C
Camera Control Interface Data, I2C
3-5 V Supply input
Common Ground
Video Over SPI Slave Clock
Video Over SPI Slave Data Out
Video Over SPI Slave Data In
Video Over SPI Slave Chip Select (active LOW)

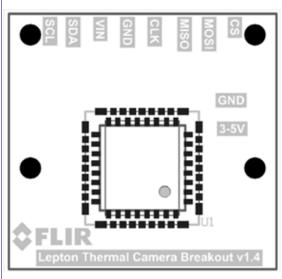

# 25mm 25mm 21mm 2mm hole

#### SANTA BARBARA

FLIR Systems, Inc. 70 Castilian Drive Goleta, CA 93117 USA PH: +1 805.964.9797

### EUROPE

FLIR Systems Luxemburgstraat 2 2321 Meer Belgium PH: +32 (0) 3665 5100

www.flir.com NASDAQ: FLIR

#### **PORTLAND**

Corporate Headquarters FLIR Systems, Inc. 27700 SW Parkway Ave. Wilsonville, OR 97070 USA PH: +1 866.477.3687

#### CHINA - SHANGHAI


FLIR Systems, Co., Ltd. K301-302, No.26 Lane 168, Daduhe Road, Putuo District, Shanghai 200062,P.R. China PH: +86-21-5169 7628

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2014 FLIR Systems, Inc. All rights reserved. (Created 11/21/14)



# **Application Information**

The figure below shows a typical application.

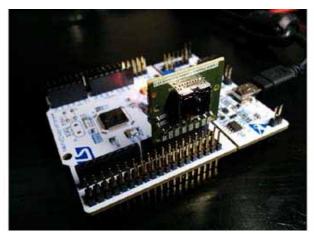

# **Getting Started**

A basic code example has been posted to the Pure Engineering github site at the following URL: https://github.com/PureEngineering/LeptonModule. Please Note that these are examples to get one started and not for use in final designs. Familiarity of programming and compiling are highly recommended.

# Support

For support that extends beyond this datasheet please consult the following google groups site at the following URL: https://groups.google.com/d/forum/flir-lepton Please search for your question before posting as your question may already be answered.


# **Additional Information**

All additional information about the breakout board, SDK's, Lepton® Datasheet, and Purchase Information will be maintained at the Following URL: <a href="http://www.pureengineering.com/projects/lepton">http://www.pureengineering.com/projects/lepton</a>

# **Example Application**

See the schematic on the following page for an example application.



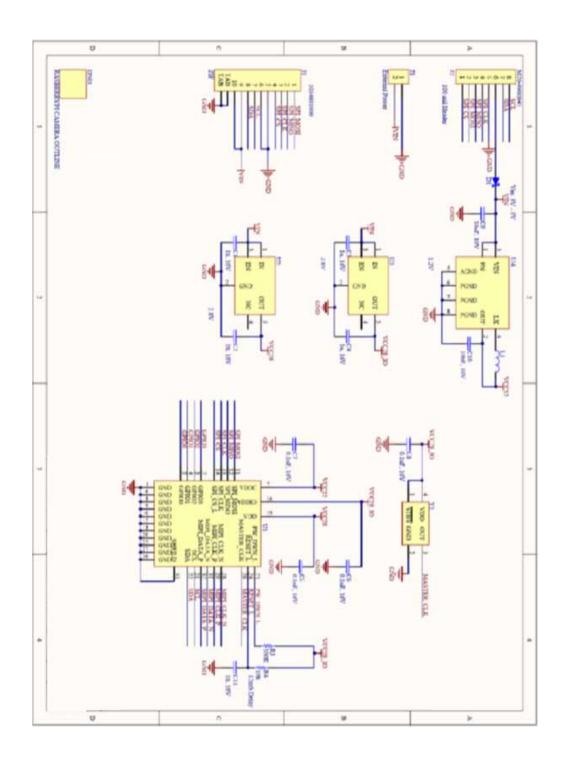



# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for flir systems manufacturer:

Other Similar products are found below:

1910582 CM74 CM82 CM174 MR10 T198484 TG165 72003-0303 CM55 FM100 MR40 DM91 FLIR ONE PRO LT IOS T197915 T198065 T198059 VSC80-A VSC80-2R VSS-30 VSA2-2 VSA2-2M-W VSA4-1M-W VSA4-1-W VSC58-30M T198066 T199064 T199066 T199019 78502-0201 78503-0201 T911633ACC 78506-0201 78504-0301 78505-0301 T199610 VS70-4 IRW-24PS MR13 MR10-2 CM94 EM54 CM72 TA72 T198485 CM44 TA11 ETS320 VSA2-2-W 74701-0104 T911689ACC