



# LM386 Low Voltage Audio Power Amplifier

## **General Description**

The LM386 is a power amplifier designed for use in low voltage consumer applications. The gain is internally set to 20 to keep external part count low, but the addition of an external resistor and capacitor between pins 1 and 8 will increase the gain to any value up to 200.

The inputs are ground referenced while the output is automatically biased to one half the supply voltage. The quiescent power drain is only 24 milliwatts when operating from a 6 volt supply, making the LM386 ideal for battery operation.


# Applications


- AM-FM radio amplifiers
- Portable tape player amplifiers
- Intercoms
- TV sound systems
- Line drivers
- Ultrasonic drivers
- Small servo drivers
- Power converters

### **Features**

- Battery operation
- Minimum external parts
- Wide supply voltage range: 4V-12V or 5V-18V
- Low quiescent current drain: 4 mA
- Voltage gains from 20 to 200
- Ground referenced input
- Self-centering output quiescent voltage
- Low distortion
- Available in 8 pin MSOP package

### **Equivalent Schematic and Connection Diagrams**

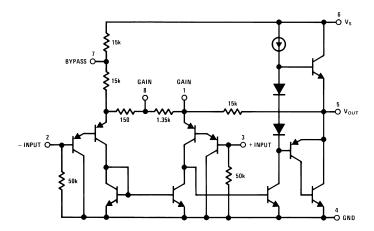







### Absolute Maximum Ratings (Note 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Supply Voltage		
(LM386N-1, -3, LM386M-1)	15V	
Supply Voltage (LM386N-4)	22V	Se
Package Dissipation (Note 3)		or SL
(LM386N)	1.25W	Th
(LM386M)	0.73W	(
Input Voltage	±0.4V	(
Storage Temperature	–65°C to +150°C	(
Operating Temperature	0°C to +70°C	(
Junction Temperature	+150°C	(
Soldering Information		(

Dual-In-Line Package	
Soldering (10 sec)	+260°C
Small Outline Package	
(SOIC and MSOP)	
Vapor Phase (60 sec)	+215°C
Infrared (15 sec)	+220°C
See AN-450 "Surface Mounting Methods ar on Product Reliability" for other methods of surface mount devices.	
Thermal Resistance	
$\theta_{JC}$ (DIP)	37°C/W
θ <sub>JA</sub> (DIP)	107°C/W
$\theta_{JC}$ (SO Package)	35°C/W
θ <sub>JA</sub> (SO Package)	172°C/W
$\theta_{JA}$ (MSOP)	210°C/W
$\theta_{JC}$ (MSOP)	56°C/W

### Electrical Characteristics (Notes 1, 2)

Parameter	Conditions	Min	Тур	Max	Units
Operating Supply Voltage (V <sub>S</sub> )					
LM386N-1, -3, LM386M-1, LM386MM-1		4		12	V
LM386N-4		5		18	V
Quiescent Current (I <sub>Q</sub> )	$V_{\rm S} = 6V, V_{\rm IN} = 0$		4	8	mA
Output Power (P <sub>OUT</sub> )					
LM386N-1, LM386M-1, LM386MM-1	$V_{S} = 6V, R_{L} = 8\Omega, THD = 10\%$	250	325		mW
LM386N-3	$V_{S} = 9V, R_{L} = 8\Omega, THD = 10\%$	500	700		mW
LM386N-4	$V_{s} = 16V, R_{L} = 32\Omega, THD = 10\%$	700	1000		mW
Voltage Gain (A <sub>v</sub> )	$V_{\rm S} = 6V, f = 1 \text{ kHz}$		26		dB
	10 µF from Pin 1 to 8		46		dB
Bandwidth (BW)	V <sub>S</sub> = 6V, Pins 1 and 8 Open		300		kHz
Total Harmonic Distortion (THD)	$V_{\rm S} = 6V, R_{\rm L} = 8\Omega, P_{\rm OUT} = 125 \text{ mW}$		0.2		%
	f = 1 kHz, Pins 1 and 8 Open				
Power Supply Rejection Ratio (PSRR)	$V_{\rm S}$ = 6V, f = 1 kHz, $C_{\rm BYPASS}$ = 10 $\mu$ F		50		dB
	Pins 1 and 8 Open, Referred to Output				
Input Resistance (R <sub>IN</sub> )			50		kΩ
Input Bias Current (I <sub>BIAS</sub> )	V <sub>S</sub> = 6V, Pins 2 and 3 Open		250		nA

Note 1: All voltages are measured with respect to the ground pin, unless otherwise specified.

Note 2: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. Electrical Characteristics state DC and AC electrical specifications under particular test conditions which guarantee specific performance limits. This assumes that the device is within the Operating Ratings. Specifications are not guaranteed for parameters where no limit is given, however, the typical value is a good indication of device performance.

Note 3: For operation in ambient temperatures above 25°C, the device must be derated based on a 150°C maximum junction temperature and 1) a thermal resistance of 107°C/W junction to ambient for the dual-in-line package and 2) a thermal resistance of 170°C/W for the small outline package.



# **Application Hints**

#### GAIN CONTROL

To make the LM386 a more versatile amplifier, two pins (1 and 8) are provided for gain control. With pins 1 and 8 open the 1.35 k $\Omega$  resistor sets the gain at 20 (26 dB). If a capacitor is put from pin 1 to 8, bypassing the 1.35 k $\Omega$  resistor, the gain will go up to 200 (46 dB). If a resistor is placed in series with the capacitor, the gain can be set to any value from 20 to 200. Gain control can also be done by capacitively coupling a resistor (or FET) from pin 1 to ground.

Additional external components can be placed in parallel with the internal feedback resistors to tailor the gain and frequency response for individual applications. For example, we can compensate poor speaker bass response by frequency shaping the feedback path. This is done with a series RC from pin 1 to 5 (paralleling the internal 15 k $\Omega$  resistor). For 6 dB effective bass boost: R  $\cong$  15 k $\Omega$ , the lowest value for good stable operation is R = 10 k $\Omega$  if pin 8 is open. If pins 1 and 8 are bypassed then R as low as 2 k $\Omega$  can be used. This restriction is because the amplifier is only compensated for closed-loop gains greater than 9.

#### INPUT BIASING

The schematic shows that both inputs are biased to ground with a 50 k $\Omega$  resistor. The base current of the input transistors is about 250 nA, so the inputs are at about 12.5 mV when left open. If the dc source resistance driving the LM386 is higher than 250 k $\Omega$  it will contribute very little additional offset (about 2.5 mV at the input, 50 mV at the output). If the dc source resistance is less than 10 k $\Omega$ , then shorting the unused input to ground will keep the offset low (about 2.5 mV at the input, 50 mV at the output). For dc source resistances between these values we can eliminate excess offset by putting a resistor from the unused input to ground, equal in value to the dc source resistance. Of course all offset problems are eliminated if the input is capacitively coupled.


When using the LM386 with higher gains (bypassing the 1.35 k $\Omega$  resistor between pins 1 and 8) it is necessary to bypass the unused input, preventing degradation of gain and possible instabilities. This is done with a 0.1  $\mu F$  capacitor or a short to ground depending on the dc source resistance on the driven input.




LM386

# **Typical Performance Characteristics**


Quiescent Supply Current vs Supply Voltage




Power Supply Rejection Ratio (Referred to the Output) vs Frequency




Peak-to-Peak Output Voltage Swing vs Supply Voltage




Voltage Gain vs Frequency




Device Dissipation vs Output




**Distortion vs Frequency** 




Device Dissipation vs Output Power —  $8\Omega$  Load



**Distortion vs Output Power** 




Device Dissipation vs Output Power — 16 $\Omega$  Load







# **Typical Applications**




Amplifier with Gain = 50

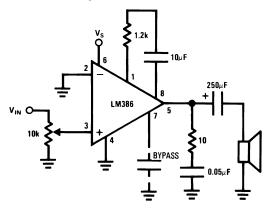





Low Distortion Power Wienbridge Oscillator

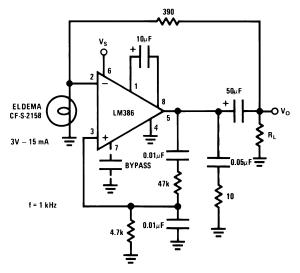

Amplifier with Bass Boost

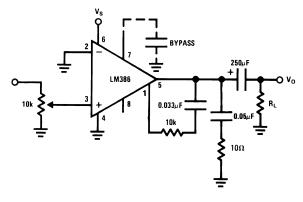


Square Wave Oscillator

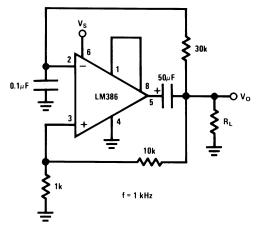




### Typical Applications (Continued)



#### Frequency Response with Bass Boost



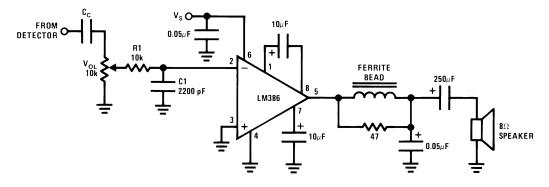

Note 4: Twist Supply lead and supply ground very tightly.

Note 5: Twist speaker lead and ground very tightly.


**Note 6:** Ferrite bead in Ferroxcube K5-001-001/3B with 3 turns of wire.

Note 7: R1C1 band limits input signals.

Note 8: All components must be spaced very closely to IC.



### PACKAGE

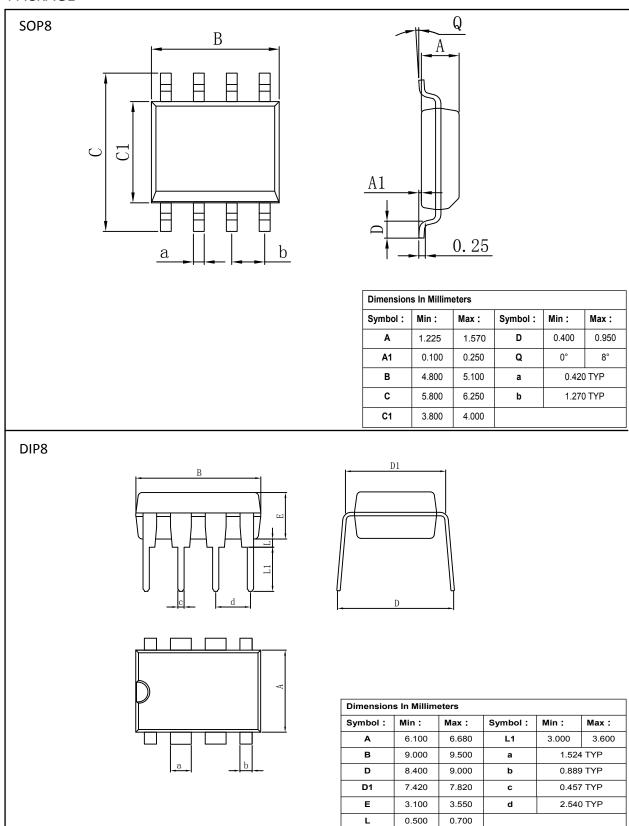



Important statement:

Huaguan Semiconductor Co,Ltd. reserves the right to change the products and services provided without notice. Customers should obtain the latest relevant information before ordering, and verify the timeliness and accuracy of this information.

Customers are responsible for complying with safety standards and taking safety measures when using our products for system design and machine manufacturing to avoid potential risks that may result in personal injury or property damage.

Our products are not licensed for applications in life support, military, aerospace, etc., so we do not bear the consequences of the application of these products in these fields.

Our documentation is only permitted to be copied without any tampering with the content, so we do not accept any responsibility or liability for the altered documents.

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Amplifiers category:

Click to view products by HGSEMI manufacturer:

Other Similar products are found below :

LV47002P-E AZ386MTR-E1 NCP2811AFCT1G NCP2890AFCT2G IS31AP4915A-QFLS2-TR TDA1591T AS3561-BWLT-500 TDA7563AH TDA7850H STK433-070GN-E NCP2892BFCT2G NCP2990FCT2G TS2012EIJT NCP2809BMUTXG NJW1157BFC2 TPA6201A1ZQVR LV49821VH-MPB-H LV4904V-TLM-E IS31AP4996-GRLS2-TR NCP2823BFCT1G LA4450L-E IS31AP2036A-CLS2-TR TDA7563ASMTR AS3561-DWLT MP1720DH-12-LF-P SABRE9601K THAT1646W16-U PAM8965ZLA40-13 TSDP10XX1NLGXZBX TSDP11XX1NBGIZBX TSDP10XX1NBGIZBX NJM4580CV-TE1 BD5638NUX-TR BD37543FS-E2 BD3814FV-E2 TPA3110LD2PWPR AS3435-EQFP VA2218TSG28 TAS5766MRMTR TPA3140D2PWPR TS2007EIJT IS31AP2005-DLS2-TR SSM2518CPZ-R7 TAS5766MDCA TFA9879HN/N1,118 AS3410-EQFP-500 FDA4100LV TPA3140D2PWP TPA6120A2RGYR BD3812F-E2