

Features


- * Ideal for surface mount applications
- * Easy pick and place
- * Built-in strain relief
- * Low forward voltage drop



Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)			
DSK32-DSK310	SOD-123FL	K3 *	3000			

★:From 2-10



SOD-123FL

Maxmim Ratings (Ta=25 unless otherwise noted)

60Hz resistive or inductive load, for capacitive load, derate by 20 %

TYPE NUMBER	K32	K33	K34	K35	K36	K38	K39	K310	UNITS
Maximum Recurrent Peak Reverse Voltage		30	40	50	60	80	90	100	V
Maximum RMS Voltage		21	28	35	42	56	63	70	V
Maximum DC Blocking Voltage		30	40	50	60	80	90	100	V
Maximum Average Forward Rectified Current									
At T _L =100°C		3.0							
Peak Forward Surge Current, 8.3 ms single half sine-wave									
superimposed on rated load (JEDEC method)		80							
Maximum Instantaneous Forward Voltage at 3.0A		0.55		0.70		0.85		V	
Maximum DC Reverse Current Ta=25°C	0.1 0.02					mA			
at Rated DC Blocking Voltage Ta=100°C		5					2		mA
Typical Junction Capacitance (Note1)		300							
Typical Thermal Resistance R JL (Note 2)		10							
Operating Temperature Range T _J		-65 —+150							
Storage Temperature Range Tsτc	-65—+150								°C

NOTES:

- 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
- 2. Thermal Resistance Junction to Lead.



Typical Characteristics

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

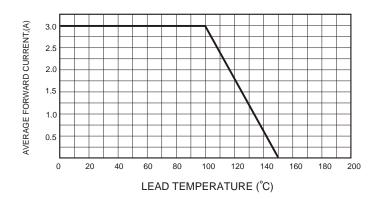



FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT



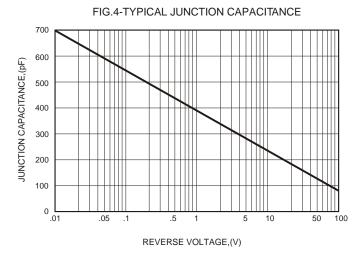


FIG.2-TYPICAL FORWARD






FIG.5 - TYPICAL REVERSE



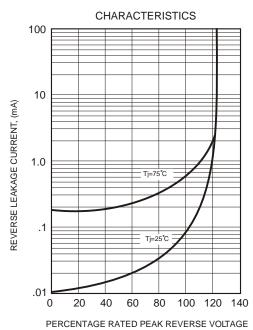

SOD-123FL Package Outline Dimensions

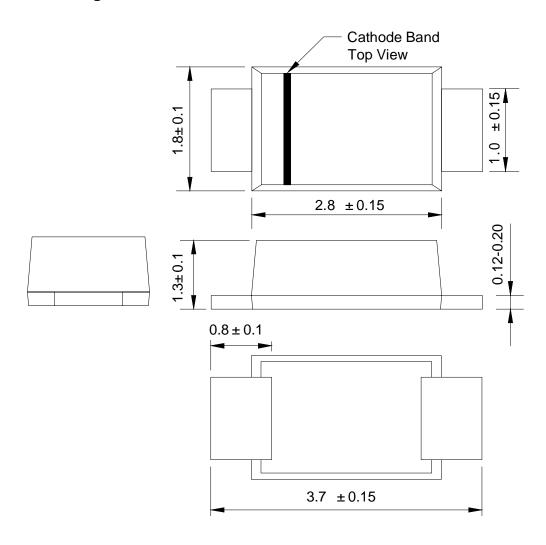



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.

 HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Schottky Diodes & Rectifiers category:

Click to view products by HXY MOS manufacturer:

Other Similar products are found below:

MA4E2039 MA4E2508M-1112 MBR1545CT MMBD301M3T5G RB160M-50TR D83C BAS16E6433HTMA1 BAT 54-02LRH E6327

NRVBAF360T3G NSR05F40QNXT5G NTE555 JANS1N6640 SK310-T SS3003CH-TL-E GA01SHT18 CRS10I30A(TE85L,QM

MA4E2501L-1290 MBRA140TRPBF MBRB30H30CT-1G BAT 15-04R E6152 JANTX1N5712-1 DMJ3940-000 SB007-03C-TB-E

SK33B-TP NRVBB20100CTT4G NRVBM120LT1G NTSB30U100CT-1G VS-6CWQ10FNHM3 CRG04(T5L,TEMQ) ACDBA1100LR-HF

ACDBA1200-HF ACDBA240-HF ACDBA3100-HF CDBQC0530L-HF CDBQC0240LR-HF ACDBA260LR-HF ACDBA1100-HF

MA4E2502L-1246 10BQ015-M3/5BT NRVBM120ET1G CRS08TE85LQM PMAD1108-LF B120Q-13-F 1N5819T-G B0530WSQ-7-F

PDS1040Q-13 B160BQ-13-F SDM05U20CSP-7 B140S1F-7 HSM560Je3/TR13