


FEATURES

- Surge overload rating 60 amperes peak
- Ideal for printed circuit board
- Plastic material has underwriters laboratory flammability classification 94V-0
- Mounting position: Any



GBP



Package Marking and Ordering Information


Product ID	Pack	Marking	Qty(PCS)		
GBP6005-GBP610	GBP		500		


MAXIMUM RATINGS (Ta=25 unless otherwise noted)


CHARACTERISTICS	SYMBOL	GBP 6005	GBP 601	GBP 602	GBP 604	GBP 606	GBP 608	GBP 610	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	VRMS	30	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current @ Ta=50℃	I(AV)	6.0							А
Peak Forward Surage Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load	İFSM	60							Α
Maximum Forward Voltage Drop Per Bridge Element at 2.0A Peak	VF	1.1							V
Maximum Reverse Current at Rated DC Blocking Voltage Per Element	lr	10.0							
Maximum Reverse Current at Rated DC Blocking Voltage Per Element TA=100°C	lr	1.0							
Operating Temperature Range	TJ	-55 to +150							$^{\circ}$
Storage Temperature Range	Tstg	-55 to +150							${\mathbb C}$



Rating and Characteristic Curves (TA=25°C Unless otherwise noted)












FIG.5-TYPICAL REVERSE CHARACTERISTICS





GBP Package Outline Dimensions

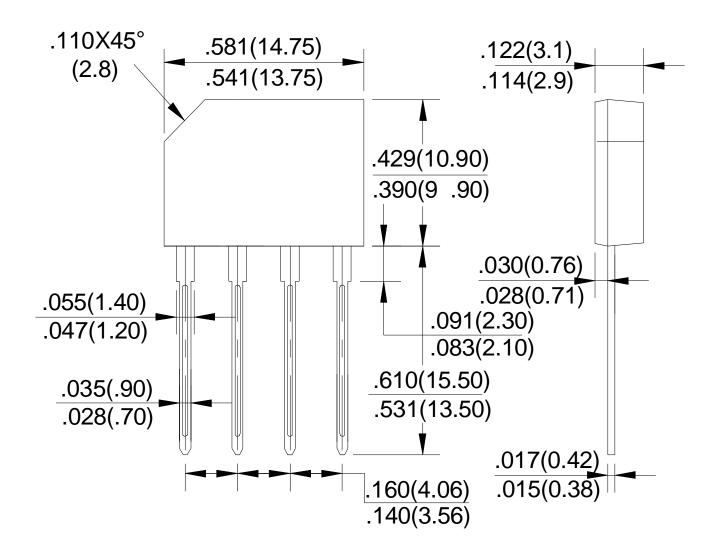



Attention

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.

 HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bridge Rectifiers category:

Click to view products by HXY MOS manufacturer:

Other Similar products are found below:

MB2510 MB252 MB356G MB358G 90MT160KPBF GBJ1504-BP GBU10B-BP GBU15K-BP GBU4A-BP GBU4D-BP GBU6B-E3/45

DB101-BP DF01 DF10SA-E345 BU1508-E3/45 BU1510-E3/45 KBPC50-10S RS405GL-BP GBJ1502-BP GBU6M GSIB1520-E3/45

2KBB10 36MB140A TB102M MB1510 MB86 TL401G MDA920A2 TU602 TU810 MP5010W-BP MP501W-BP MP502-BP

BR84DTP204 BU1508-E3/51 KBPC25-02 VS-110MT120KPBF VS-2KBB60 VS-60MT120KPBF VS-60MT80KPBF DB105-BP DF1510S

VS-40MT160PAPBF VISKBU8K-E4/51 36MT100 GBU4G-BP GBU6B-E3/51 DF15005S-E3/77 GSIB15A80-E3/45 DB104-BP