



NPN Silicon Digital Transistor

- Built in bias resistor (R_1 = 2.2 k Ω , R_2 = 10 k Ω)
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101





Туре	Marking	Pin	Pin Configuration Package		
BCR505	XWs	1=B	2=E	3=C	SOT23

Maximum Ratings

Junction - soldering point¹⁾

Parameter	Symbol	Value	Unit	
Collector-emitter voltage	V _{CEO}	50	V	
Collector-base voltage	V _{CBO}	50		
Input forward voltage	V _{i(fwd)}	20		
Input reverse voltage	V _{i(rev)}	5		
Collector current	I _C	500	mA	
Total power dissipation-	P _{tot}	330	mW	
<i>T</i> _S ≤ 79 °C				
Junction temperature	T _i	150	°C	
Storage temperature	T _{stg}	-65 150		
Thermal Resistance				
Parameter	Symbol	Value	Unit	

¹For calculation of R_{thJA} please refer to Application Note AN077 (Thermal Resistance Calculation)

K/W

≤ 215

R_{thJS}




Parameter	Symbol	Values			Unit
		min.	typ.	max.	1
DC Characteristics			,		
Collector-emitter breakdown voltage	V _{(BR)CEO}	50	-	-	V
<i>I</i> _C = 100 μA, <i>I</i> _B = 0					
Collector-base breakdown voltage	V _{(BR)CBO}	50	-	-	
$I_{\rm C}$ = 10 µA, $I_{\rm E}$ = 0					
Collector-base cutoff current	I _{CBO}	-	-	100	nA
$V_{\rm CB} = 50 \text{ V}, I_{\rm E} = 0$					
Emitter-base cutoff current	I _{EBO}	-	-	0.65	mA
$V_{\rm EB}$ = 5 V, $I_{\rm C}$ = 0					
DC current gain-	h _{FE}	70	-	-	-
<i>I</i> _C = 50 mA, <i>V</i> _{CE} = 5 V					
Collector-emitter saturation voltage1)	V _{CEsat}	-	-	0.3	V
<i>I</i> _C = 50 mA, <i>I</i> _B = 2.5 mA					
Input off voltage	V _{i(off)}	0.4	-	1	
<i>I</i> _C = 100 μA, <i>V</i> _{CE} = 5 V					
Input on voltage	V _{i(on)}	0.5	-	1.4]
<i>I</i> _C = 10 mA, <i>V</i> _{CE} = 0.3 V					
Input resistor	R ₁	1.5	2.2	2.9	kΩ
Resistor ratio	R ₁ /R ₂	0.19	0.22	0.24	-
AC Characteristics			_		
Transition frequency	f _T	-	100	-	MHz
$I_{\rm C}$ = 50 mA, $V_{\rm CE}$ = 5 V, f = 100 MHz					

Electrical Characteristics at T_{Δ} = 25°C, unless otherwise specified


¹Pulse test: t < 300 μ s; D < 2%



DC current gain $h_{\text{FE}} = f(l_{\text{C}})$ $V_{\text{CE}} = 5 \text{ V}$ (common emitter configuration)

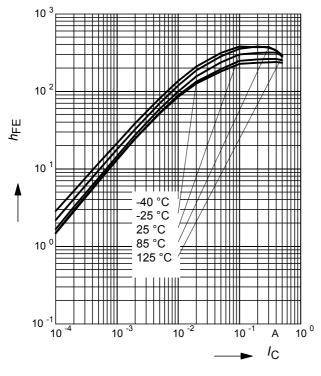


Input on Voltage $V_{i(on)} = f(I_C)$ $V_{CE} = 0.3V$ (common emitter configuration)

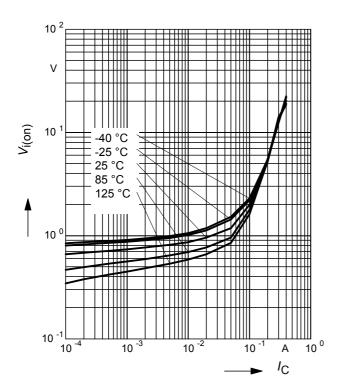


Collector-emitter saturation voltage

 $V_{\text{CEsat}} = f(I_{\text{C}}), I_{\text{C}}/I_{\text{B}} = 20$

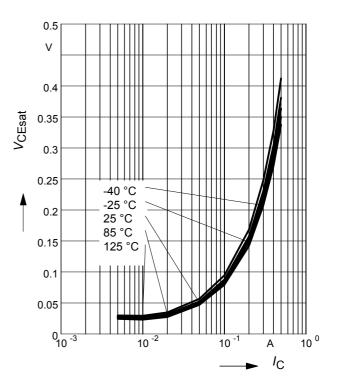


Input off voltage $V_{i(off)} = f(I_C)$ $V_{CE} = 5V$ (common emitter configuration)

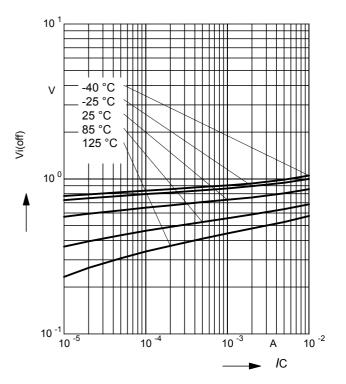




Total power dissipation $P_{tot} = f(T_S)$


Permissible Pulse Load $R_{\text{thJS}} = f(t_p)$

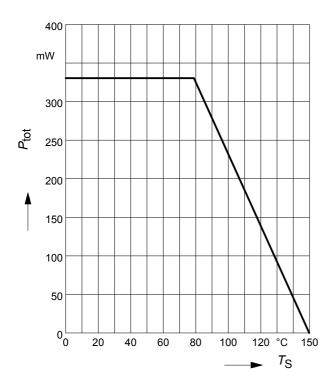


Permissible Pulse Load

 $P_{\text{totmax}}/P_{\text{totDC}} = f(t_{p})$

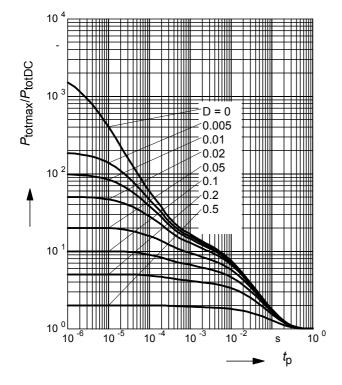

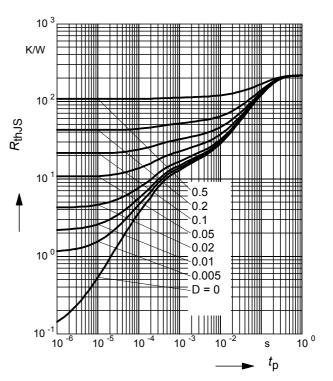



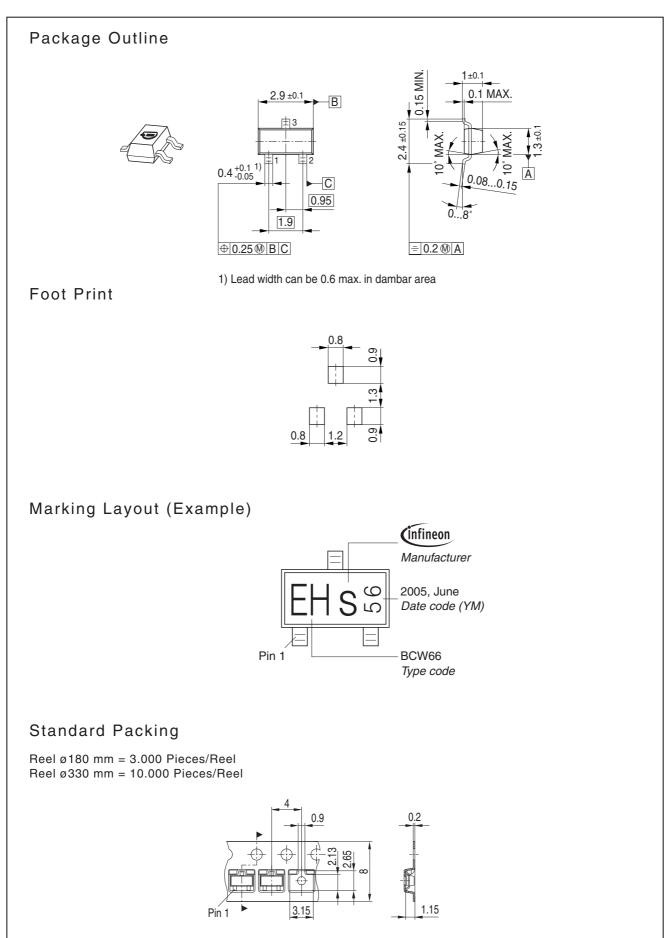



Edition 2009-11-16

Published by Infineon Technologies AG 81726 Munich, Germany

© 2009 Infineon Technologies AG All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (<<u>www.infineon.com</u>>).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - Pre-Biased category:

Click to view products by Infineon manufacturer:

Other Similar products are found below :

RN1607(TE85L,F) DTA124GKAT146 DTA144WETL DTA144WKAT146 DTC113EET1G DTC115TETL DTC115TKAT146 DTC124TETL DTC144ECA-TP DTC144VUAT106 MUN5241T1G BCR158WH6327XTSA1 NSBA114TDP6T5G NSBA143ZF3T5G NSBC114YF3T5G NSBC123TF3T5G SMUN5235T1G SMUN5330DW1T1G SSVMUN5312DW1T2G RN1303(TE85L,F) RN4605(TE85L,F) TTEPROTOTYPE79 DDTC114EUAQ-7-F EMH15T2R SMUN2214T3G NSBC114TF3T5G NSBC143ZPDP6T5G NSVMUN5113DW1T3G SMUN5230DW1T1G SMUN5133T1G SMUN2214T1G DTC114EUA-TP NSBA144EF3T5G NSVDTA114EET1G 2SC2223-T1B-A 2SC3912-TB-E SMUN5237DW1T1G SMUN5213DW1T1G SMUN5114DW1T1G SMUN2111T1G NSVDTC144EM3T5G DTC124ECA-TP DTC123TM3T5G DTA114ECA-TP DTA113EM3T5G DCX115EK-7-F DTC113EM3T5G NSVMUN5135DW1T1G NSVDTC143ZM3T5G SMUN5216DW1T1G