

Ultra+ (3LR12)

4.5V




Specifications

Classification:	"Alkaline"
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No Added Mercury or Cadmium
Designation:	IEC-3LR12
Nominal Voltage:	4.5 volts
Operating Temp:	-18°C to 55°C
Typical Weight:	163 grams
Typical Volume:	77 cubic centimeters
Jacket:	Plastic Label
Terminals:	Spring Clips
Shelf Life:	7 years


Industry Standard Dimensions

(millimeters)

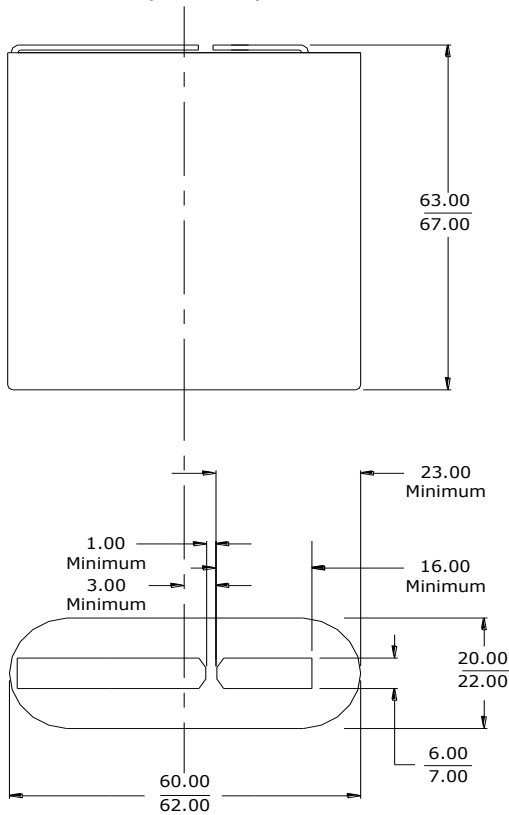


Industry Standard Tests (21°C)

FLASHLIGHT
20 ohm 1 hr/day

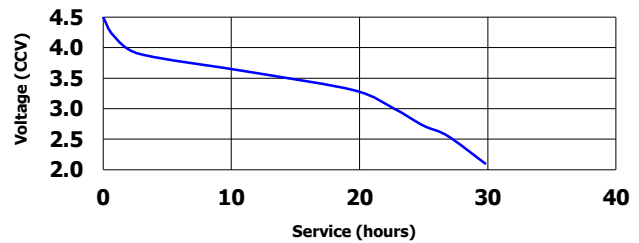


RADIO
220 ohm 4 hrs/day

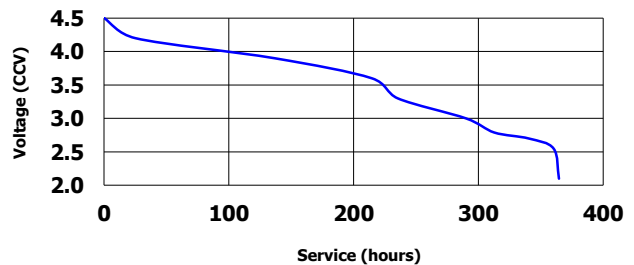

Typical Discharge Characteristics (21°C)

3.9 ohm Continuous Discharge

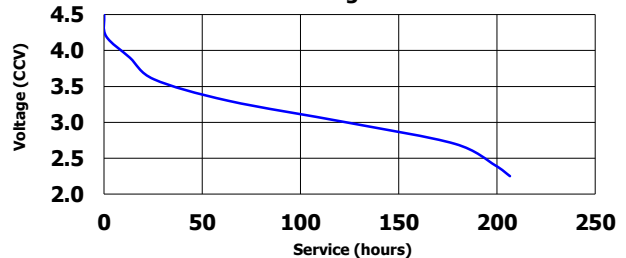

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [energizer manufacturer](#):

Other Similar products are found below :

[1215F2X3](#) [E11A B2](#) [LR43 186](#) [AC13](#) [AC675](#) [3LR12](#) [603298](#) [625304](#) [638006](#) [639830](#) [S9025](#) [7638900426687](#) [7638900414660](#) [HARD CASE RECHARGEABLE](#) [HARD CASE PRO MULTI USE](#) [HCHD311](#) [S9029](#) [639826](#) [603386](#) [HARD CASE PROFF 4AA](#) [HARDCASE PRO HEADLIGHT](#) [639618](#) [RCLINM2WR](#) [S8865](#) [S8707](#) [S8100](#) [7638900424478](#) [7638900313130](#) [626177](#) [E300116200](#) [E300280600](#) [639838](#) [HARDCASE PRO WORK LIGHT](#) [603305](#) [METAL LED 6AA](#) [S8864](#) [HDD32E](#) [MS2AALED](#) [ENERGIZER® 2-IN-1 LANTERN HANDHELD](#) [E300124200](#) [E300171700](#) [ENFFL81E](#) [E300112600](#) [633474](#) [HDA32E](#) [7638900421422](#) [HARD CASE PRO PIVOT](#) [HCSP61E](#) [7638900424485](#) [HDC32E](#)