


toggle shown in pos. 2

P / N	SWITCH FUNCTION	
STM 206 N-RA	ON - ON	
TERM. CONN.	1-2 4-5	2-3 5-6

CIRCUIT DIAGRAM



P.C.B. LAYOUT

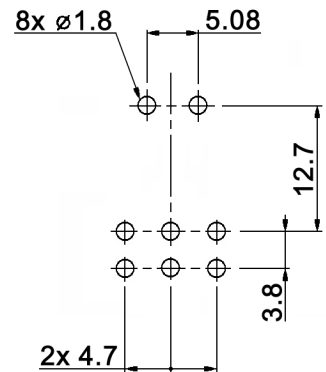

Specifications:

- Contact rating: 6A, 125V AC; 3A, 250V AC
- Contact resistance: 20mOhm max. (1.5mA, 200µV AC; 1kHz)
- Insulation resistance: 1 000MOhm min. at 500V DC
- Dielectric strength: 1 000V AC (between terminals)
1 500V AC (between terminals and ground) for 1 minute
- Operating temperature: -20°C to +80°C
- Mechanical life: 100 000 cycles min.
- Electrical life: 25 000 cycles min.
- Operating force: 2.5 +/-1.2N (250 +/-120gf)
- Material: Case: diallyl phthalate resin, green
Fixed terminal: brass, silver plated
Common terminal: brass, silver plated
Plunger: brass, chrome plated
Bushing: brass, nickel plated
Frame: stainless steel
Plate: brass, tin plated
Contact: silver, silver plated



Tolerances: ±0.15mm	Date	Name
	03/11	dr
Modifications	Date	Name

STM 206 N-RA

knitter-switch

30 23 26

Page

1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Toggle Switches](#) category:

Click to view products by [Knitter-Switch](#) manufacturer:

Other Similar products are found below :

[8A1-C-222](#) [60012L](#) [6006L](#) [6663](#) [7101MD9V30GE](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#)
[7201MD9AVBE](#) [7301K38](#) [7306K36](#) [7310K36](#) [7314K36](#) [7506K4](#) [7592K6](#) [7691K14](#) [7700K1](#) [8396K108](#) [8824K14](#) [8828K13](#) [G2VX](#) [G3VX](#)
[PS83-121G](#) [A101MD9AB04](#) [A101SD9AB04](#) [A101SDCQ04](#) [A103SD9AQ04](#) [A107TZB04](#) [A123P32YZQ](#) [A123S1YZG](#) [A127S1YCQ](#) [1-](#)
[1825192-0](#) [A131S1YZQ](#) [A201SCWZB04](#) [A207SYCB04](#) [A208J61ZQ0004](#) [A221K12KAG](#) [A221S1YZQ](#) [A221T1TCQ](#) [A232K12KZQ](#)
[A232M1YCQ](#) [A323S1CWZQ](#) [A423S1CWZG-M8](#) [A423S1YZQ](#) [12149A-3V](#) [12156AX408](#) [12147AGKX679](#) [12149AD2G0383VX408](#)