



# Silicon Carbide Schottky Rectifier Bridge

in ISOPLUS i4-PAC™

$$V_{RRM} = 1200 \text{ V}$$

$$I_{D(AV)M} = 7 \text{ A}$$



## Rectifier Bridge

Symbol	Conditions	Maximum Ratings	
$V_{RRM}$		1200	V
$I_{FAV}$	$T_C = 90^\circ\text{C}$ ; sine $180^\circ$ (per diode)	3	A
$I_{D(AV)M}$	$T_C = 90^\circ\text{C}$ (bridge)	7	A
$I_{FSM}$	$T_{VJ} = 25^\circ\text{C}$ ; $t = 10 \text{ ms}$ ; sine 50 Hz	12	A
$P_{tot}$	$T_C = 25^\circ\text{C}$ (per diode)	37	W

## Features

- Silicon Carbide Schottky Diodes
  - no reverse recovery at turn off - only charge of junction capacity - soft turn off waveform
  - no forward recovery at turn on
  - switching behaviour independent of temperature
  - low leakage current
- ISOPLUS i4-PAC™ package
  - isolated back surface
  - low coupling capacity between pins and heatsink
  - enlarged creepage towards heatsink
  - application friendly pinout
  - high reliability
  - industry standard outline
  - UL registered E72873

Symbol	Conditions	Characteristic Values ( $T_{VJ} = 25^\circ\text{C}$ , unless otherwise specified)		
		min.	typ.	max.
$V_F$	$I_F = 4 \text{ A}$ ; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.7 2.4	V V
$I_R$	$V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.04	0.2 mA mA
$R_{thJC}$ $R_{thJS}$	(per diode)		6.2	4.1 K/W K/W

## Applications


- output rectifiers of high end switched mode power supplies
- other high frequency rectifiers

Data according to IEC 60747 referring to a single diode unless otherwise stated.

**Component**

Symbol	Conditions	Maximum Ratings	
$T_{VJ}$		-55...+175	°C
$T_{stg}$		-55...+125	°C
$V_{ISOL}$	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$	2500	V~
$F_c$	mounting force with clip	20...120	N

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$C_p$	coupling capacity between shorted pins and mounting tab in the case		40	pF
$d_s, d_A$	pin - pin	1.7		mm
$d_s, d_A$	pin - backside metal	5.5		mm
<b>Weight</b>			9	g

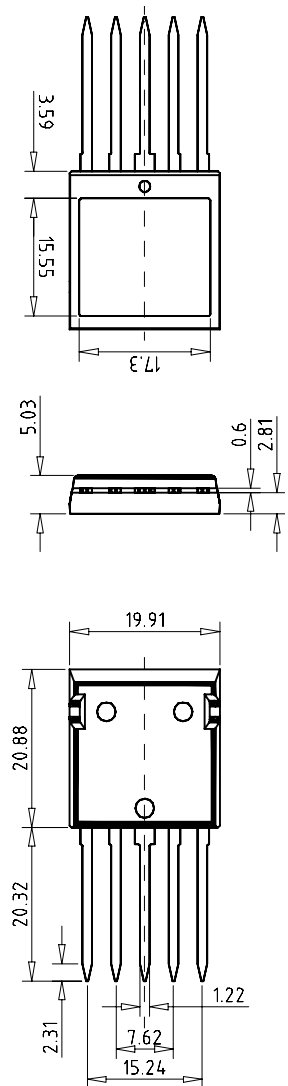**Dimensions in mm (1 mm = 0.0394")**


## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bridge Rectifiers](#) category:*

*Click to view products by [IXYS](#) manufacturer:*

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DF10SA-E345](#) [RMB2S](#) [RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#) [MP5010W-BP](#) [MP501W-BP](#) [MP502-BP](#) [BR1005-BP](#) [BR101-BP](#) [BU1006-E345](#) [BU12065S-E3/45](#) [BU1508-E3/51](#) [BU2006-E3/45](#) [BU2008-E345](#)