ECO-PAC ™
Three Phase Rectifier Bridge
with Fast Recovery Epitaxial Diodes (FRED)

I_{dAV} = 86 A
V_{RRM} = 600 V
t_{rr} = 35 ns

V_{RSM} V	V_{RRM} V	Typ
600	600	VUE 75-06NO7



Symbol	Conditions		Maximum Ratings	
I_{dAV} ①	T_C = 100°C, module		86	A
I_{dAVM}			90	A
I_{FSM}	T_{VJ} = 45°C	t = 10 ms (50 Hz), sine	250	A
	V_R = 0	t = 8.3 ms (60 Hz), sine	275	A
	$T_{VJ} = T_{VJM}$	t = 10 ms (50 Hz), sine	215	A
	V_R = 0	t = 8.3 ms (60 Hz), sine	235	A
I^2t	T_{VJ} = 45°C	t = 10 ms (50 Hz), sine	315	A^2s
	V_R = 0	t = 8.3 ms (60 Hz), sine	320	A^2s
	$T_{VJ} = T_{VJM}$	t = 10 ms (50 Hz), sine	230	A^2s
	V_R = 0	t = 8.3 ms (60 Hz), sine	230	A^2s
T_{VJ}			-40...+150	°C
T_{VJM}			150	°C
T_{stg}			-40...+125	°C
V_{ISOL}	50/60 Hz, RMS	t = 1 min	3000	V~
	$I_{ISOL} \leq$ 1 mA	t = 1 s	3600	V~
M_d	Mounting torque	(M4)	1.5-2/14-18	Nm/lb.in.
Weight	typ.		19	g

Symbol	Conditions		Characteristic Values typ.	max.	
I_R	$V_R = V_{RRM}$	T_{VJ} = 25°C		0.25	mA
	$V_R = V_{RRM}$	$T_{VJ} = T_{VJM}$		1.0	mA
V_F	I_F = 30 A	T_{VJ} = 25°C		1.57	V
V_{T0}	for power-loss calculations only			0.98	V
r_T				8	mΩ
R_{thJC}	per diode; DC current			0.9	K/W
R_{thCH}	per diode, DC current, typ.			0.3	K/W
I_{RM}	I_F = 50 A, -diF/dt = 100 A/µs		6	tbd	A
	V_R = 100 V, L = 0.05 mH, T_{VJ} = 100°C				
t_{rr}	I_F = 1 A; -di/dt = 200 A/µs; V_R = 30 V, T_{VJ} = 25°C		35	tbd	ns
a	Max. allowable acceleration		50		m/s^2
d_S	creeping distance on surface		11.2		mm
d_A	creepage distance in air		9.7		mm

Data according to IEC 60747 refer to a single diode unless otherwise stated
① for resistive load at bridge output.

IXYS reserves the right to change limits, test conditions and dimensions.

Features

- Package with DCB ceramic base plate in low profile
- Isolation voltage 3000 V~
- Planar passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering

Applications

- Supplies for DC power equipment
- Input and output rectifiers for high frequency
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Space and weight savings
- Improved temperature and power cycling capability
- Small and light weight
- Low noise switching

Dimensions in mm (1 mm = 0.0394")

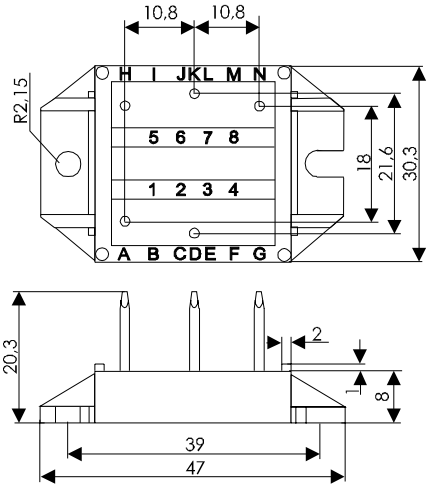

032

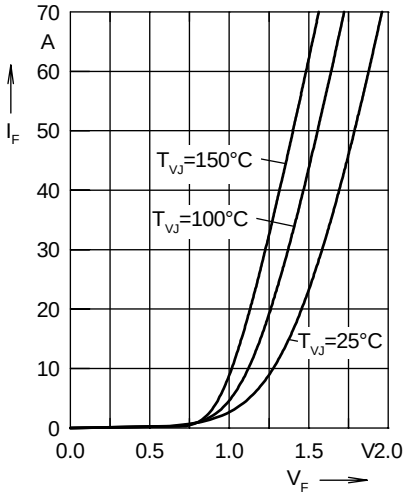

Fig. 1 Forward current I_F versus V_F

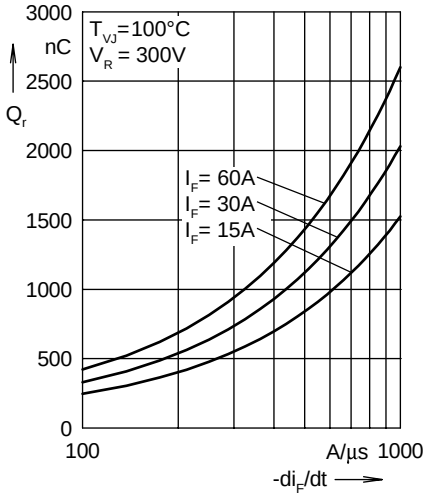

Fig. 2 Reverse recovery charge Q_r versus $-di_F/dt$

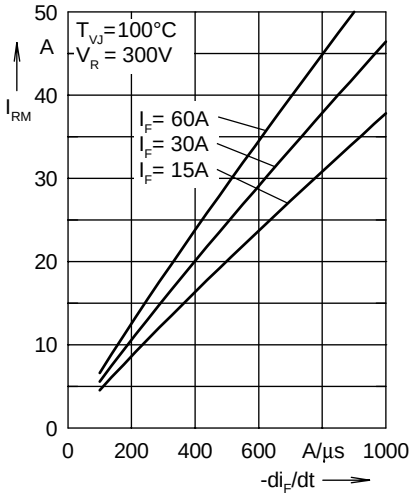

Fig. 3 Peak reverse current I_{RM} versus $-di_F/dt$

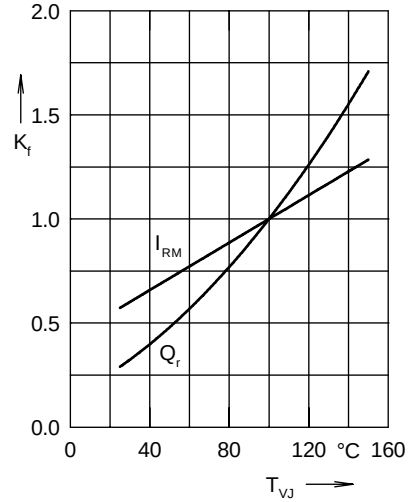

Fig. 4 Dynamic parameters Q_r, I_{RM} versus T_{VJ}

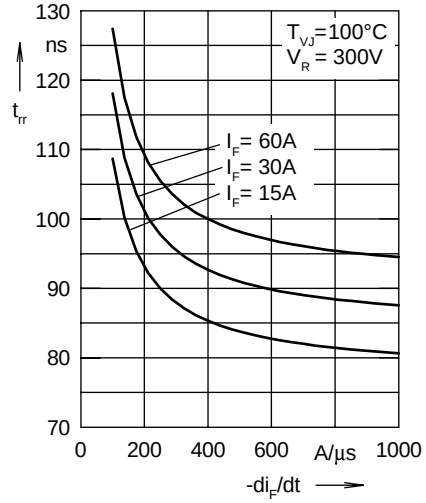

Fig. 5 Recovery time t_{rr} versus $-di_F/dt$

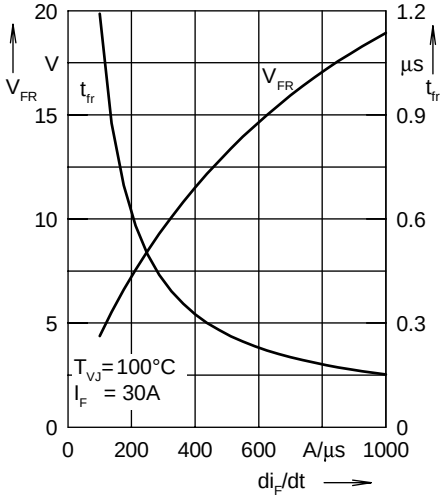

Fig. 6 Peak forward voltage V_{FR} and t_{fr} versus di_F/dt

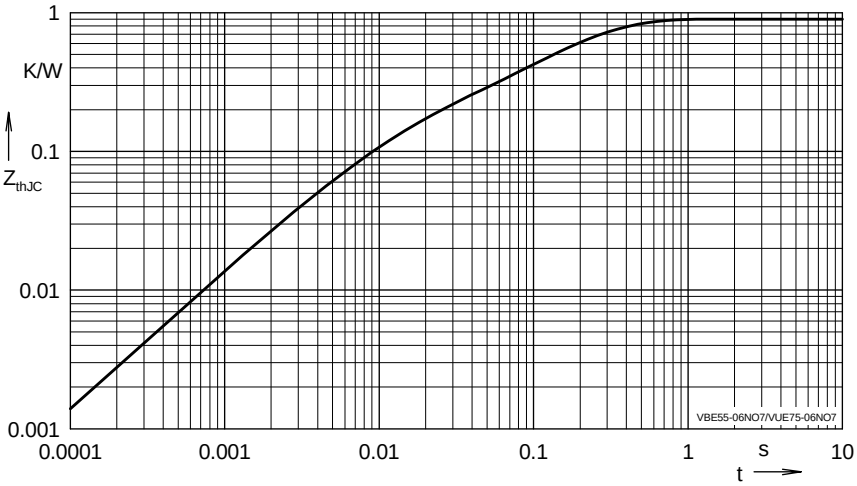

Fig. 7 Transient thermal resistance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.3012	0.0052
2	0.116	0.0003
3	0.0241	0.0004
4	0.4586	0.0092

NOTE: Fig. 2 to Fig. 6 shows typical values

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bridge Rectifiers ***category:***

Click to view products by IXYS ***manufacturer:***

Other Similar products are found below :

MB2510 MB252 MB356G MB358G GBJ1504-BP GBU15J-BP GBU15K-BP GBU4A-BP GBU6B-E3/45 GSIB680-E3/45 DB101-BP DF01 DF10SA-E345 BU1508-E3/45 KBPC50-10S RS405GL-BP G5SBA60-E3/51 GBU10J-BP GBU6M GBU8D-BP GBU8J-BP 2KBB10 36MB140A TB102M MB1510 MB258 MB6M-G MB86 TL401G MDA920A2 TU602 TU810 MP501W-BP MP502-BP BR101-BP BR84DTP204 BU2008-E3/51 KBPC10/15/2501WP KBPC25-02 VS-2KBB60 DF06SA-E345 DF1510S VS-40MT160PAPBF W02M GBL02-E3/45 GBU4G-BP GBJ2506-BP GBU6B-E3/51 GSIB15A80-E3/45 DB104-BP