

QC6CB Series

3.5x6.0 2-Pad SMD All Ceramic Crystal Unit



Features

- All ceramic epoxy sealed SMD package
- Low in height, suitable for thin equipment
- Tight tolerance and stability available

Applications

- High density applications
- Modem, communication and test equipment

General Specifications

| | |
|--|-------------------------------------|
| Frequency Range | 8.000 to 40.000MHz (Fundamental) |
| Frequency Tolerance at 25°C | ±20 to ±50ppm (±30ppm standard) |
| Frequency Stability over Temperature Range | See Stability vs. Temperature Table |
| Storage Temperature | -55 to +125°C |
| Aging per Year | ±5ppm max. |
| Load Capacitance C_L | 10 to 32pF and Series Resonance |
| Shunt Capacitance C_0 | 7.0pF max. |
| Equivalent Series Resistance (ESR) | See ESR Table |
| Drive Level | 100µW typ. (500µW max) |
| Insulation Resistance (MΩ) | 500 at 100Vdc ±15Vdc |

Equivalent Series Resistance (ESR)


| Frequency Range - MHz | Ω max. | Mode of Operation |
|-----------------------|--------|-------------------|
| 8.000 to 10.000 | 100 | Fundamental |
| 10.000 to 12.000 | 80 | Fundamental |
| 12.000 to 16.000 | 60 | Fundamental |
| 16.000 to 40.000 | 30 | Fundamental |

Frequency Stability vs. Temperature

| Operating Temperature | ±20ppm | ±30ppm | ±50ppm |
|-----------------------|--------|--------|--------|
| -20 to +70°C | ○ | ○ | ○ |
| -40 to +85°C | ○ | ● | ○ |

● standard ○ available

Mechanical Dimensions

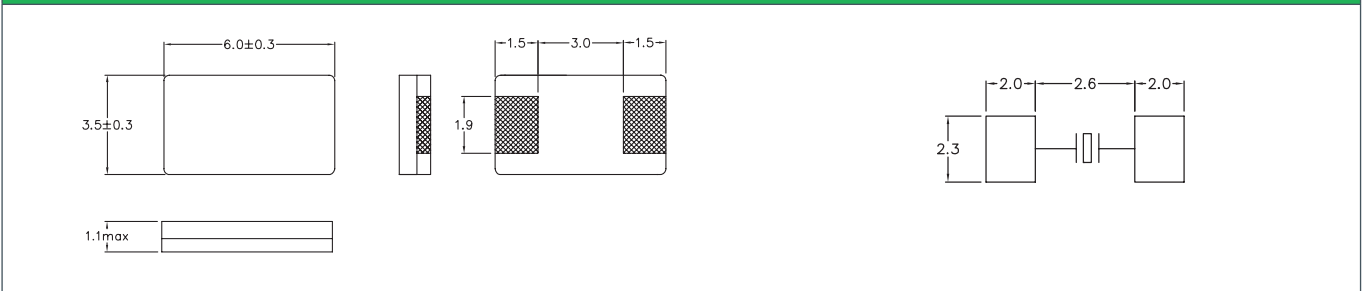

Part Numbering Guide

| Qantek Code | Package | Nominal Frequency (in MHz) | Vibration Mode | Load Capacitance | Operating Temperature Range | Frequency Tolerance | Frequency Stability | Packaging |
|-------------|--------------------------|---|----------------|---|---|---|---|---|
| Q = Qantek | C6CB = 3.5x6.0 2-Pad SMD | 7 digits including the decimal point (f.i.e. 12.0000) | F = AT-Fund | S = Series 12 = 12pF 18 = 18pF 20 = 20pF etc. | A = -20 to +70°C B = -40 to +85°C | 2 = ±20ppm 3 = ±30ppm 5 = ±50ppm | 2 = ±20ppm 3 = ±30ppm 5 = ±50ppm | M = 250pcs Tape&Reel R = 1000pcs Tape&Reel |

Example: QC6CB12.0000F12B33R

bold letters = recommended standard specification



QANTEK Technology Corporation

Phone: +1 877-227-0440 (tollfree)

Fax: +1 877-227-0440 (tollfree)


www.qantek.com

info@qantek.com

QC6CB Series

3.5x6.0 2-Pad SMD All Ceramic Crystal Unit

Tape and Reel Dimensions

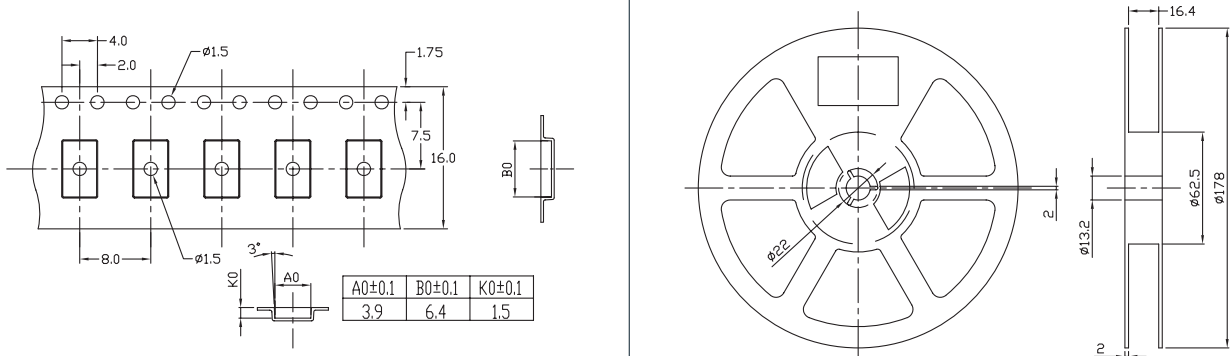


Marking Code Guide

Contains frequency, Qantek manufacturing code, production code (month and year) and load capacitance.

| Month Codes | | | | Year Codes | | | | | | Load Capacitance Code in pF | | | |
|--|---|-----------|---|------------|---|------|---|------|---|-----------------------------|---------|----|---------|
| January | A | July | G | 2010 | 0 | 2011 | 1 | 2012 | 2 | pF | PN Code | pF | PN Code |
| February | B | August | H | 2013 | 3 | 2014 | 4 | 2015 | 5 | 12 | A | 20 | F |
| March | C | September | I | | | | | | | 18 | B | 22 | G |
| April | D | October | J | | | | | | | 8 | C | 30 | H |
| May | E | November | K | | | | | | | 10 | D | 32 | I |
| June | F | December | L | | | | | | | 16 | E | S | S |
| <i>Example: First Line: 12.000 (Frequency) Second Line: QA1A (Qantek - January - 2011 - 12 pF)</i> | | | | | | | | | | | | | |

Solder Reflow Profile

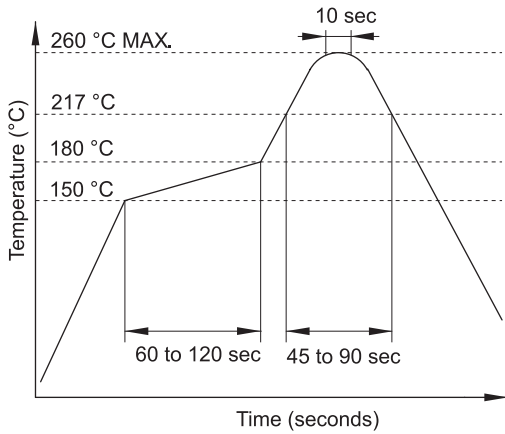

Environmental Specifications

| | |
|------------------|-------------------------------|
| Mechanical Shock | MIL-STD-202, Method 213, C |
| Vibration | MIL-STD-202, Method 201 & 204 |
| Thermal Cycle | MIL-STD, Method 1010, B |
| Gross Leak | MIL-STD-202, Method 112 |
| Fine Leak | MIL-STD-202, Method 112 |

All specifications are subject to change without notice.



QANTEK Technology Corporation
 Phone: +1 877-227-0440 (tollfree)
 Fax: +1 877-227-0440 (tollfree)

www.qantek.com
 info@qantek.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [qantek](#) manufacturer:

Other Similar products are found below :

[QCL9.83040F18B23B](#) [QX14T50B10.00000B50TT](#) [QX14T50B48.00000B50TT](#) [QX8T50B18.43200B50TT](#) [QCS22.1184F18B23M](#)
[QX14T50B18.43200B50TT](#) [QX8T50B1.843200B50TT](#) [QX14T50B7.372800B50TT](#) [QC5CB8.00000F18B23R](#) [QCL27.0000F18B23B](#)
[QC5A10.0000F12B12M](#) [QCL14.31818F18B23B](#) [QX14T50B4.000000B50TT](#) [QX14T50B4.096000B50TT](#) [QX14T50B24.00000B50TT](#)
[QX8T50B25.00000B50TT](#) [QX14T50B25.00000B50TT](#) [QX233A32.00000B15M](#) [QC5A12.0000F12B12M](#) [QCP914.31818F18B35R](#)
[QCS24.5760F18B23M](#) [QCS10.0000F18B23M](#) [QX8T50B8.000000B50TT](#) [QC3CA29.4912F18B23M](#) [QX8T50B20.00000B50TT](#)
[QCS3.68640F18B23M](#) [QX8T50B4.915200B50TT](#) [QX318A24.00000B15M](#) [QCS4.00000F18B23M](#) [QC6A8.00000F18B23M](#)
[QC5CA8.00000F12B23M](#) [QCS32.0000F18B23M](#) [QC1627.1200F08B12M](#) [QC5CA8.00000F18B23M](#) [QC7A32.0000F12B12M](#)
[QC7A19.6608F18B12M](#) [QC3224.0000F12B12M](#) [QCS4.91520F18B23M](#) [QC5A18.4320F12B12M](#) [QC5CA25.0000F12B23M](#)
[QCL24.5760F18B23B](#) [QX733A16.00000B15M](#) [QCS6.00000F18B23M](#) [QX733A32.00000B15M](#) [QC3CA12.2880F12B23M](#)
[QCS12.2880F18B23M](#) [QX733A25.00000B15M](#) [QC7A11.0592F12B12M](#) [QC7A6.00000F12B12M](#) [QC5A27.0000F18B12M](#)