


Standard Rectifier Module

3~ Rectifier	
V_{RRM}	= 1400 V
I_{DAV}	= 75 A
I_{FSM}	= 700 A


3~ Rectifier Bridge

Part number

VUO60-14NO3

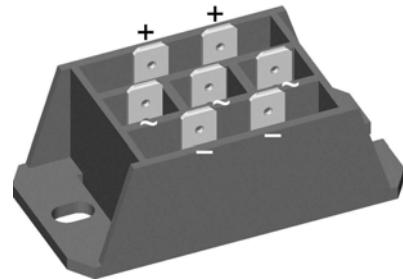

E72873



Features / Advantages:

- Package with DCB ceramic
- Reduced weight
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

Applications:

- Diode for main rectification
- For three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Package: FO-F-B

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- 1/4" fast-on terminals
- Easy to mount with two screws
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Rectifier

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			1500	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			1400	V
I_R	reverse current	$V_R = 1400 V$ $V_R = 1400 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		100 1.5	μA mA
V_F	forward voltage drop	$I_F = 25 A$ $I_F = 75 A$ $I_F = 25 A$ $I_F = 75 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1.06 1.30 0.96 1.27	V V
I_{DAV}	bridge output current	$T_C = 110^\circ C$ rectangular $d = \frac{1}{3}$	$T_{VJ} = 150^\circ C$		75	A
V_{F0} r_F	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 150^\circ C$		0.77 6.5	V $m\Omega$
R_{thJC}	thermal resistance junction to case				1.2	K/W
R_{thCH}	thermal resistance case to heatsink				0.4	K/W
P_{tot}	total power dissipation		$T_C = 25^\circ C$		100	W
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 V$		700 755	A
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 150^\circ C$ $V_R = 0 V$		595 645	A
I^2t	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 V$		2.45 2.37	kA ² s
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 150^\circ C$ $V_R = 0 V$		1.77 1.73	kA ² s
C_J	junction capacitance	$V_R = 400 V; f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$		25	pF




Package FO-F-B			Ratings		
Symbol	Definition	Conditions	min.	typ.	max.
					Unit
I_{RMS}	RMS current	per terminal			100 A
T_{stg}	storage temperature		-40		125 °C
T_{vJ}	virtual junction temperature		-40		150 °C
Weight				45	g
M_D	mounting torque		2		2.5 Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air		terminal to terminal	18.0	6.0 mm
$d_{Spb/Apb}$			terminal to backside	26.0	20.0 mm
V_{ISOL}	isolation voltage	t = 1 second t = 1 minute	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA		3600 V 3000 V



Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	VUO60-14NO3	VUO60-14NO3	Box	10	465321

Equivalent Circuits for Simulation		* on die level	$T_{vJ} = 150$ °C
	Rectifier		
$V_{0\max}$	threshold voltage	0.77	V
$R_{0\max}$	slope resistance *	5.3	mΩ

Outlines FO-F-B

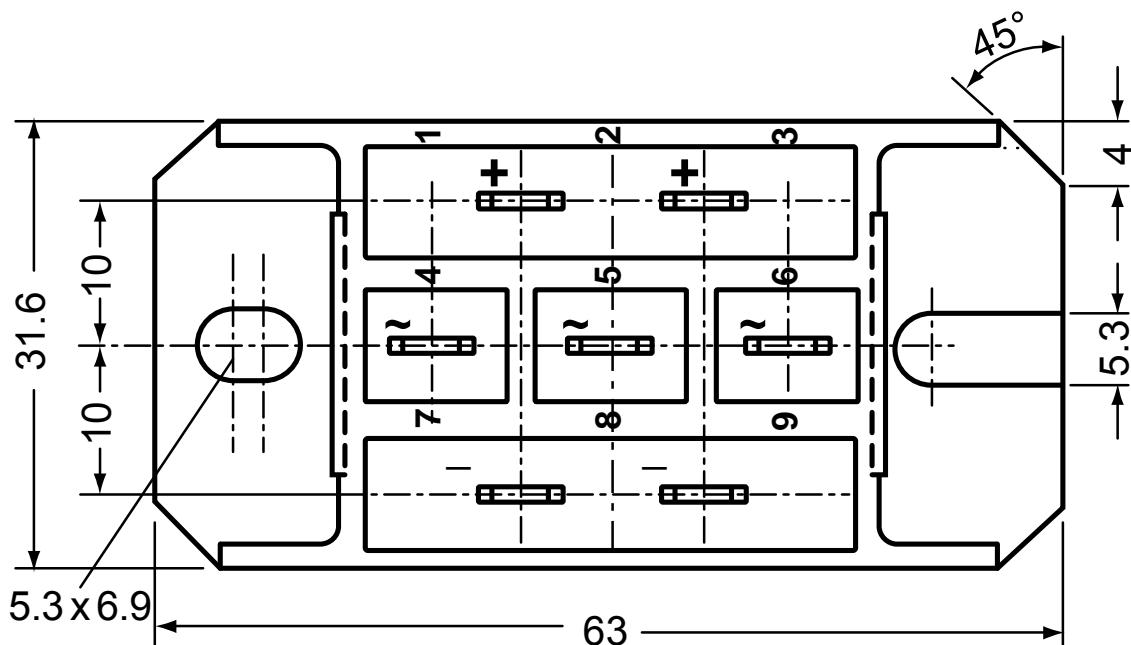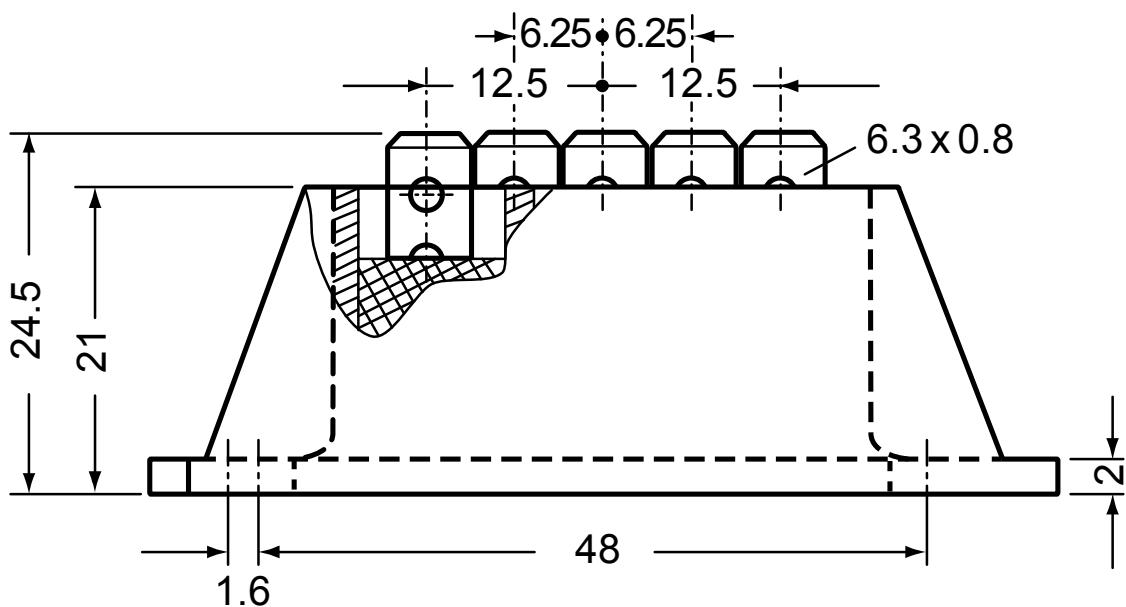

Rectifier

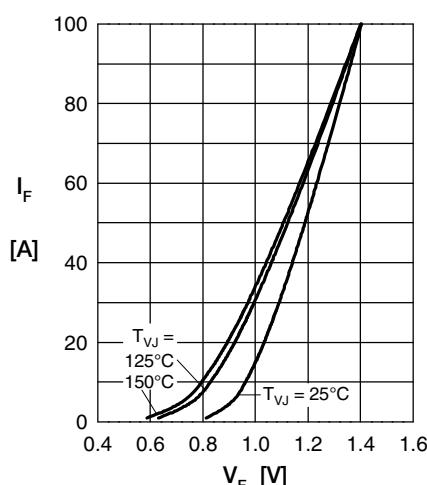


Fig. 1 Forward current vs. voltage drop per diode

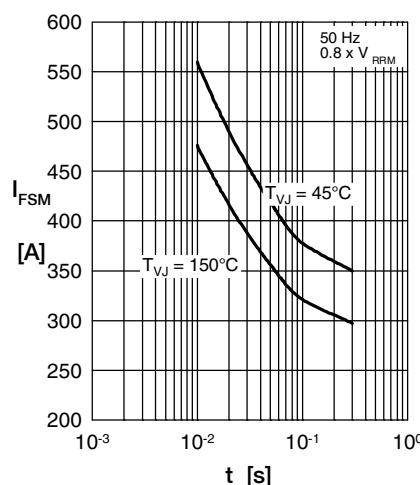


Fig. 2 Surge overload current vs. time per diode

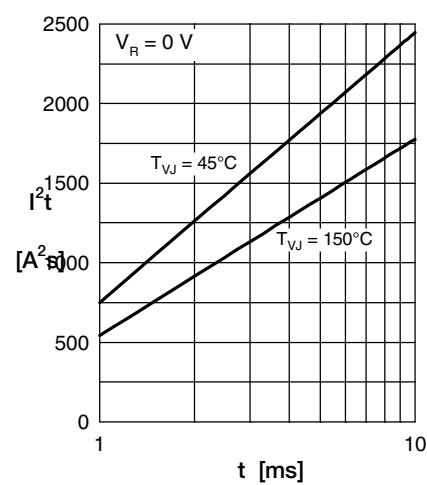
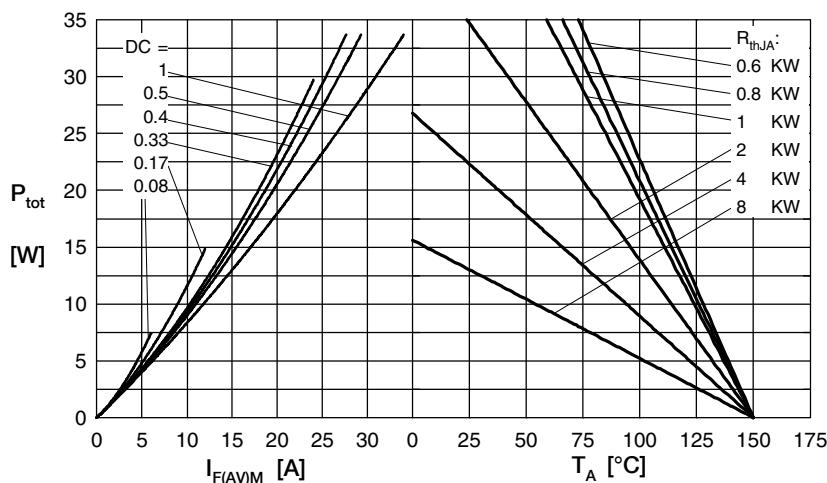
Fig. 3 I^2t vs. time per diode

Fig. 4 Power dissipation vs. forward current and ambient temperature per diode

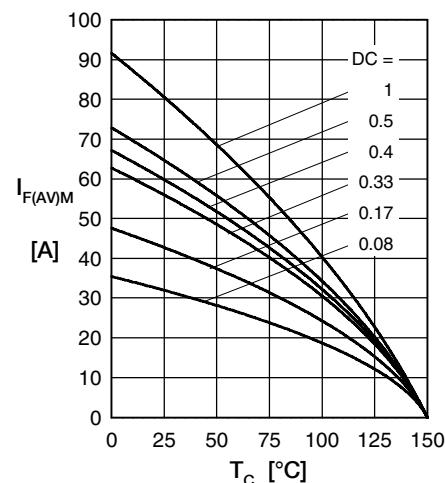


Fig. 5 Max. forward current vs. case temperature per diode

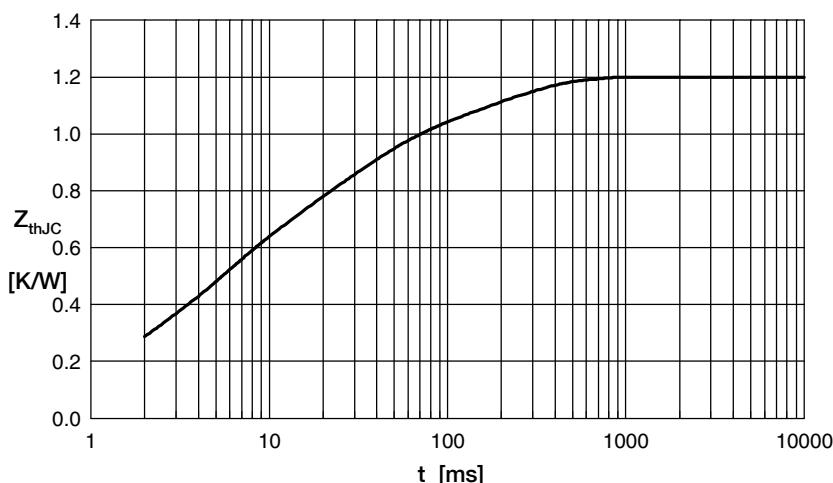


Fig. 6 Transient thermal impedance junction to case vs. time per diode

Constants for Z_{thJC} calculation:

i	R_{th} (K/W)	t_i (s)
1	0.0607	0.00040
2	0.1330	0.00256
3	0.3305	0.00450
4	0.4130	0.02420
5	0.2628	0.18000

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bridge Rectifiers](#) category:

Click to view products by [IXYS manufacturer:](#)

Other Similar products are found below :

[G3SBA60-E351](#) [GBJ1504-BP](#) [GBU10B-BP](#) [GBU15J-BP](#) [GBU15K-BP](#) [GBU4A-BP](#) [GBU4D-BP](#) [GBU6B-E3/45](#) [GSIB680-E3/45](#) [DB101-BP](#) [DBA100G](#) [DBA150G](#) [DBA20G](#) [DBA250G](#) [DBA40G](#) [DBD10G-TM-E](#) [DBF10G](#) [DBF250G](#) [DBG150G](#) [DBG250G](#) [DF10SA-E345](#) [RMB2S RCG](#) [APT30DF100HJ](#) [APT60DF20HJ](#) [B2S-E3/80](#) [BU1506-E351](#) [BU15085S-E345](#) [BU1508-E3/45](#) [BU1510-E3/45](#) [RS404GL-BP](#) [RS405GL-BP](#) [G3SBA20-E3/51](#) [G5SBA20-E3/51](#) [G5SBA60-E3/51](#) [GBJ1502-BP](#) [GBL02-E351](#) [GBL10-E3/45](#) [GBU10J-BP](#) [GBU4J-BP](#) [GBU4K-BP](#) [GBU8B-E3/45](#) [GBU8D-BP](#) [GBU8J-BP](#) [GSIB1520-E3/45](#) [MB1510](#) [MB352W](#) [MB6M-G](#) [B2M-E345](#) [B40C7000A](#) [B500C7000A](#)