PART NUMBER		GT-NE6S1325T		REV.	C
DATE	E.C.N. NUMBER AND REVISION COMMENTS				REV.
02.18.00	E.C.N. #10594. & 10BRDR.				A
12.13.06	E.C.N. #11148.				B
01.03.12	E.C.N. #10BRDR.				C

ⵁ6.50 [0.256] MAX.

13.00 [0.512] MAX.

25.40 [1.000]

ⵁ0.40 [0.016] (2 PLS.)

3.00 [0.118]
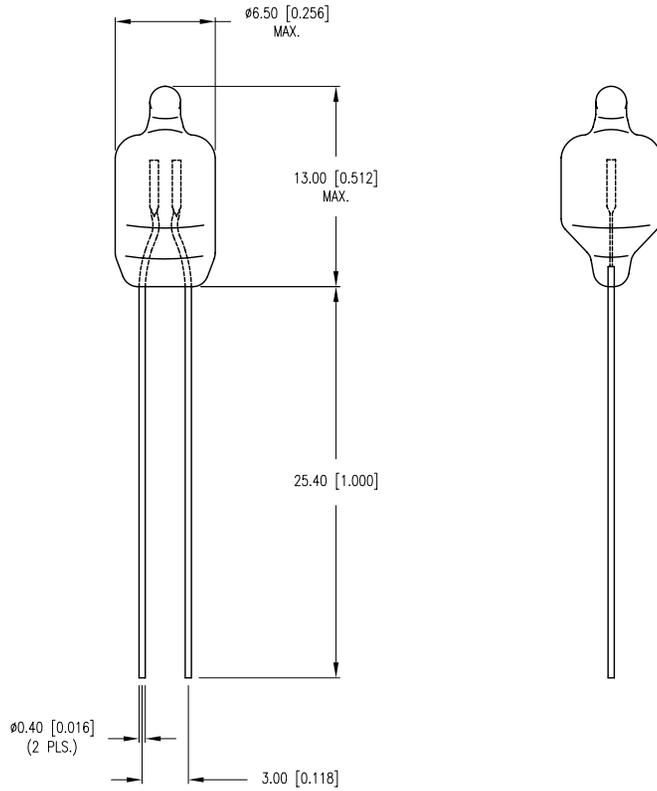
ELECTRO-OPTICAL CHARACTERISTICS

[A] PARAMETER	MIN	TYP	MAX	UNITS
OPERATING VOLTAGE	90		115	V
STARTING VOLTAGE (AC)			65	V
(DC)			90	V
OPERATING CURRENT:				
W/ 150K OHM RES.		0.3		mA @ 110V
LIGHT OUTPUT		120		mLM
LIFE HOURS		25,000		HOURS
EMITTED COLOR:	ORANGE			

[A] NOTES:

1. EXTERNAL RESISTOR VALUE 150K OHMS.
2. PARTS TO BE IN A SEALED BAG WITH DESICANT.
3. LEAD FINISH: SILVER PLATED LEADS.
4. CORONA MUST COVER A MINIMUM OF 25% OF THE ELECTRODE WITH NO FLICKERING.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION −0.00 MAX.= +0.00 −DECIMAL PRECISION

LUMEX®
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

6.5mm x 13mm NEON LAMP, STANDARD BRIGHTNESS.

DATE:	01.03.12	DRAWN BY:	AB
PAGE:	1 OF 1	CHKD BY:	SS
SCALE:	NTS	APRVD BY:	JD
UNIT:	mm [INCH]		Pb

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Lamps *category:*

Click to view products by Lumex *manufacturer:*

Other Similar products are found below :

5AB 6180 8623 912 120PS 1224 DE603 DW50 IFL-LX2162-16T C9A C9A 3015 303 19 PR13 268 GT-NE6H1225T CM5004WW 32-2211T 323 509K 5314N1 5314N2 WWT1-EW10/GRN 4925H1 DW07 10C7DC-120V 1141 MS25231-313 E73 CM2 7683EBP 8553 XE135B WWT2-EW34BLA 6S6/30V 7367 1301910036 7A1H 8630FBBB WT3F-20 85 106 105 BGF717-UV1 1974D 1495 373 400 502