# 1:4 E-Series, RF Flux Coupled Transformer 2 - 800 MHz



MABAES0061

Rev. V9

#### **Features**

- Surface Mount Package
- 1:4 Impedance Ratio
- · CT on Secondary
- Available on Tape & Reel
- RoHS\* Compliant version of ETC4-1-2

## **Applications**


• Wireless Networking & Communication

## **Description**

The MABAES0061 is a RoHS compliant device that is equivalent to the ETC4-1-2 transformer. This device is a 1:4 RF flux coupled step-up transformer. This transformer is offered in a SM-22 surface mount package and is designed to be utilized in both standard reflow and high temperature soldering reflow profiles.

Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching.

#### **Functional Schematic**



### Pin Configuration

Pin #	Function		
1	Secondary		
2	Secondary CT		
3	Secondary Dot		
4	Primary Dot		
5	Primary		

## Electrical Specifications: Freq. = 2 - 800 MHz, $T_A$ = 25°C, $Z_0$ = 50 $\Omega$ , $P_{in}$ = 0 dBm

Parameter	Conditions	Units	Min.	Тур.	Max.
Impedance Ratio	_	ratio	_	1:4	
Insertion Loss (f <sub>L</sub> - f <sub>U</sub> )	10 - 100 MHz 5 - 600 MHz 2 - 800 MHz	dB	_	1.21 —	1.0 2.0 3.0
Amplitude Unbalance	10 - 100 MHz 2 - 800 MHz	dB	_	_	0.25 1.00
Phase Unbalance	10 - 500 MHz 2 - 800 MHz	0	_	_	2 10

## **Ordering Information**

Part Number	Description
MABAES0061	2000 piece reel

## **Absolute Maximum Ratings<sup>1</sup>**

Parameter	Absolute Maximum		
RF Input Power	250 mW		
DC Current	240 mA <sup>2</sup>		
Dielectric Withstanding Voltage	>2050 V		
Operating Temperature	-55°C to +85°C		

<sup>1.</sup> Operation of this device above any one of these parameters may cause permanent damage.

<sup>2.</sup> The maximum DC current applies to the secondary center tap in applications where the secondary is balanced.




## MABAES0061


Rev. V9

## Typical Performance Curves over extended Bandwidth (30 KHz - 1 GHz)


Insertion Loss (-3 to -13 dB) vs. Frequency (30 kHz to 1 GHz)

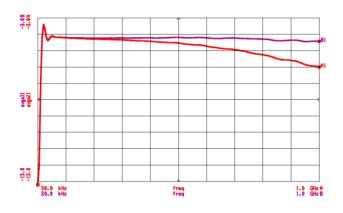


Phase Unbalance (0 to 360 deg.) vs. Frequency (30 kHz to 1 GHz)

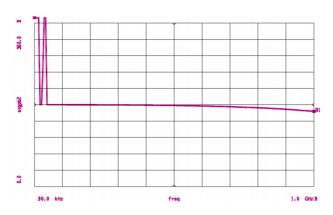

Amplitude Unbalance (5 to -5 dB) vs. Frequency (30 kHz to 1 GHz)

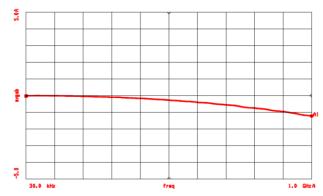

Input Impedance on Smith Chart vs. Frequency (30 kHz to 1 GHz)

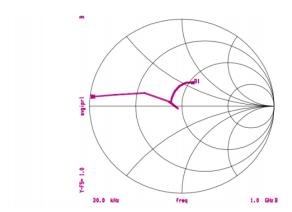


# 1:4 E-Series, RF Flux Coupled Transformer 2 - 800 MHz



MABAES0061

Rev. V9

## Lead-Free Outline Drawing

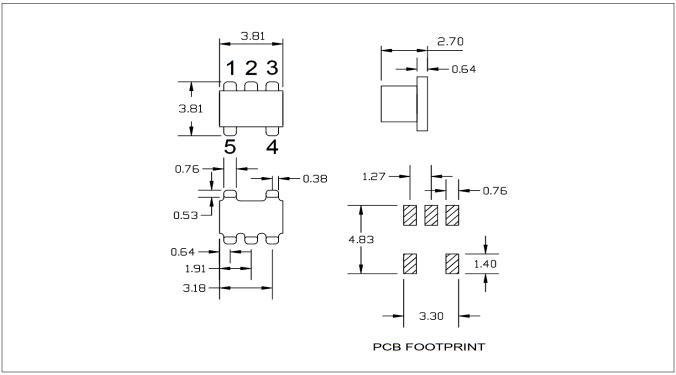

Dimensions in mm.

Tolerance: ±0.2 mm unless otherwise noted.

Model number and lot code are printed on the reel.

## 1:4 E-Series, RF Flux Coupled Transformer 2 - 800 MHz



MABAES0061

Rev. V9

#### MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Audio Transformers / Signal Transformers category:

Click to view products by MACOM manufacturer:

Other Similar products are found below:

CX2041NLT MGPWT-00449-P PE-64961 H1302FNLT H5008FNL H5012FNL H5020FNLT H5077NLT H5084FNLT

B78476A9558A003 1812WBT2-4 1879479-1 HX2260FNL HX5014FNL EX2024FNL FL1066 T1137NLT T3012NL PE-65812FNL PE65848FNLT H1174FNL H1302FNL H5015FNL H5019EFNL H5062FNLT CX2047LNL MGPWT-00059-P MGPWT-00266-P MGPWT00278-P MGPWT-00431-P TTC-100 TTC-143-H TTC-5032-1 BX1194WNLT HX1234NLT HX5008FNLT HX5019FNL HX5084NL 31879385-5 TX1263NLT 4-1879391-0 T1142NL HX6101FNL HX5084FNL HX1148NL HX5020FNLT HX5014FNLT T1124NL
1879732-1 2-1879391-5